

Transformer Protection



35TH ANNUAL
HANDS-ON
Relay School
MARCH 12-16, 2018
PULLMAN, WASHINGTON

Wayne Hartmann

Senior VP, Customer Excellence

Beckwith Electric Company

whartmann@beckwithelectric.com

904-238-3844



Wayne is the top strategist for delivering innovative technology messages to the Electric Power Industry through technical forums and industry standard development.

- Before joining Beckwith Electric, performed in Application, Sales and Marketing Management capacities at PowerSecure, General Electric, Siemens Power T&D and Alstom T&D.
- Provides training and mentoring to Beckwith Electric personnel in Sales, Marketing, Creative Technical Solutions and Engineering.
- Key contributor to product ideation and holds a leadership role in the development of course structure and presentation materials for annual and regional Protection & Control Seminars.
- Senior Member of IEEE, serving as a Main Committee Member of the Power System Relaying and Control Committee for over 25 years.
 - Chair Emeritus of the IEEE PSRCC Rotating Machinery Subcommittee ('07-'10).
 - Contributed to numerous IEEE Standards, Guides, Reports, Tutorials and Transactions, delivered Tutorials IEEE Conferences, and authored and presented numerous technical papers at key industry conferences.
- Contributed to McGraw-Hill's "Standard Handbook of Power Plant Engineering."


Exploration

- Why transformers fail
- Quick review of protection principles and modern technology differences/advantages
- IEEE C37.91, Guide for Power Transformer Protection
- Discuss non-electrical protections
- Discuss electrical protections
 - Overcurrent based
 - Through fault protection
 - Overexcitation
 - Differential
 - CT performance issue
 - Transformer protection challenges
 - Percentage differential characteristic
 - Restraints for inrush and overexcitation
- Realization of settings
- Analysis tools to view relay operation


Transformers: T & D




Transformers: T & D

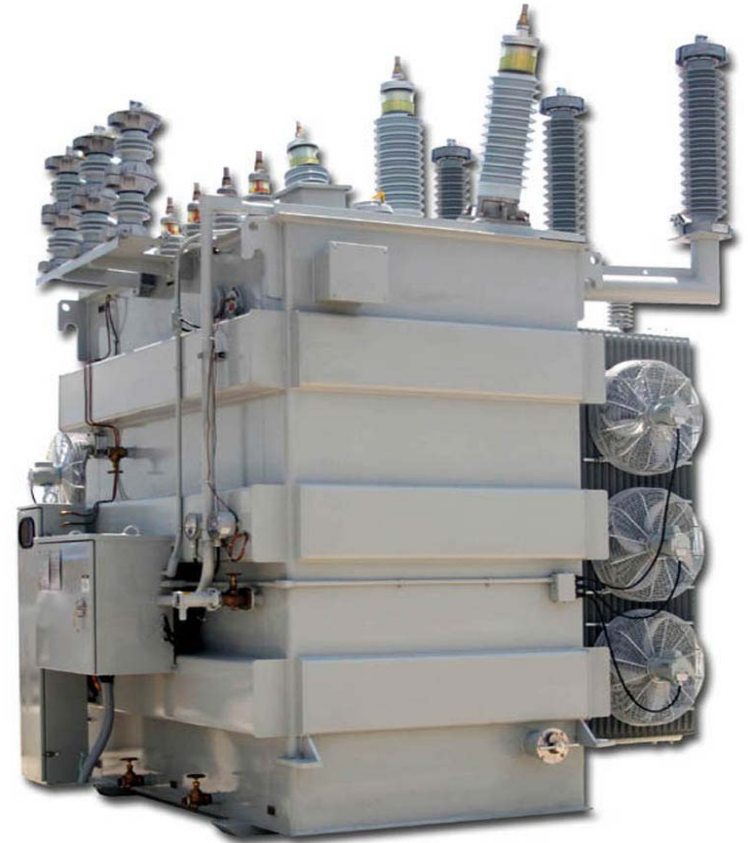

Transformer: GSU Step Up

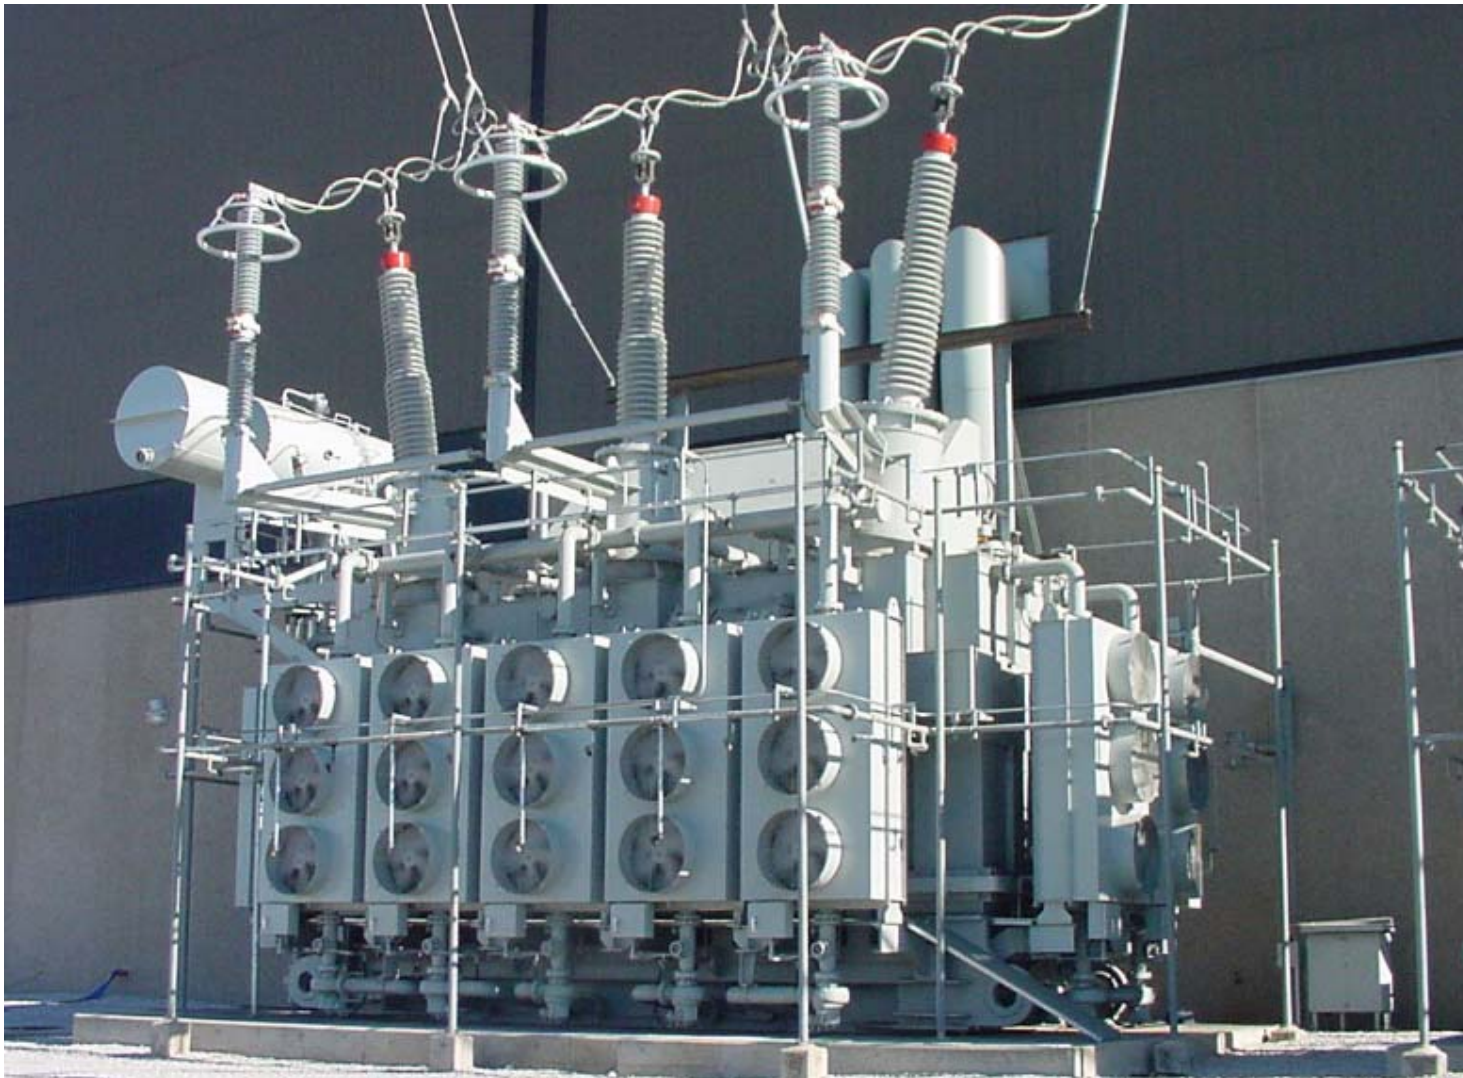

Key Components

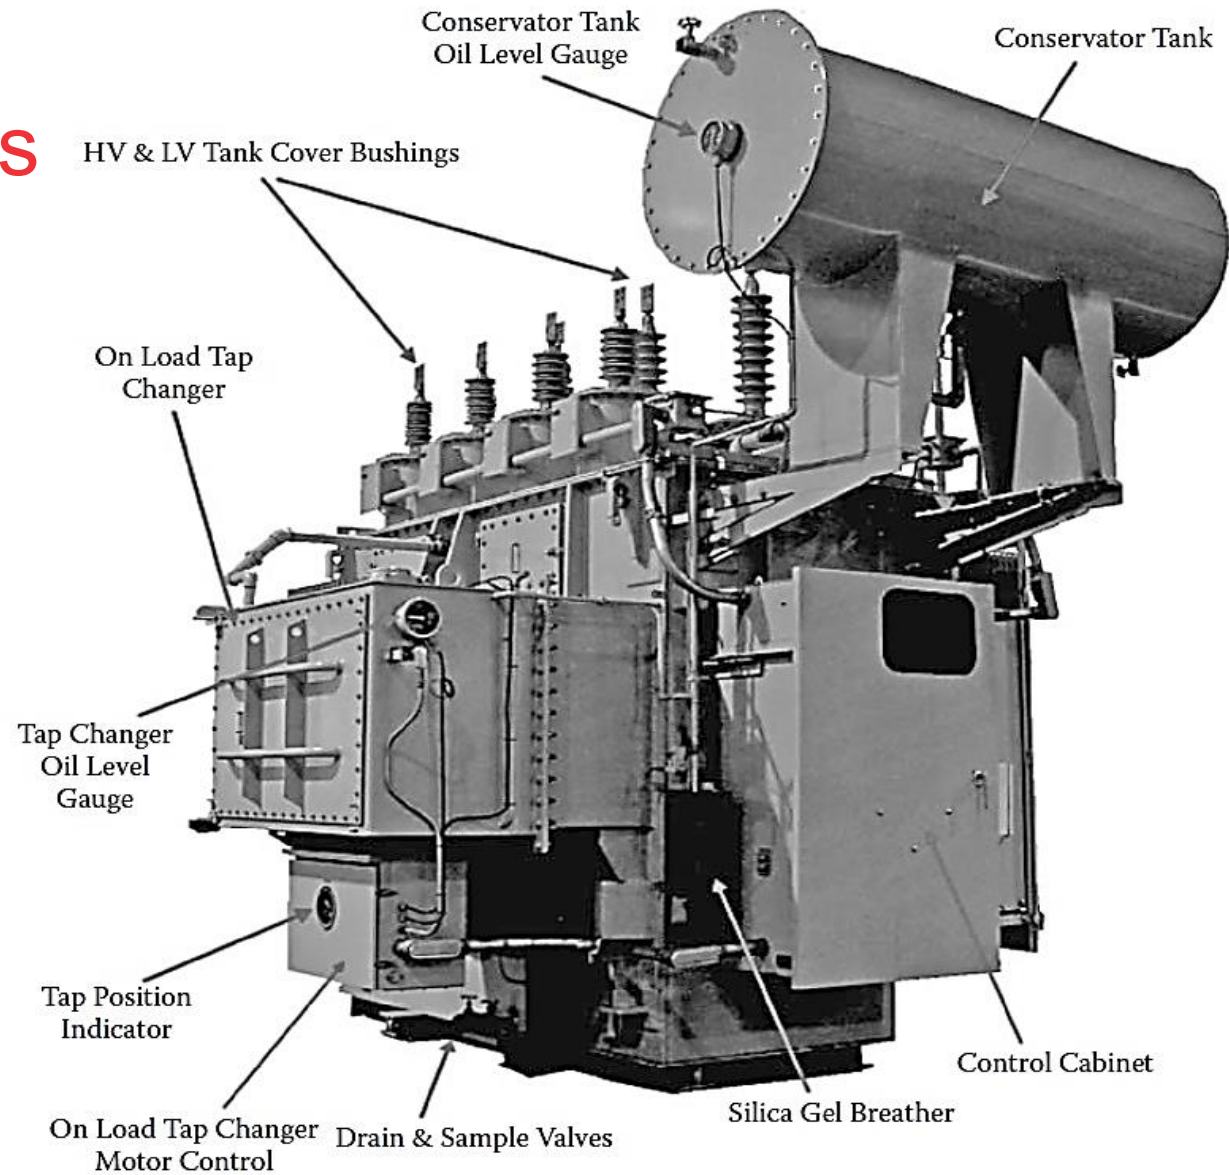

Conservator design 15/20 MVA 72kV-25kV

FAILURE!



FAILURE!



FAILURE!



Why Do Transformers Fail?

- The electrical windings and the magnetic core in a transformer are subject to a number of different forces during operation:
 - Expansion and contraction due to thermal cycling
 - Vibration
 - Local heating due to magnetic flux
 - Impact forces due to through-fault current
 - Excessive heating due to overloading or inadequate cooling



Costs and Other Factors To Be Considered

- Cost of repairing damage
- Cost of lost production
- Adverse effects on the balance of the system
- The spread of damage to adjacent equipment
- The period of unavailability of the damaged equipment





What Fails in Transformers?

- **Windings**

- Insulation deterioration from:
 - Moisture
 - Overheating
 - Vibration
 - Voltage surges
 - Mechanical Stress from through-faults

- **LTCs**

- Malfunction of mechanical switching mechanism
- High resistance contacts
- Overheating
- Contamination of insulating oil

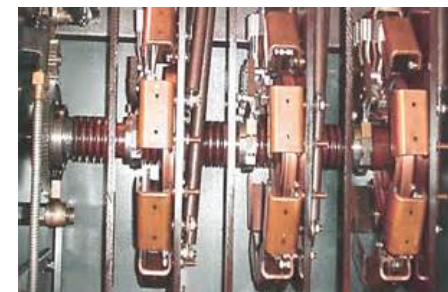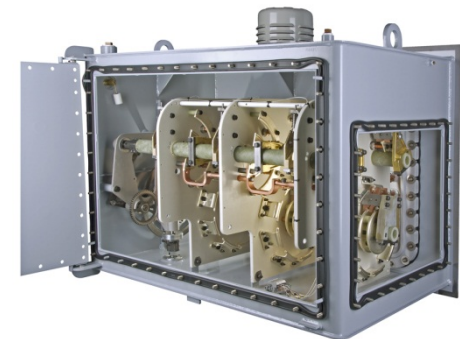

What Fails in Transformers?

■ Bushings

- General aging
- Contamination
- Cracking
- Internal moisture






■ Core Problems

- Core insulation failure
- Open ground strap
- Shorted laminations
- Core overheating



Core Construction

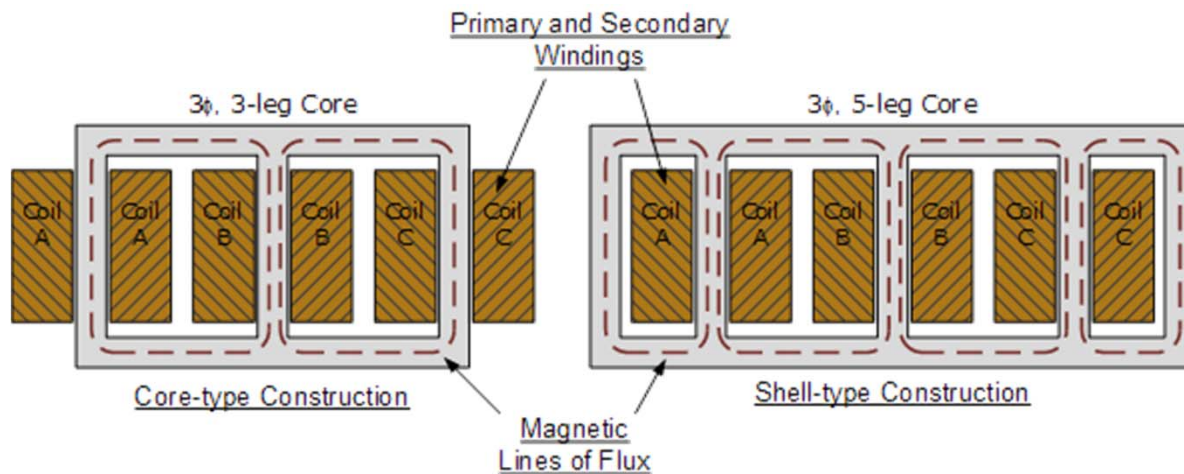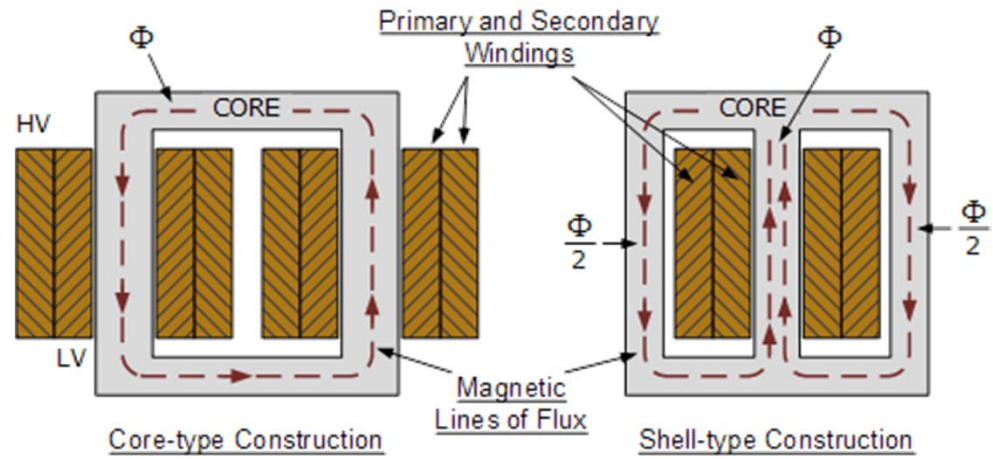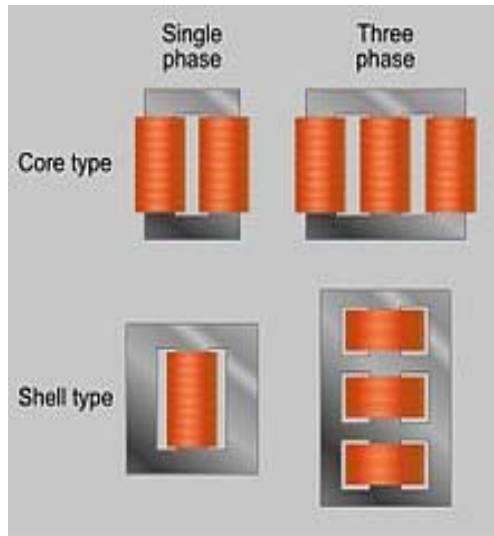


- Shell construction is lighter than core construction
- 3-leg shell core causes zero sequence coupling

What Fails in Transformers?



■ Miscellaneous

- CT Issues
- Oil leakage
- Oil contamination
 - Metal particles
 - Moisture

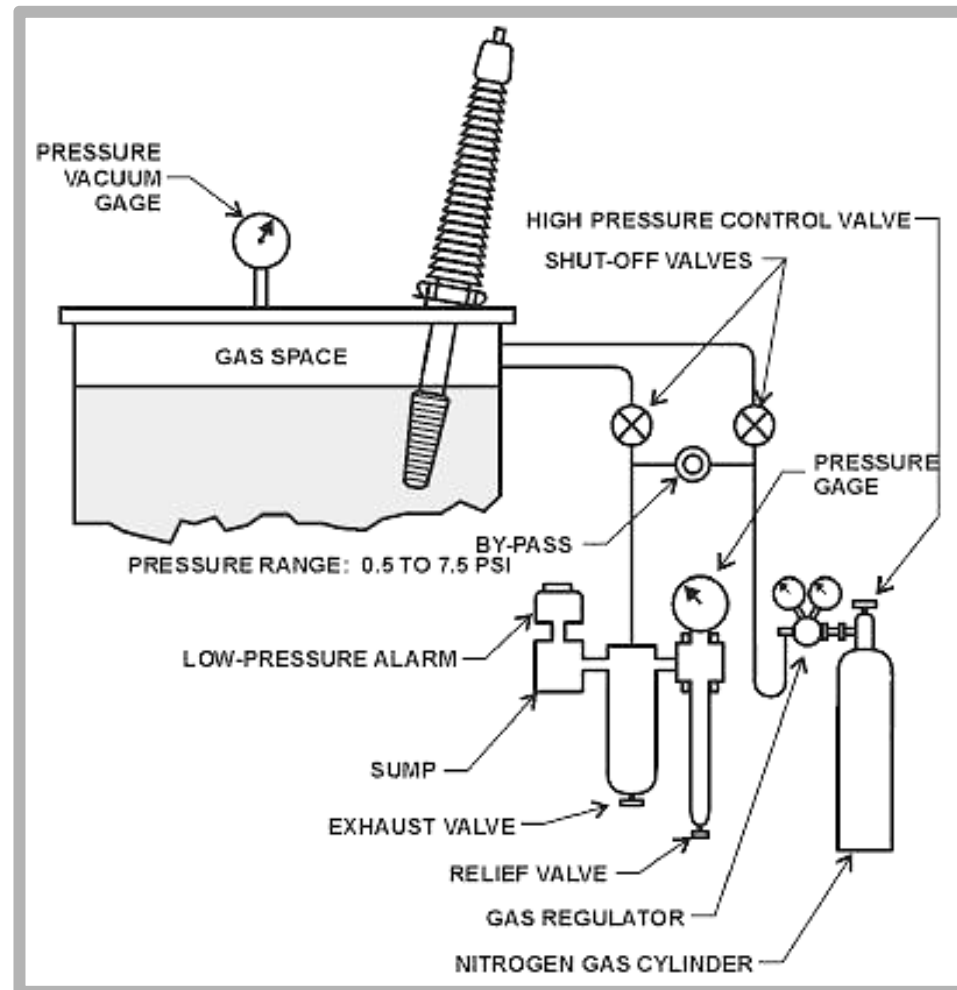

Failure Statistics of Transformers

Failure Statistics of Transformers

	1955- 1965		1975- 1982		1983- 1988	
	Number	% of Total	Number	% of Total	Number	% of Total
Winding failures	134	51	615	55	144	37
Tap changer failures	49	19	231	21	85	22
Bushing failures	41	15	114	10	42	11
Terminal board failures	19	7	71	6	13	3
Core failures	7	3	24	2	4	1
Miscellaneous	12	4	72	6	101	26
Total	262	100	1127	100	389	100

Failure Statistics of Transformers: 110kV-149kV

Table B.2—Transformer bank analysis by subcomponents for operating voltages from 110 kV to 149 kV

Component years (a)	Subcomponent	No. of outages	Frequency per year	Total time (h)	Mean duration (h)	Median duration (h)	Mean op. pos. (h)
9302	Bushings including CTs	93	0.0100	22 144	238.1	14.58	226.3
	Windings	31	0.0033	24 876	802.5	10.35	130.1
	On-load tap changer	187	0.0201	51 806	277.0	26.78	274.5
	Core	15	0.0016	493	32.9	1.27	32.9
	Leads	2	0.0002	17	8.6	8.56	8.6
	Cooling equipment	28	0.0030	1 590	56.8	17.61	56.8
	Auxiliary equipment	24	0.0026	6 166	256.9	18.76	256.9
	Other	162	0.0174	37 455	231.2	24.80	231.2
	All integral components	542	0.0583	144 547	266.7	22.82	225.3

	Control and protection equipment	323	0.0347	23 407	72.5	1.78	72.5
	Surge arrester	31	0.0033	3 104	100.1	14.33	100.1
	Bus	61	0.0066	14 132	231.7	1.18	231.7
	Disconnect	157	0.0169	28 664	182.6	24.00	182.6
	Circuit switcher	3	0.0003	71	23.6	4.85	23.6
	CT (free standing)	11	0.0012	1 585	144.1	4.23	144.1
	Potential devices	27	0.0029	6 971	258.2	73.95	258.2
	Motor-operated ground switch	31	0.0033	7 661	247.1	22.58	247.1
	Other	64	0.0069	1 977	30.9	2.94	30.9
	Unknown	220	0.0237	34 341	156.1	14.03	156.1
	All terminal equipment	928	0.0998	121 911	131.4	6.66	131.4

Failure Statistics of Transformers: 150kV-199kV

Table B.3—Transformer bank analysis by subcomponents for operating voltages from 150 kV to 199 kV

Component years (a)	Subcomponent	No. of outages	Frequency per year	Total time (h)	Mean duration (h)	Median duration (h)	Mean op. pos. (h)
594	Bushings including CTs	18	0.0303	11 143	619.1	4.88	619.1
	Windings	2	0.0034	6 678	3 339.2	3 339.24	3 339.2
	On-load tap changer	28	0.0471	16 109	575.3	57.76	575.3
	Core	0					
	Leads	0					
	Cooling equipment	6	0.0101	2 151	358.5	239.53	358.5
	Auxiliary equipment	18	0.0303	955	53.0	12.00	53.0
	Other	16	0.0269	12 493	780.8	248.86	780.8
	All integral components	88	0.1481	49 529	562.8	32.00	562.8
		Control and protection equipment	19	0.0320	6 439	338.9	23.90
	Surge arrester	7	0.0118	973	139.0	37.10	139.0
	Bus	4	0.0067	3	0.6	0.62	0.6
	Disconnect	26	0.0438	27 024	1 039.4	127.53	1 039.4
	Circuit switcher	0					
	CT (free standing)	1	0.0017	4 626	4 625.6	4 625.63	4 625.6
	Potential devices	8	0.0135	3 350	418.7	122.70	418.7
	Motor-operated ground switch	3	0.0051	688	229.3	104.43	229.3
	Other	1	0.0017	1	0.7	0.68	0.7
	Unknown	9	0.0152	628	69.8	0.70	69.8
	All terminal equipment	78	0.1313	43 730	560.6	28.04	560.6

Failure Statistics of Transformers: 200kV-299kV

Table B.4—Transformer bank analysis by subcomponents for operating voltages from 200 kV to 299 kV

Component years (a)	Subcomponent	No. of outages	Frequency per year	Total time (h)	Mean duration (h)	Median duration (h)	Mean op. pos. (h)
5940.0	Bushings including CTs	32	0.0054	6 283	196.3	13.83	196.3
	Windings	19	0.0032	23 225	1222.4	68.97	891.0
	On-load tap changer	90	0.0152	25 148	279.4	12.81	279.4
	Core	5	0.0008	557	111.5	30.18	111.5
	Leads	5	0.0008	140	28.0	2.58	28.0
	Cooling equipment	34	0.0057	2 187	64.3	3.64	64.3
	Auxiliary equipment	35	0.0059	9 024	257.8	9.25	257.8
	Other	90	0.0152	21 719	241.3	29.14	241.3
	All integral components	310	0.0522	88 284	284.8	16.92	264.5

	Control and protection equipment	207	0.0348	8 280	40.0	2.70	40.0
	Surge arrester	27	0.0045	1 491	55.2	23.55	55.2
	Bus	15	0.0025	282	18.8	6.13	18.8
	Disconnect	59	0.0099	14 469	245.2	31.40	245.2
	Circuit switcher	1	0.0002	3	3.2	3.23	3.2
	CT (free standing)	3	0.0005	401	133.8	68.17	133.8
	Potential devices	9	0.0015	106	11.8	8.52	11.8
	Motor-operated ground switch	6	0.0010	1 059	176.4	9.03	176.4
	Other	41	0.0069	1 224	29.9	3.45	29.9
	Unknown	120	0.0202	5 990	49.9	18.23	49.9
	All terminal equipment	488	0.0822	33 305	68.2	9.03	68.2

Analysis of Transformer Failures*

Table 1 – Number and Amounts of Losses by Year

Table 1	Total # of Losses	Total Loss	Total Property Damage	Total Business Interruption
1997	19	\$ 40,779,507	\$ 25,036,673	\$ 15,742,834
1998	25	\$ 24,932,235	\$ 24,897,114	\$ 35,121
1999	15	\$ 37,391,591	\$ 36,994,202	\$ 397,389
2000	20	\$ 150,181,779	\$ 56,858,084	\$ 93,323,695
2001	15	\$ 33,343,700	\$ 19,453,016	\$ 13,890,684
Grand Total	94	\$ 286,628,811	\$ 163,239,089	\$ 123,389,722

* Total losses in 2000 includes one claim with a business interruption portion of over \$86 million US

Table 1A – Number and Amounts of Losses by MVA and Year


Table 1 A	Total # of Losses	Losses w/data	Total MVA reported	Total PD (with size data)	Cost /MVA
1997	19	9	2567	\$20,456,741	\$7969
1998	25	25	5685	\$24,897,114	\$4379
1999	15	13	2433	\$36,415,806	\$14967
2000	20	19	4386	\$56,354,689	\$12849
2001	15	12	2128	\$16,487,058	\$7748
Total	94	78	17,199	\$15,4611,408	

During this five year period, the average cost is \$8,990 per MVA, or about \$9 per kVA.

*Data taken from "Analysis of Transformer Failures" by William H Bartley, Presented at the International Association of Engineering Insurers 36th Annual Conference – Stockholm, 2003

ANSI / IEEE C37.91-2008

“Guide for Protective Relay Applications for Power Transformers”

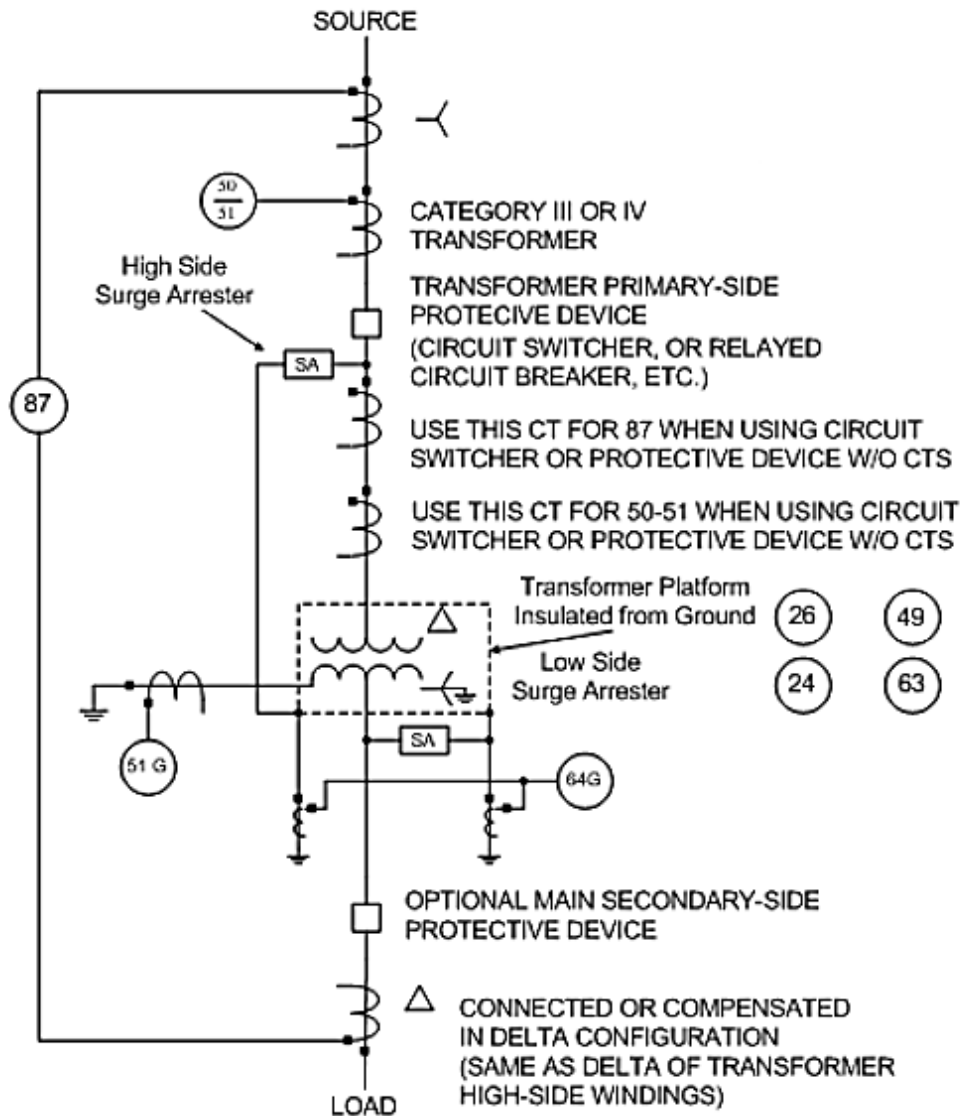

- 87 = Phase Diff
- 51G = Ground Overcurrent
- 50/51 = Phase Overcurrent
- 64G = Transformer Tank Ground Overcurrent
- 26 = Thermal Device
- 49 = Thermal Overload
- 24 = Overexcitation
- 63 = Gas Relay (SPR, Buchholz)

Class III and IV Transformers
($\geq 5\text{MVA}$)

IEEE Devices used in Transformer Protection

- **24:** Overexcitation (V/Hz)
- **26:** Thermal Device
- **46:** Negative Sequence Overcurrent
- **49:** Thermal Overload
- **50:** Instantaneous Phase Overcurrent
- **50G:** Instantaneous Ground Overcurrent
- **50N:** Instantaneous Residual Overcurrent
- **50BF:** Breaker Failure
- **51G:** Ground Inverse Time Overcurrent
- **51N:** Residual Inverse Time Overcurrent
- **63:** Sudden Pressure Relay (Buccholtz Relay)
- **64G:** Transformer Tank Ground Overcurrent
- **81U:** Underfrequency
- **87H:** Unrestrained Phase Differential
- **87T:** Transformer Phase Differential with Restraints
- **87GD:** Ground Differential (also known as “restricted earth fault”)



Transformer Protection Review

- **Internal Short Circuits**
 - Phase Faults
 - Ground Faults




- **System Short Circuits (Back Up Protection)**
 - Buses and Lines
 - Phase Faults
 - Ground Faults

- **Abnormal Conditions**
 - Open Circuits
 - Overexcitation
 - Abnormal Frequency
 - Abnormal Voltage
 - Breaker Failure
 - Overload
 - Geo-magnetically induced current (GIC)



Special Subject: GIC

- ❑ Occurs in near polar and polar latitudes
- ❑ Result of solar storms impacting earth and causing induction and current loops
- ❑ Currents are DC and cause saturation of power transformers
- ❑ Proactive protection consists of:
 - Deliberate system compartmentalizing or transformer isolation
 - Use of capacitors on transformer grounds to block DC path

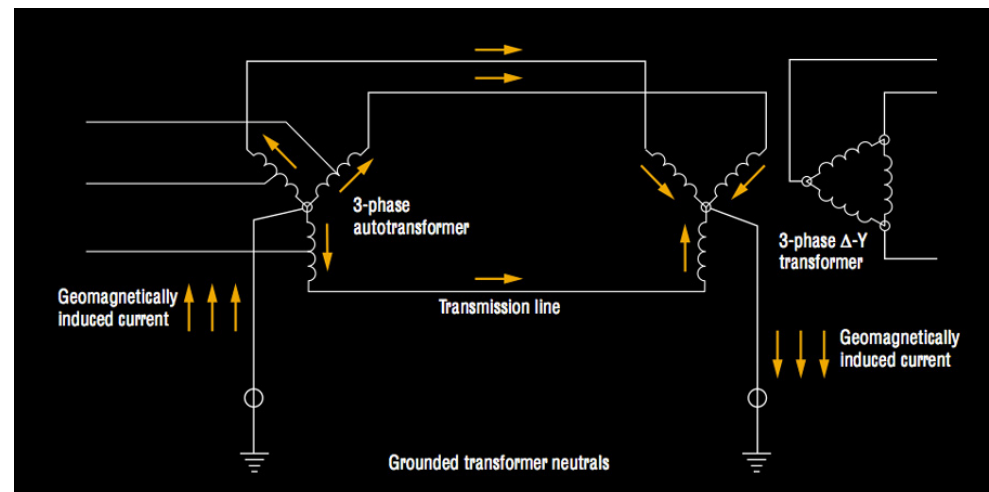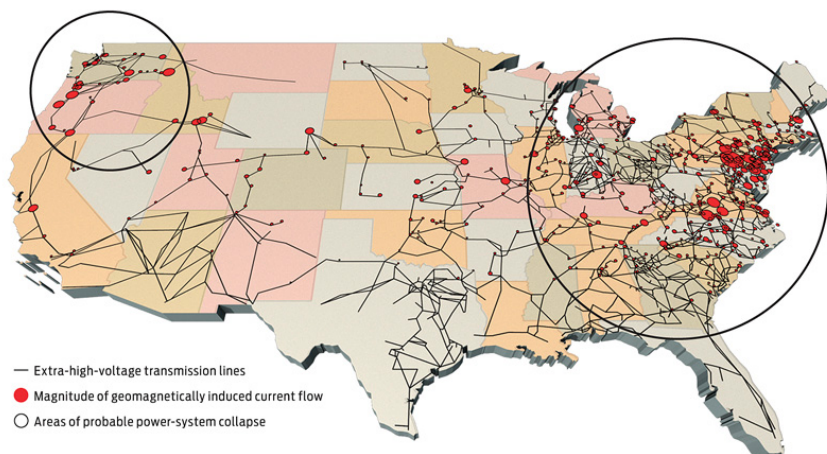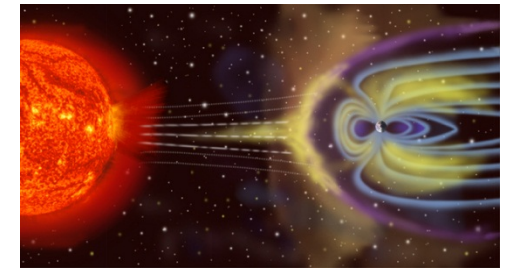

Types of Protection


Mechanical

- **Accumulated Gases**
 - Arcing by-products (Buchholz Relay)

- **Pressure Relays**
 - Arcing causing pressure waves in oil or gas space (Sudden Pressure Relay)


- **Thermal**
 - Caused by overload, overexcitation, harmonics and Geo-magnetically induced currents (GIC)
 - Hot spot temperature
 - Top Oil
 - LTC Overheating

Sealing Transformers from Air/Moisture Intrusion

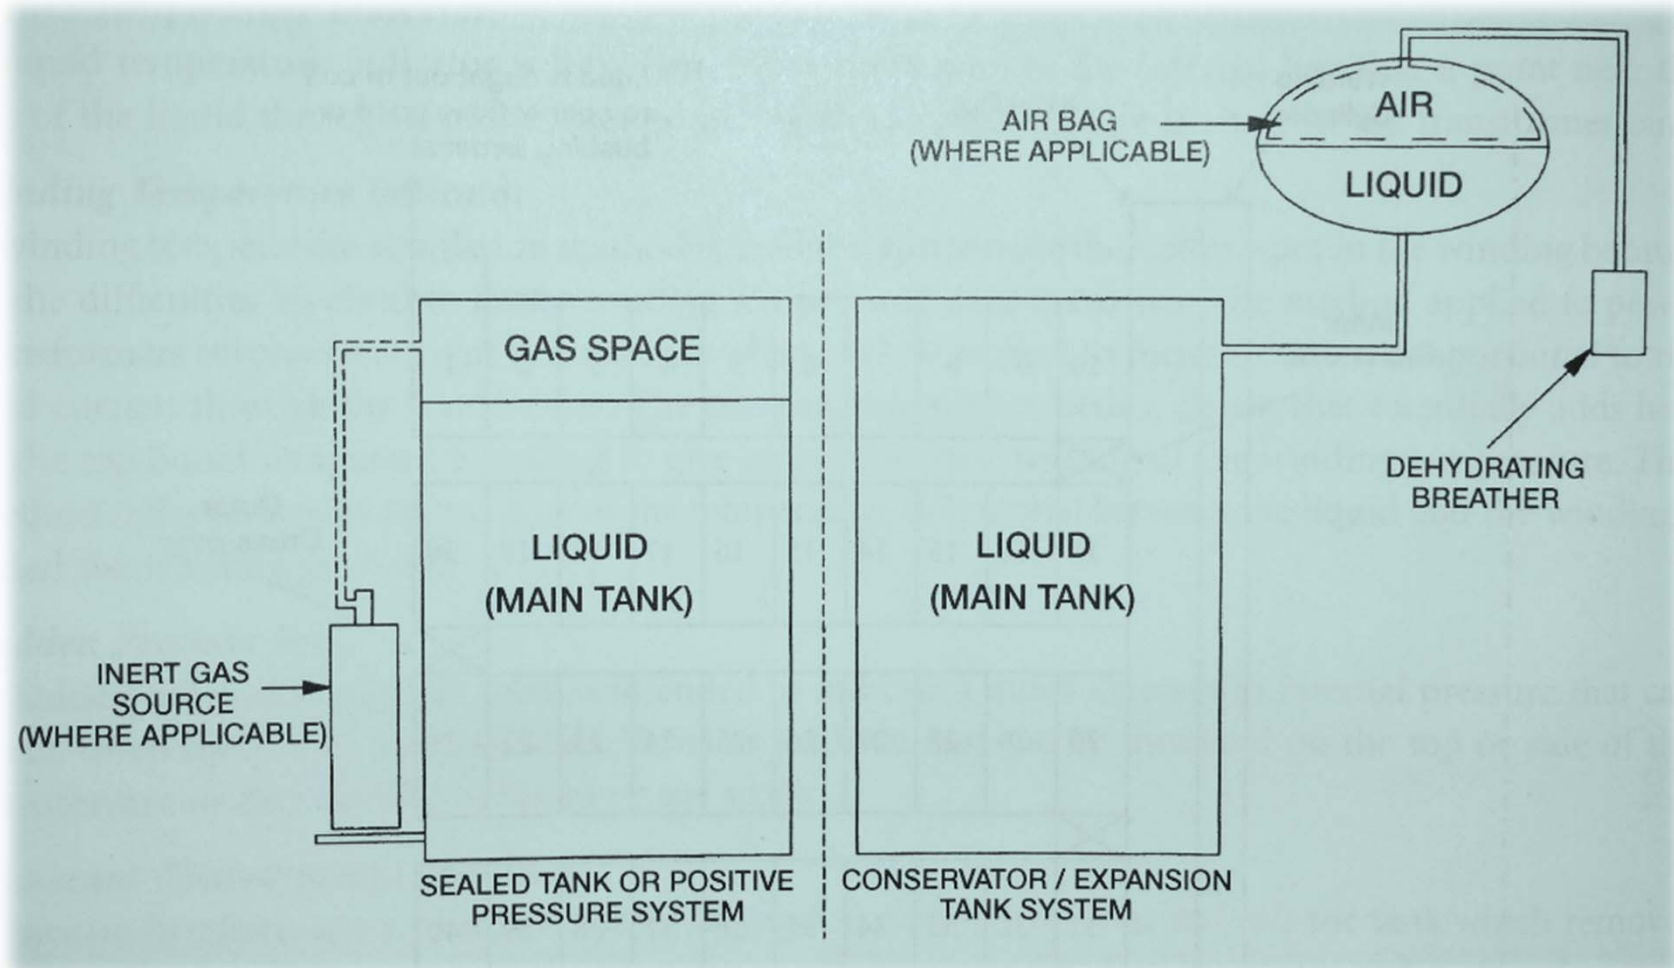



Buchholz Relay

- Gas accumulator relay
- Applicable to conservator tanks equipped
- Operates for small faults by accumulating the gas over a period of time
 - Typically used for alarming only
- Operates for large faults that force the oil through the relay at a high velocity
 - Used to trip
 - Able to detect a small volume of gas and accordingly can detect arcs of low energy
- Detects
 - High-resistance joints
 - High eddy currents between laminations
 - Low- and high-energy arcing
 - Accelerated aging caused by overloading

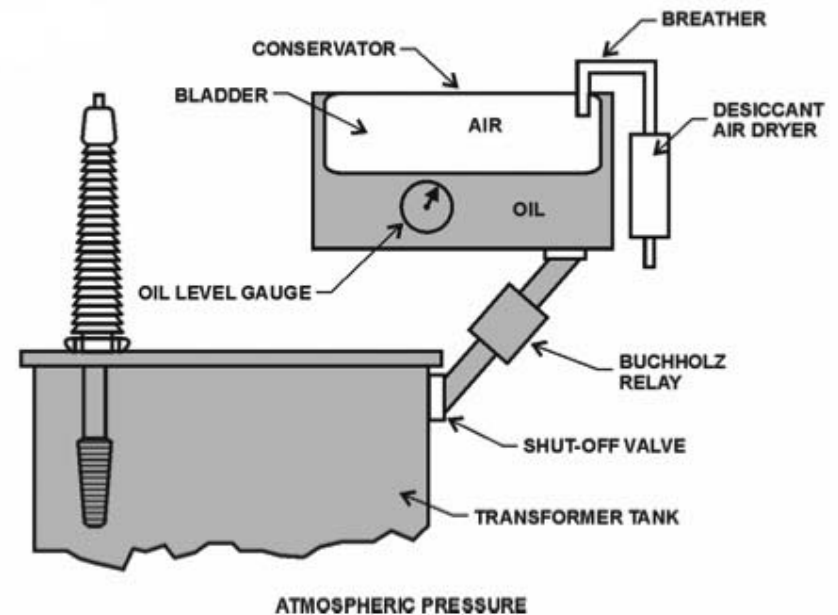


Sudden Pressure Relay

- When high current passes through a shorted turn, a great deal of heat is generated
 - Detect large and small faults
- This heat, along with the accompanying arcing, breaks down the oil into combustible gases
- Gas generation increases pressure within the tank
- A sudden increase in gas pressure can be detected by a sudden-pressure relay located either in the gas space or under the oil
- The sudden-pressure can operate before relays sensing electrical quantities, thus limiting damage to the transformer

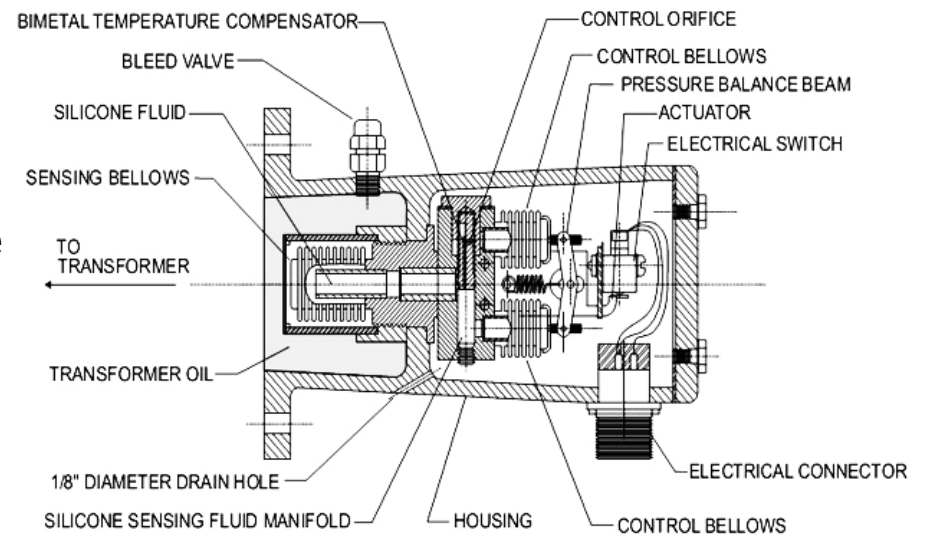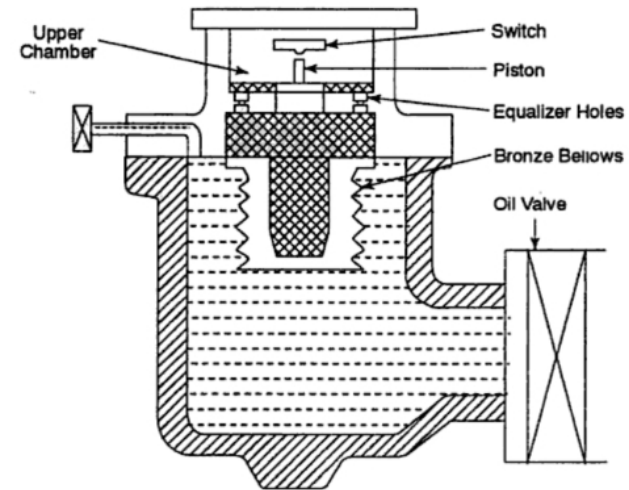


Sudden Pressure Relay

- ❑ Drawback of using sudden-pressure relays is tendency to operate on high-current through-faults
 - The sudden high current experienced from a close-in through-fault causes windings of the transformer to move.
 - This movement causes a pressure wave that is transmitted through the oil
- ❑ Countermeasures:
 - Overcurrent relay supervision
 - Any high-current condition detected by the instantaneous overcurrent relay blocks the sudden-pressure relay
 - This method limits the sudden-pressure relay to low-current incipient fault detection.
 - Place sudden-pressure relays on opposite corners of the transformer tank.
 - Any pressure wave due to through-faults will not be detected by both sudden-pressure relays.
 - The contacts of the sudden-pressure relay are connected in series so both must operate before tripping.

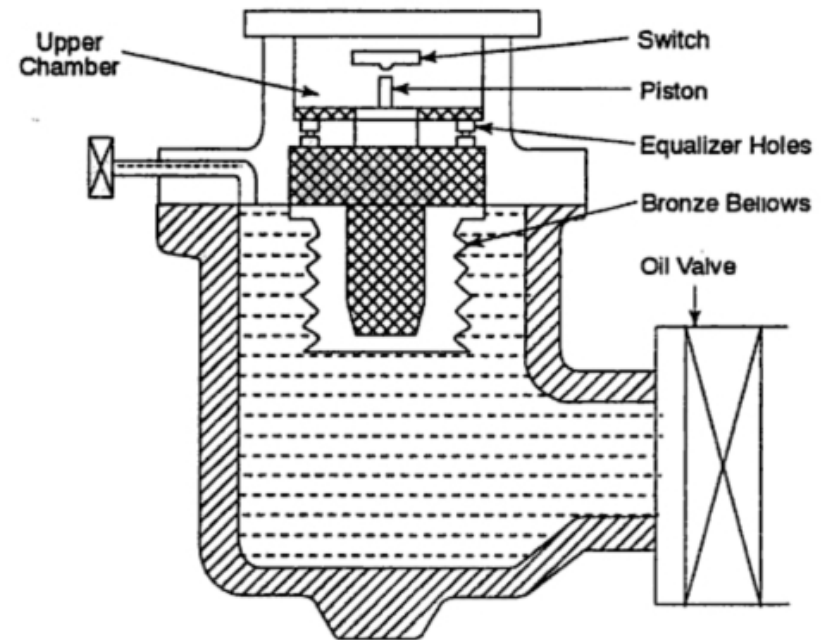

Sudden Pressure Relay Supervision Scheme

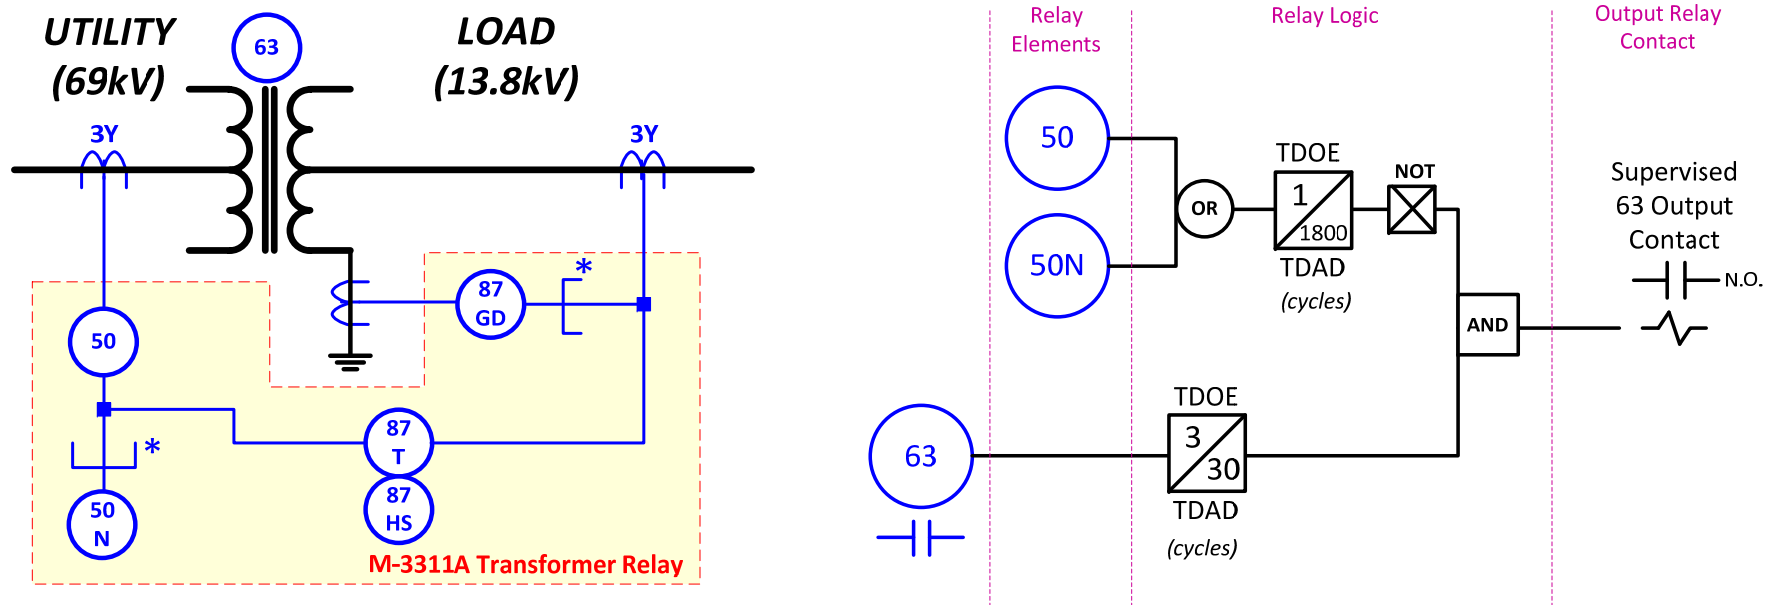

- Phase and Ground Overcurrent supervises SPR (63)
- SPR (63) employs
 - Pickup delay for overcurrent supervision
 - Drop out delay to allow SPR (63) to reset

Causes of Transformer Overheating

- ❑ Transformers may overheat due to the following reasons:
 - High ambient temperatures
 - Failure of cooling system
 - External fault not cleared promptly
 - Overload
 - Abnormal system conditions such as low frequency, high voltage, nonsinusoidal load current, or phase-voltage unbalance

Transformer Overheating




❑ Undesirable results of overheating

- Overheating shortens the life of the transformer insulation in proportion to the duration of the high temperature and in proportion to the degree of the high temperature.
- Severe over temperature may result in an immediate insulation failure (fault)
- Overheating can generate gases that could result in an electrical failure (fault) Severe over temperature may result in the transformer coolant heated above its flash temperature, with a resultant fire (fault and a bang!).


Heating and Relative Transformer Temperatures

- Temperature may be monitored multiple places
 - Hot Spot
 - Top Oil
 - Bottom Oil
 - LTC Tank
 - Delta of the above
- The “hot spot” is, as the name indicates, the hottest spot
- Other temperatures are lower

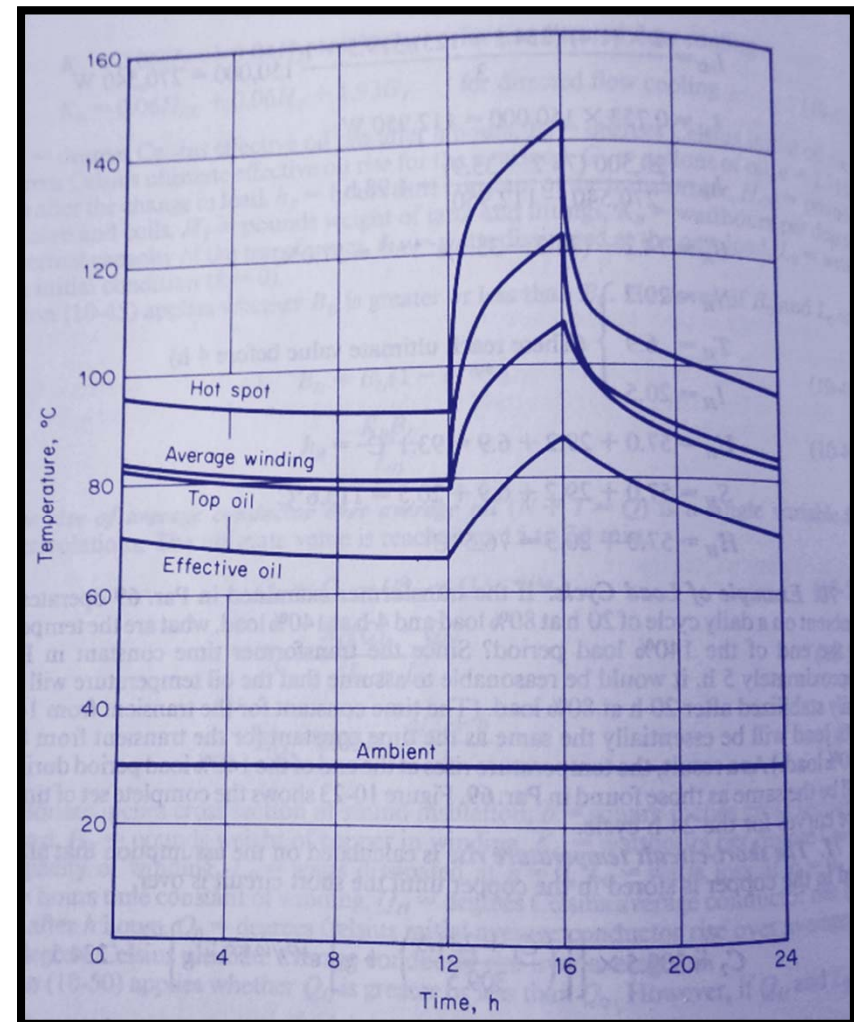

Transformer Temperature Monitoring

Transformer Sensing Inputs (Typical)

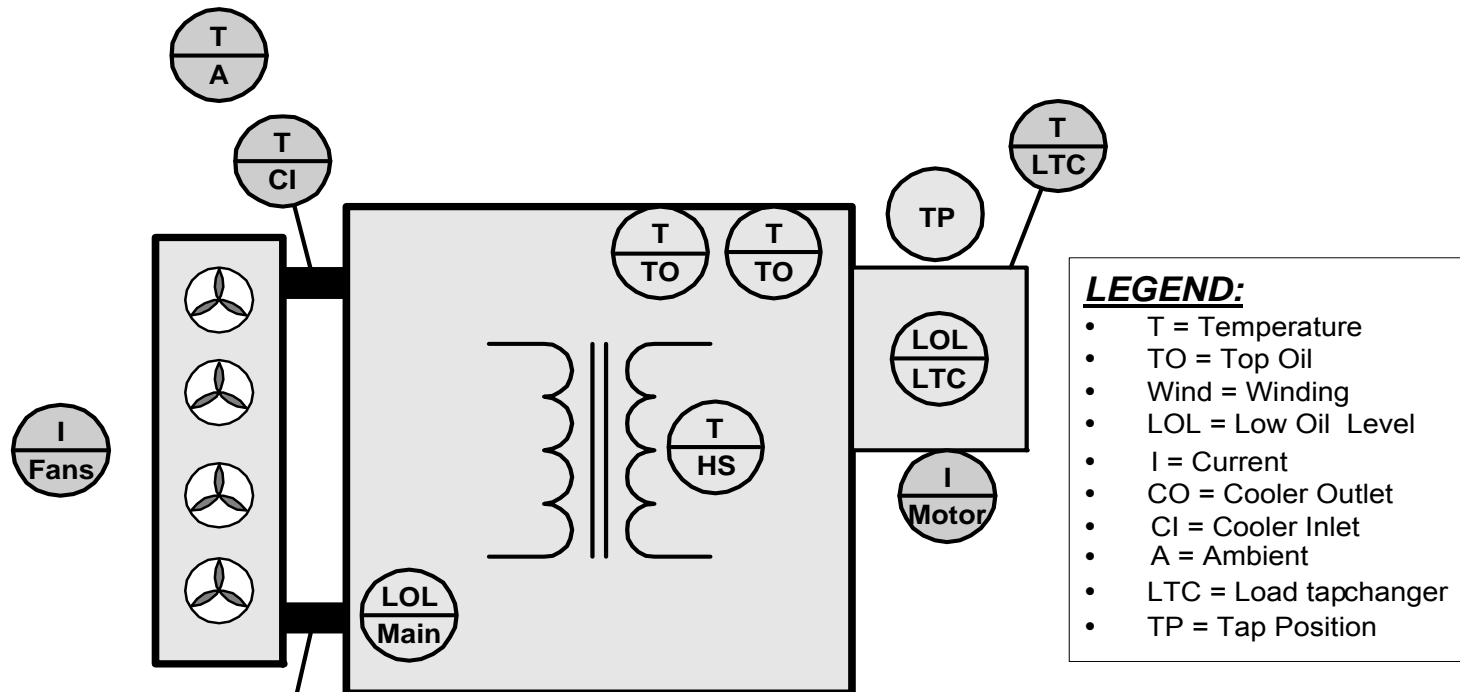


- LEGEND:**
- T = Temperature
 - TO = Top Oil
 - Wind = Winding
 - LOL = Low Oil Level
 - I = Current
 - CO = Cooler Outlet
 - CI = Cooler Inlet
 - A = Ambient
 - LTC = Load tapchanger
 - TP = Tap Position

Electrical Quantities

- 3 Phase Currents
- 1 Neutral Current
- 3 Phase Voltages


Hot Spot Detection

- Fiberoptic sensors
 - Use Gallium Arsenic (GaAs) based spectrophotometric module
 - Measures the spectrum a temperature-dependent GaAs crystal affixed on optical fiber
- Typical on newly constructed transformers
- Difficult to retrofit
- More exact than IEEE calculation approximations
 - “Aging Factor” = multiples of 1 hour of normal temperature use

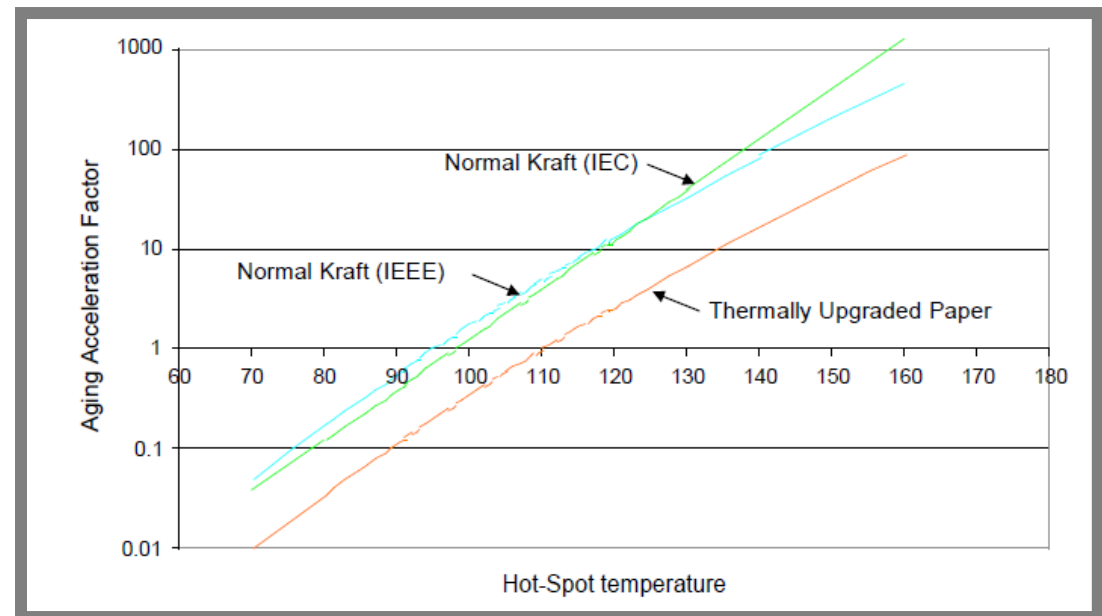



“Transformer Winding Hot Spot Temperature Determination,” 2006, Qualitrol

Transformer Electrical Protection Issues


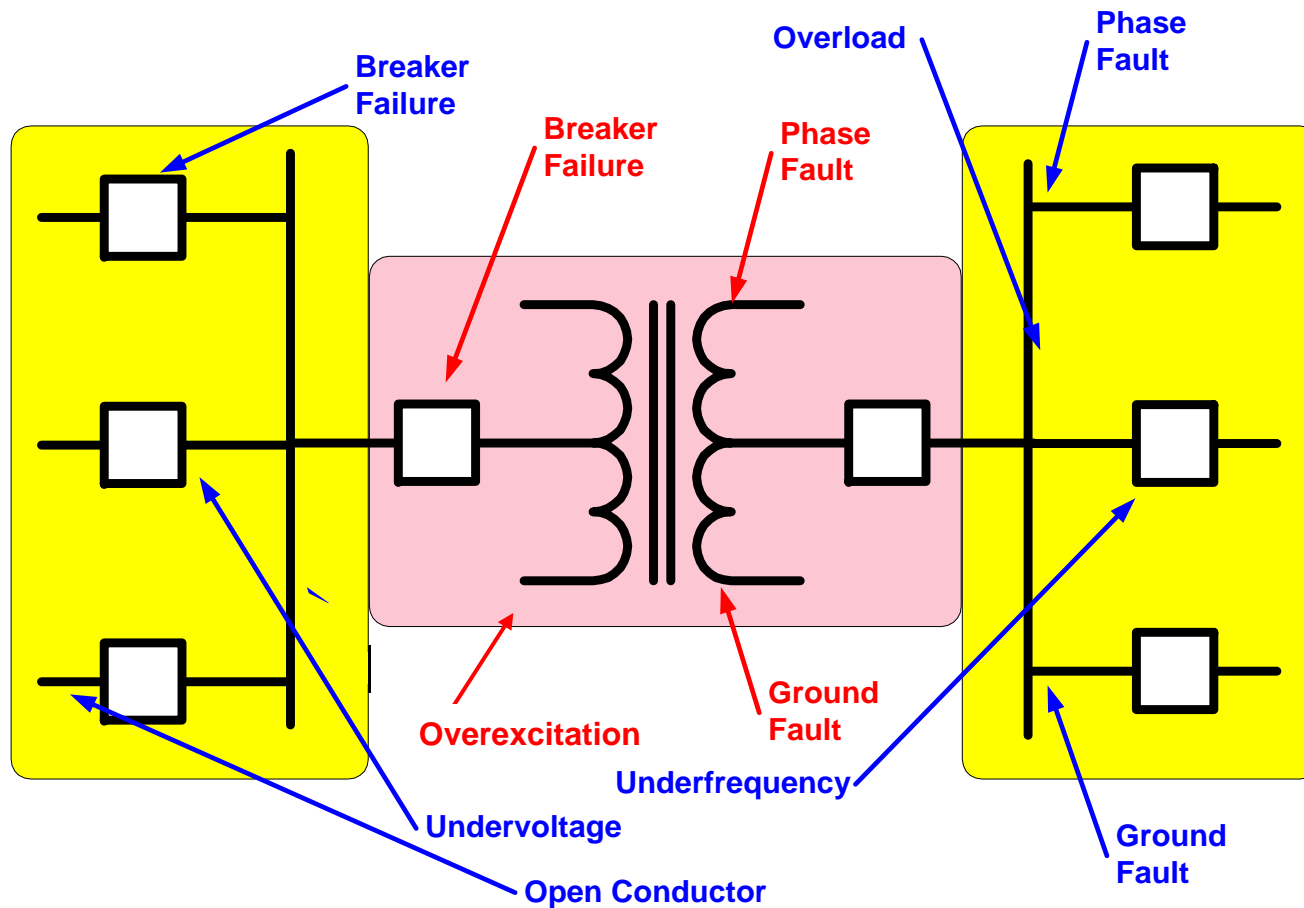


In and Out of Zone

Complex Applications

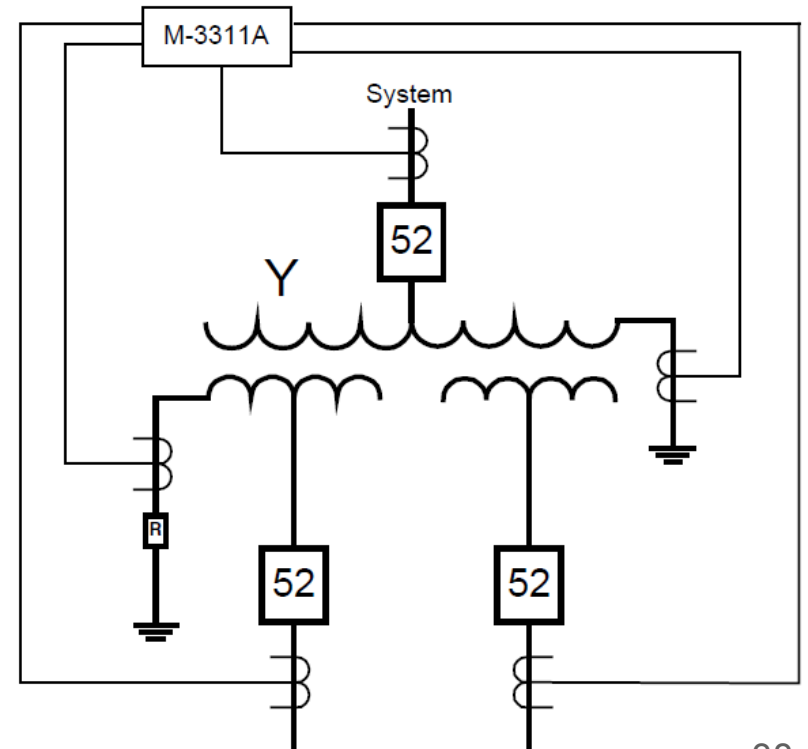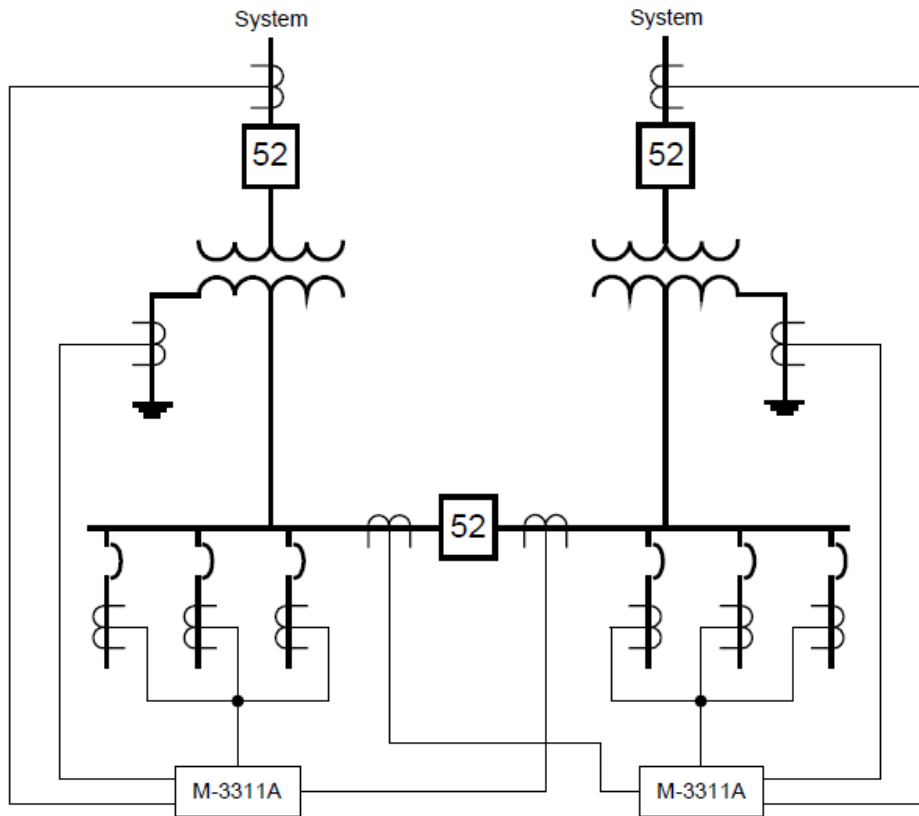


Complex Applications

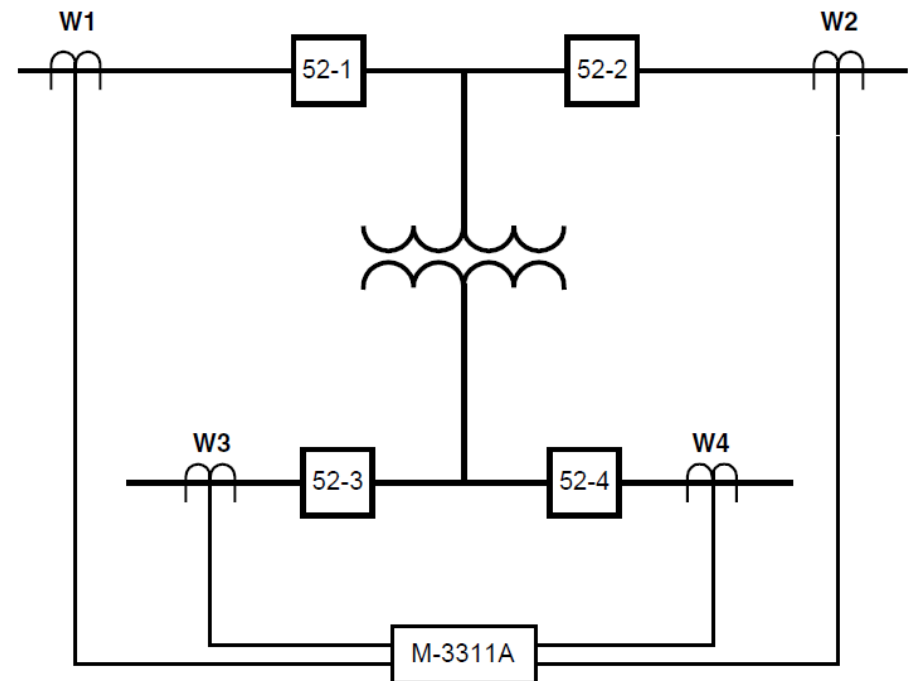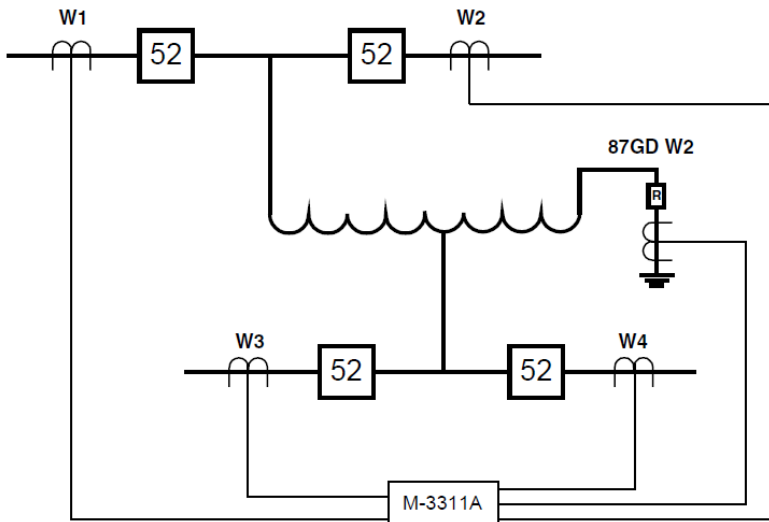


M-3311A Typical Connection Diagram
Two Winding Model

- This function is available as a standard protective function.
- This function is available in the Optional Voltage Protection Package

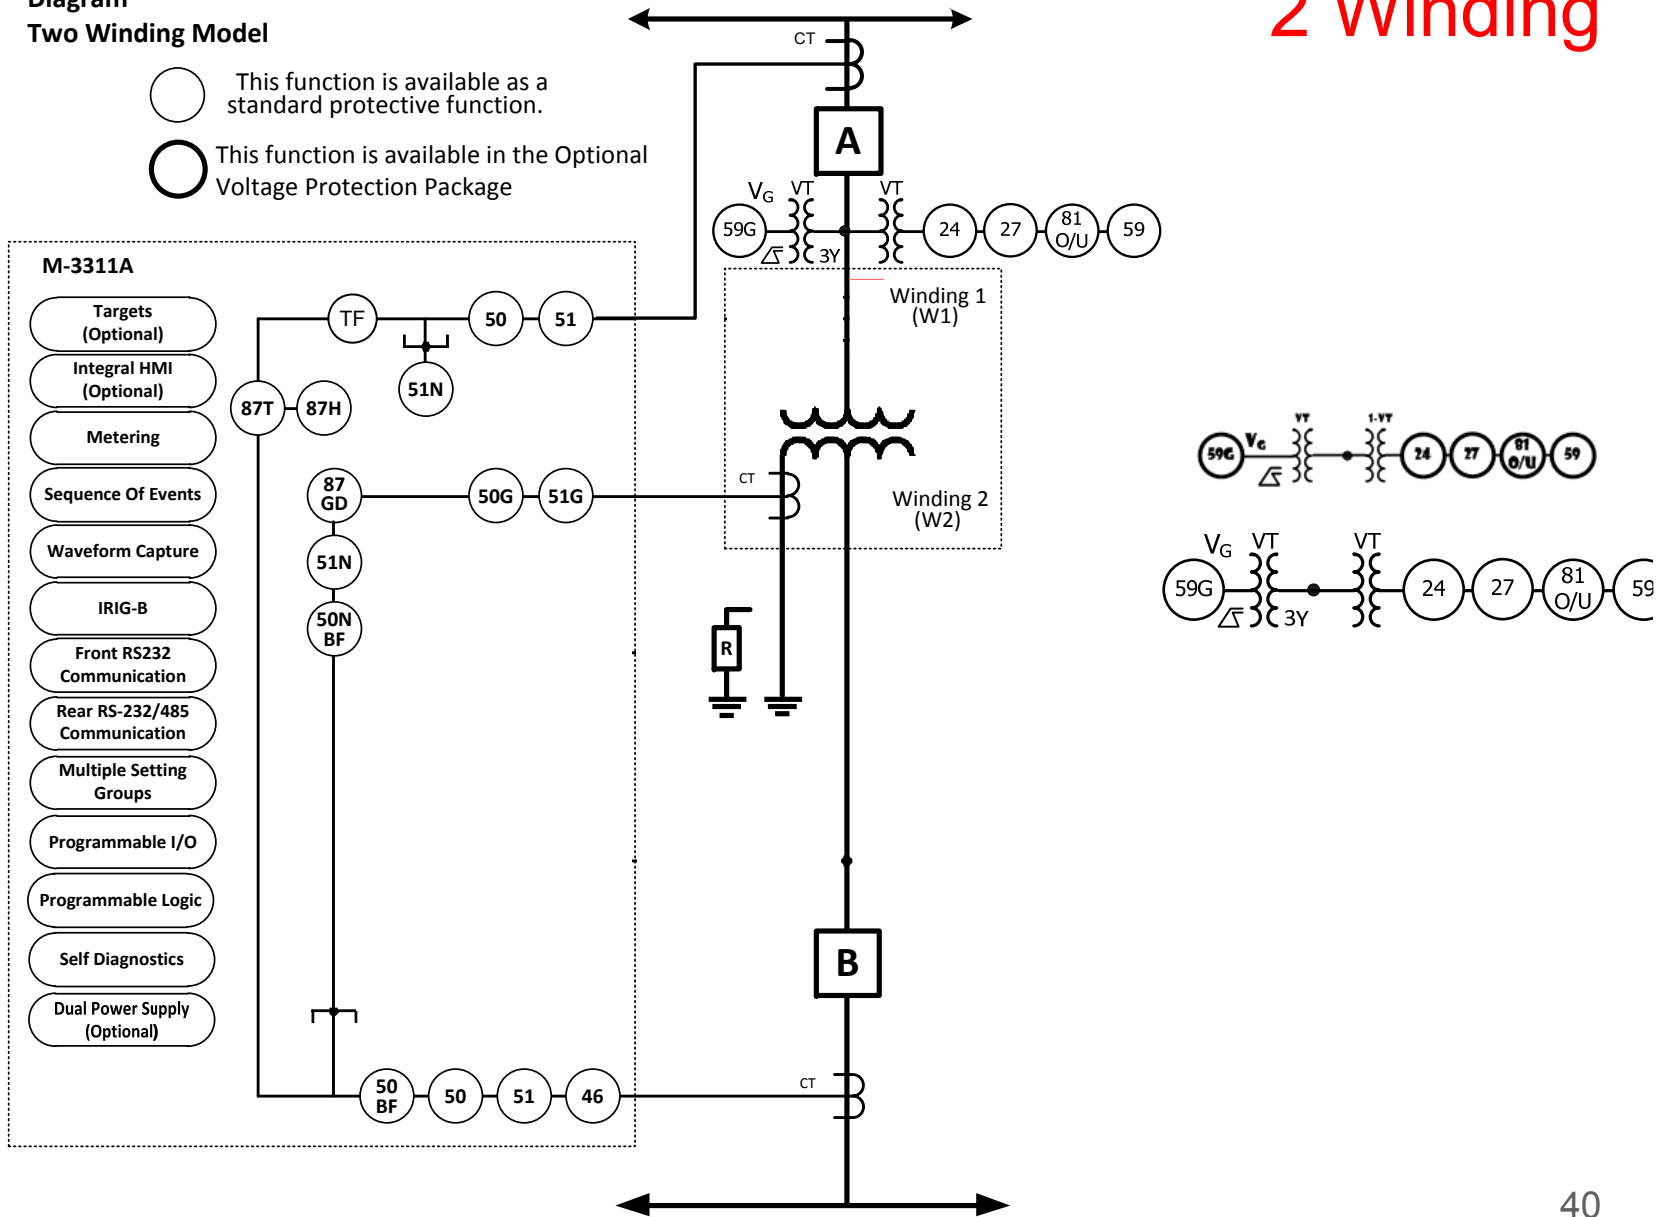

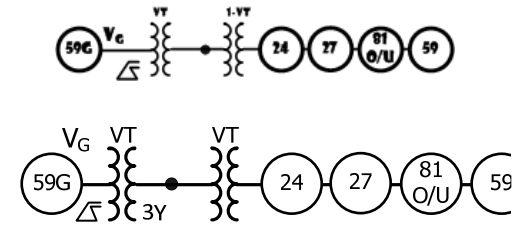


2 Winding




3 Winding

M-3311A Typical Connection Diagram Three Winding Model

-  This function is available as a standard protective function.
-  This function is available in the Optional Voltage Protection Packages.

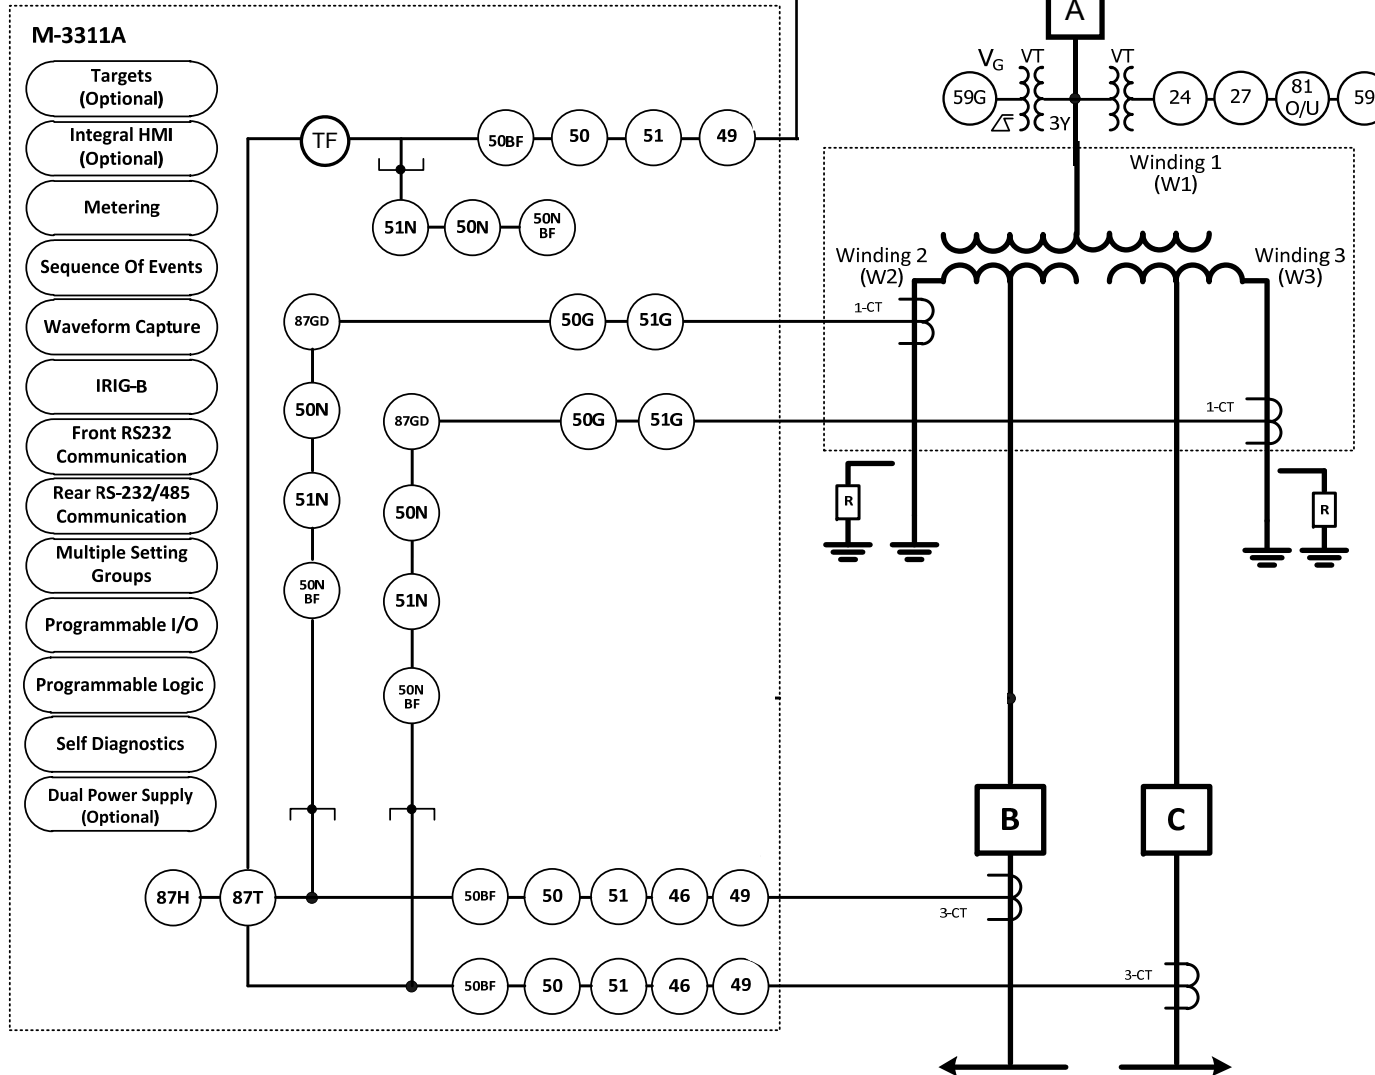

4 Winding w/Current Summing

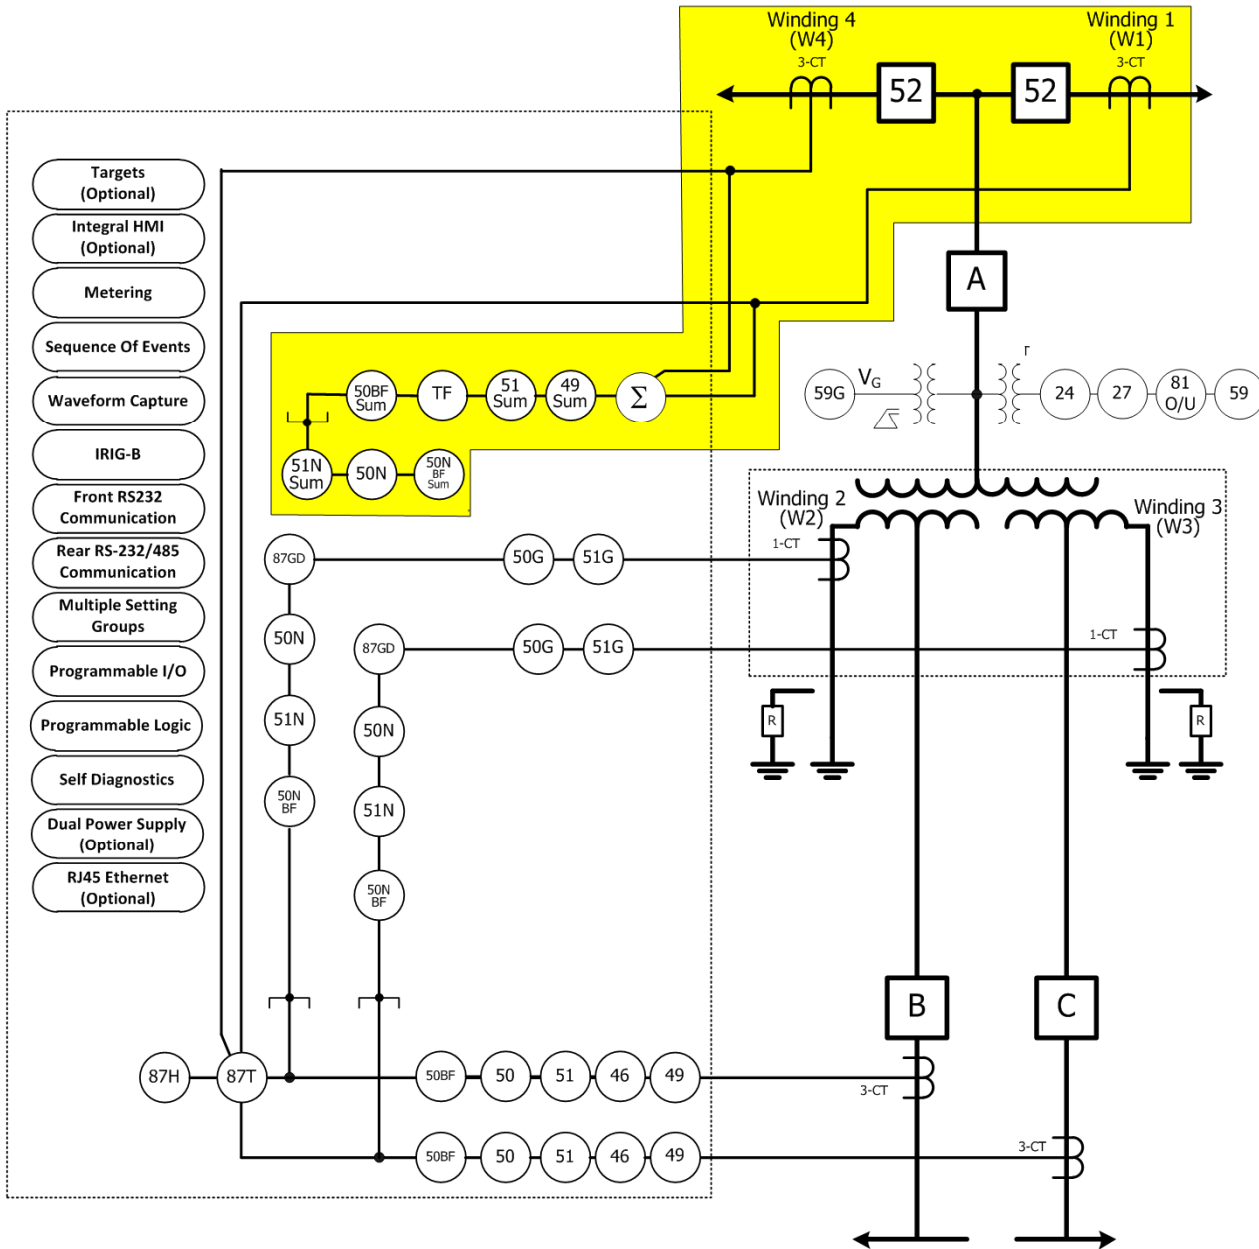

Desirable Sensing Possibilities

M-3311A Configuration Options		
Windings	Ground Inputs	Voltage Inputs
Two	One	Zero
		Two
		Four
Three	Two	Zero
		Two
		Four
Four	Three	Zero
		Two

- Many ground Inputs available for 87GD (REF), 51G
- Many voltage inputs available for 24, 59, 59N, 27, 81-0, 81-U
- Current Summing available on two sets of current inputs
 - Useful for thru-fault on dual high side CB applications

Types of Protection

Electrical

- **Fuses**
 - Small transformers (typ. <10 MVA)
 - Short circuit protection only

- **Overcurrent protection**
 - High side
 - Through fault protection
 - Differential back-up protection for high side faults
 - Low side
 - System back up protection
 - Unbalanced load protection

Transformer Protection Functions

Internal Faults:

- **87T** Phase Differential with Restraints
- **87H** Unrestrained Phase Differential
- **87GD** Three Ground Differential elements (Restricted Earth Fault)
- **64G** Tank Ground Overcurrent

Through Faults:

- **50/51** Phase Overcurrent
- **50G/51G** Ground Overcurrent
- **50N/51N** Instantaneous Residual Overcurrent
- **46** Negative Sequence Overcurrent

Transformer Protection Functions

Abnormal Operating Conditions:


- **27** Undervoltage
- **24** Overexcitation (V/Hz)
- **49** Thermal Overload
- **81U** Underfrequency
- **50BF** Breaker Failure

Asset Management Functions:

- **TF** Through Fault Monitoring
- **BM** Breaker Monitoring
- **TCM** Trip Circuit Monitoring


High Side Overcurrent

- Back up to differential, sudden pressure
- Coordinated with line protection off the bus
 - Do not want to trip for low-side external faults

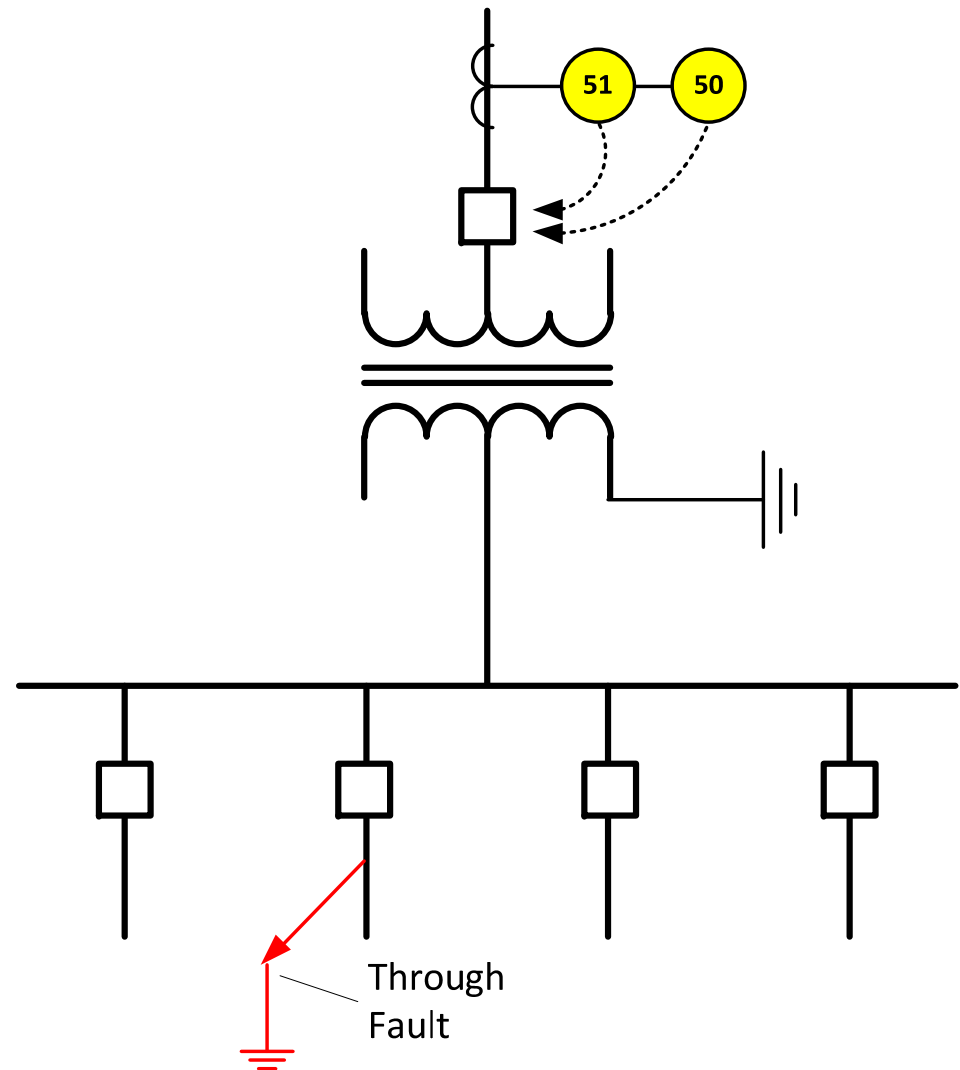

High Side Overcurrent for Internal Fault

- Set to pick up at a value higher than the maximum asymmetrical through-fault current.
 - This is usually the fault current through the transformer for a low-side three-phase short circuit.
- Instantaneous units that are subject to transient overreach are set for pickup in the range of 125% to 200

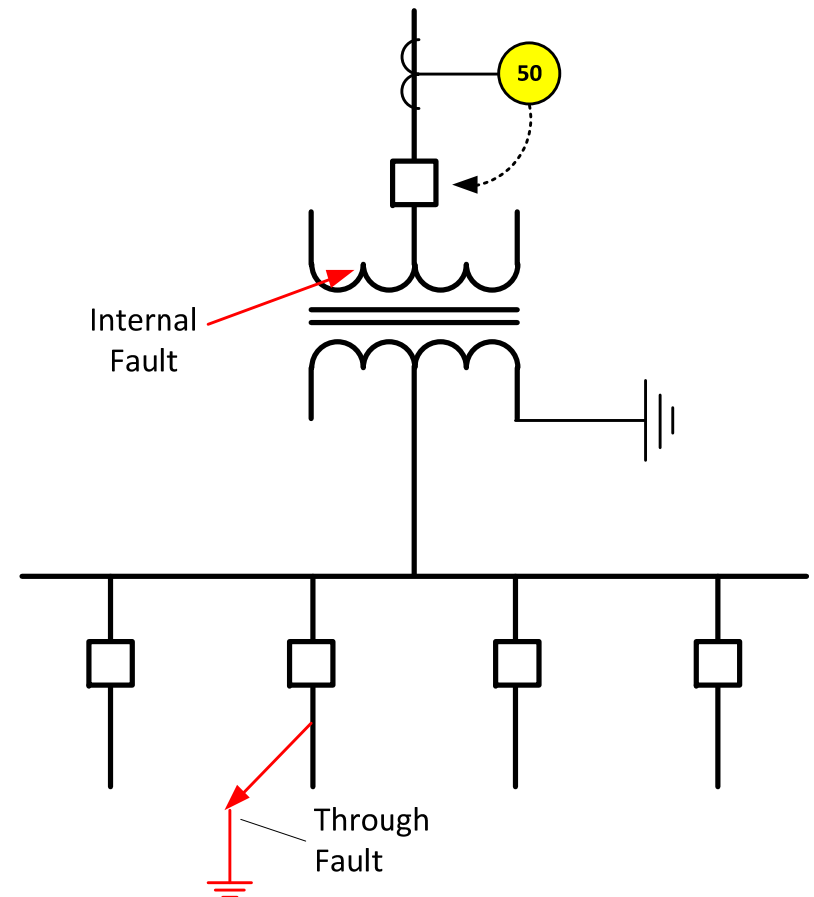

51 Function Settings

The image displays two windows from a relay configuration application. The top window, titled "Setup System", has tabs for "System", "Output Settings", and "Input Settings". Under the "Settings" section, it includes fields for "Nominal Voltage" (120 V), "Phase Rotation" (ACB), "Demand Timing Method" (15 Minutes), "V.T. Config" (VAB), and "Current Summing" options. The "Current Summing 1" checkbox is checked, and "W4" is selected. Below this is a dropdown menu for "Enable/Disable Windings for 87 Function" set to "Enable All Windings".

The bottom window, titled "51: Inverse Time Phase Overcurrent", has tabs for "#1", "#2", "#3", and "#4". It shows "Pickup" (5.00 A) and "Time Dial" (1.0) settings. The "Current Selection" is set to "Sum1". Under "Inverse Time Curves", "IEEE Moderately Inverse" is selected. The "Outputs" section has checkboxes for 1 through 16, with checkbox 1 checked. The "Blocking Inputs" section has checkboxes for 1 through 18. "Save" and "Cancel" buttons are at the bottom.

Two red arrows originate from the "Current Summing 1" checkbox in the "Setup System" window and point to the "Sum1" radio button in the "51: Inverse Time Phase Overcurrent" window, indicating the relationship between the two settings.

50 Function Settings

50: Instantaneous Phase Overcurrent

#1 | #2 | #3 | #4 | #5 | #6 | #7 | #8

Pickup: 1.0 100.0 (A)

Time Delay: 1 8160 (Cycles)

Current Selection: Sum1 Sum2 W1 W2 W3 W4

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16


Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18


Low Side Overcurrent

- Provides protection against uncleared faults downstream of the transformer
- May consist of phase and ground elements
- Coordinated with downline protection off the bus

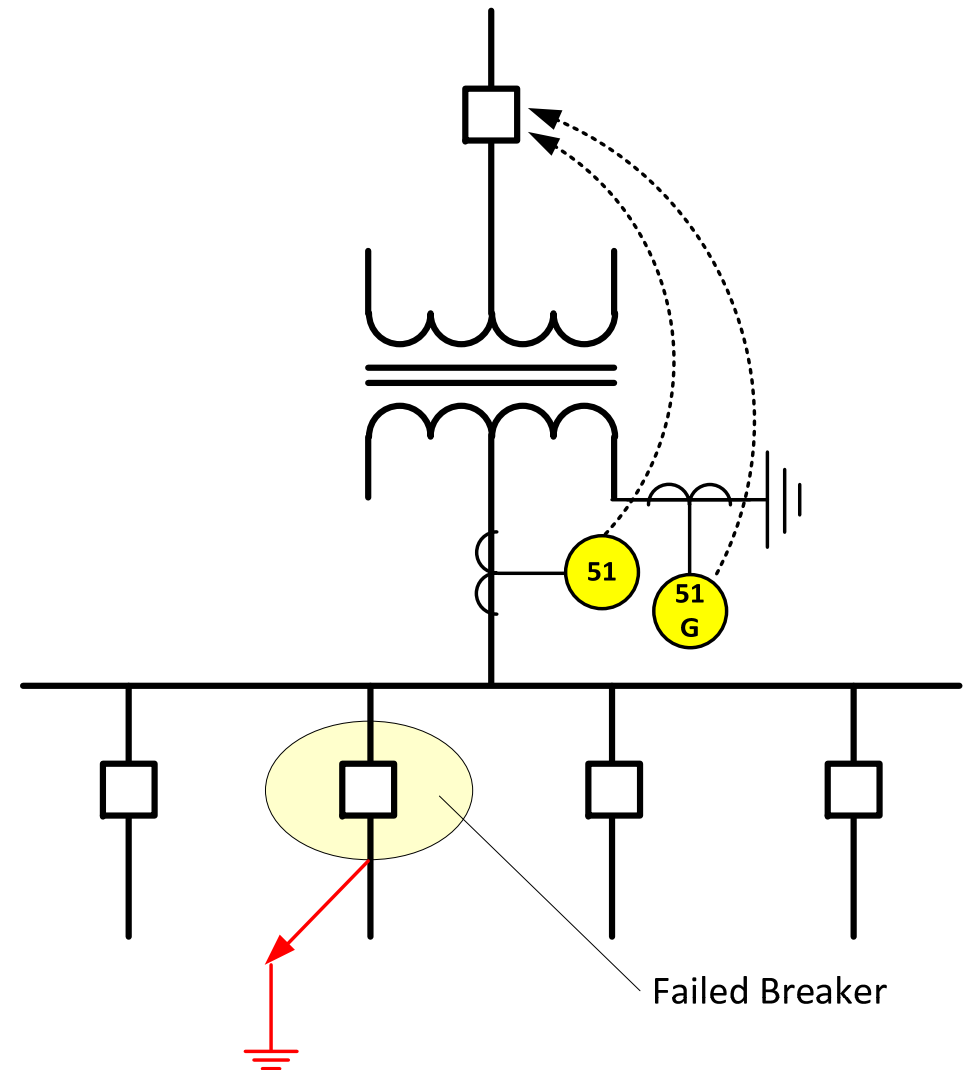



Negative Sequence Overcurrent

- Negative sequence overcurrent provides protection against
 - Unbalanced loads
 - Open conductors
 - Phase-to-phase faults
 - Ground faults
 - Does not protect against 3-phase faults

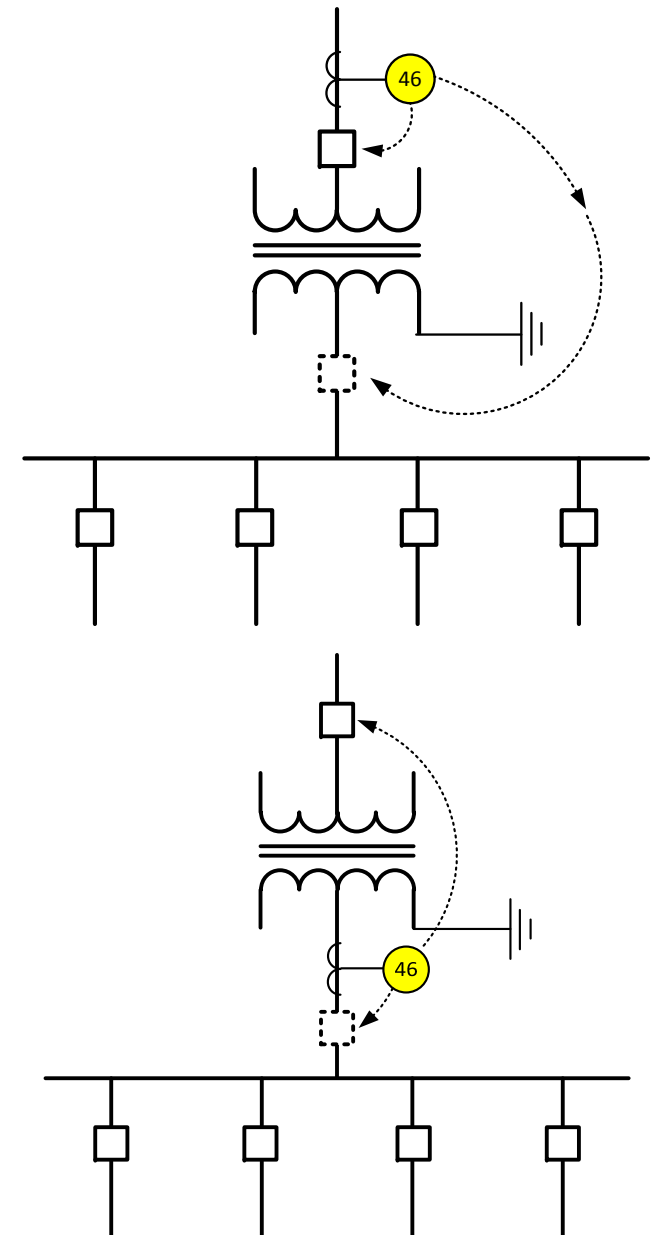


Negative Sequence Overcurrent

- Can be connected in the primary supply to protect for secondary phase-to-ground or phase-to-phase faults
- Helpful on delta-wye grounded transformers where only 58% of the secondary p.u. phase-to-ground fault current appears in any one primary phase conductor

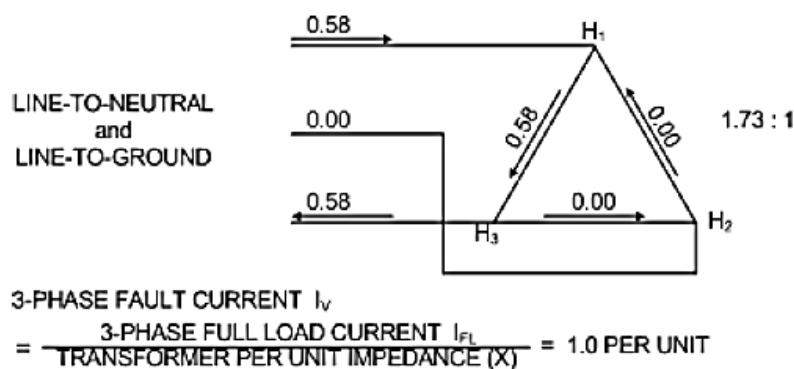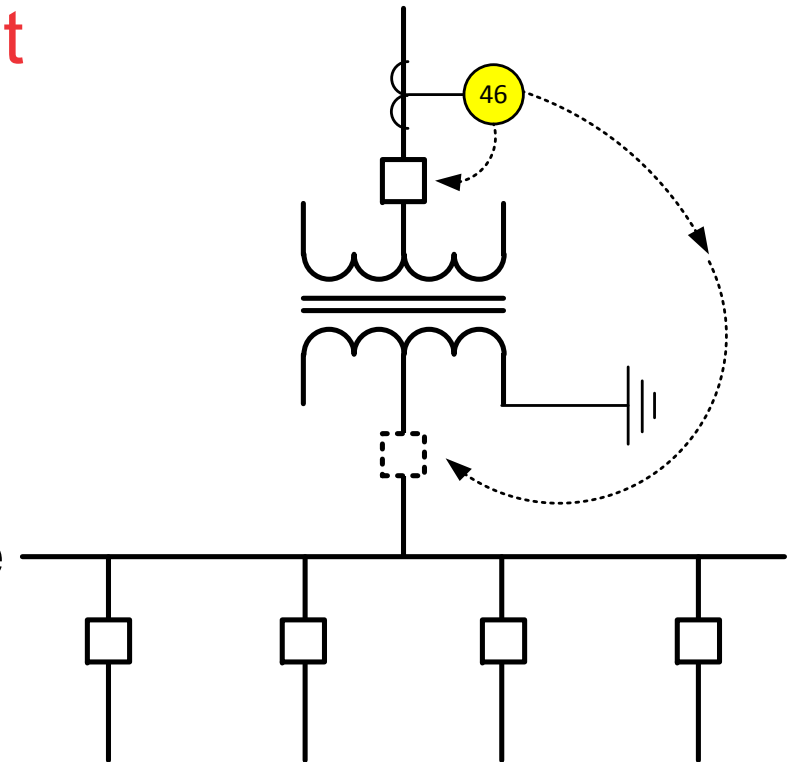


Negative Sequence Overcurrent

- Provides better protection than phase overcurrent relays for internal transformer faults
- The relay must also be set higher than the negative-sequence current due to unbalanced loads
- The relay should be set to coordinate with the low-side phase and ground relays for phase-to-ground and phase-to-phase faults

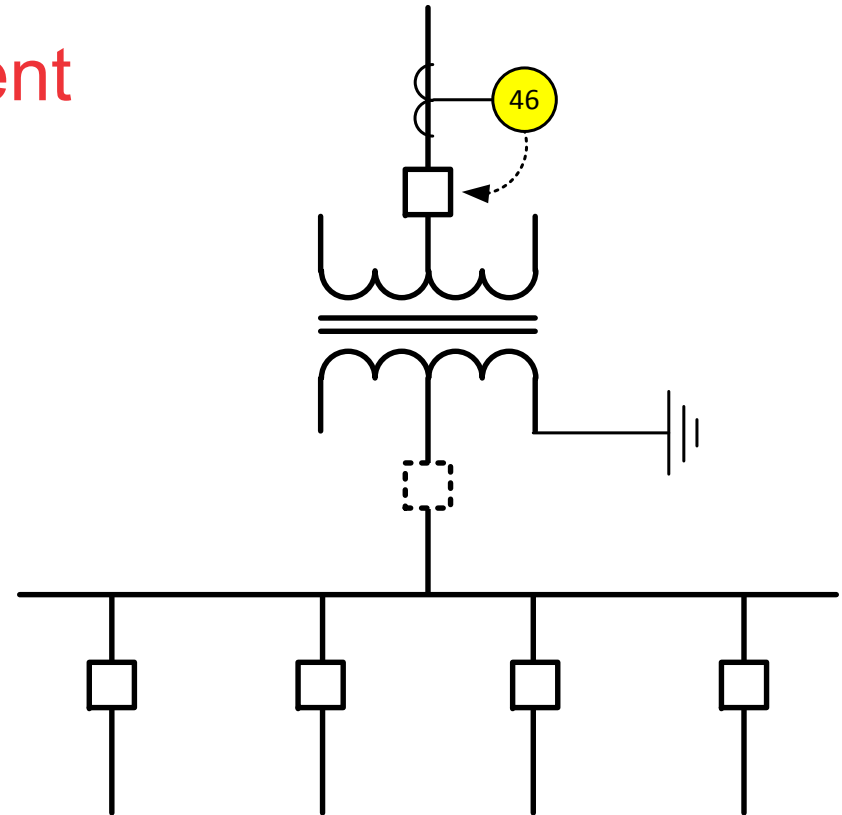

Negative Sequence Overcurrent

- Negative sequence relays can be set below load current levels and be more sensitively than phase overcurrent relays for phase-to-phase fault detection
- In many applications, phase overcurrent relay pickup settings can be higher allowing more feeder load capability.

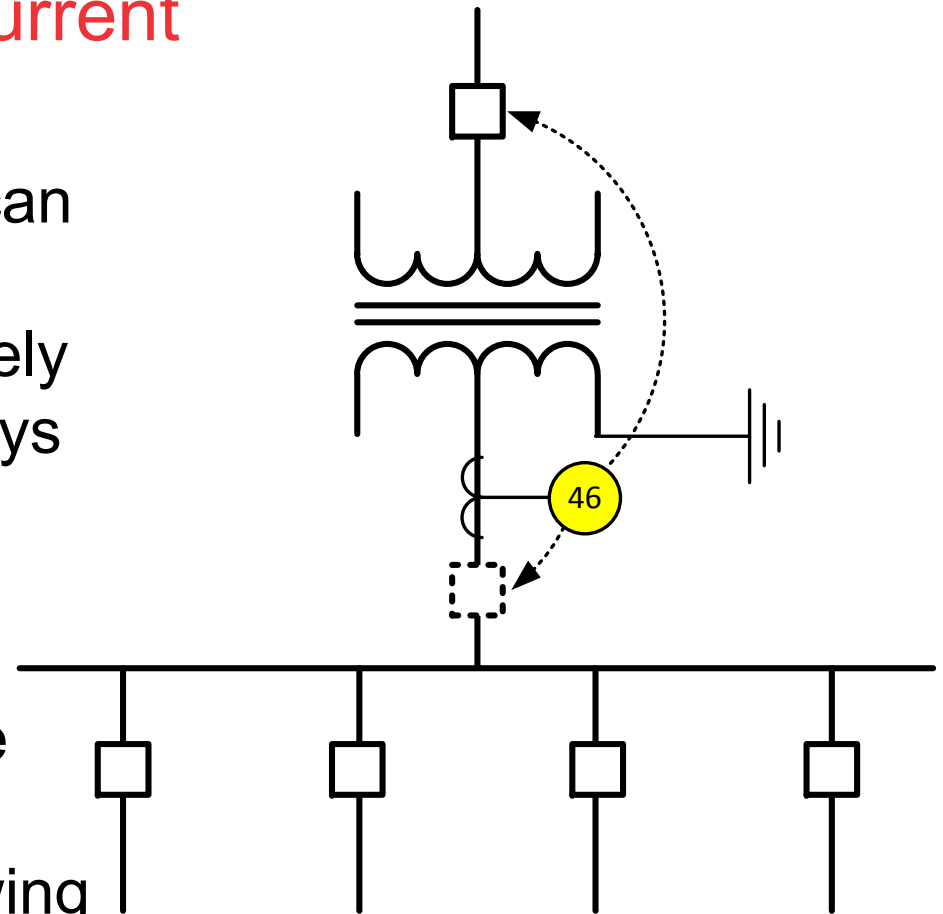

46 Function Settings

46: Negative Sequence Overcurrent ✕

Winding 2 | Winding 3 | Winding 4

Pickup: 0.10 20.00 (A)

Time Delay: 1 8160 (Cycles)

Definite Time

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16

Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18

Pickup: 0.50 5.00 (A)

Time Dial: 0.5 11.0

Inverse Time

Inverse Time Curves

<input checked="" type="radio"/> BECO Definite Time	<input type="radio"/> BECO Inverse	<input type="radio"/> BECO Very Inverse	<input type="radio"/> BECO Extremely Inverse
<input type="radio"/> IEC Inverse	<input type="radio"/> IEC Very Inverse	<input type="radio"/> IEC Extremely Inverse	<input type="radio"/> IEC Long Time Inverse
<input type="radio"/> IEEE Moderately Inverse	<input type="radio"/> IEEE Very Inverse	<input type="radio"/> IEEE Extremely Inverse	

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16


Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18



Through Fault

- Provides protection against cumulative through fault damage
- Typically alarm function

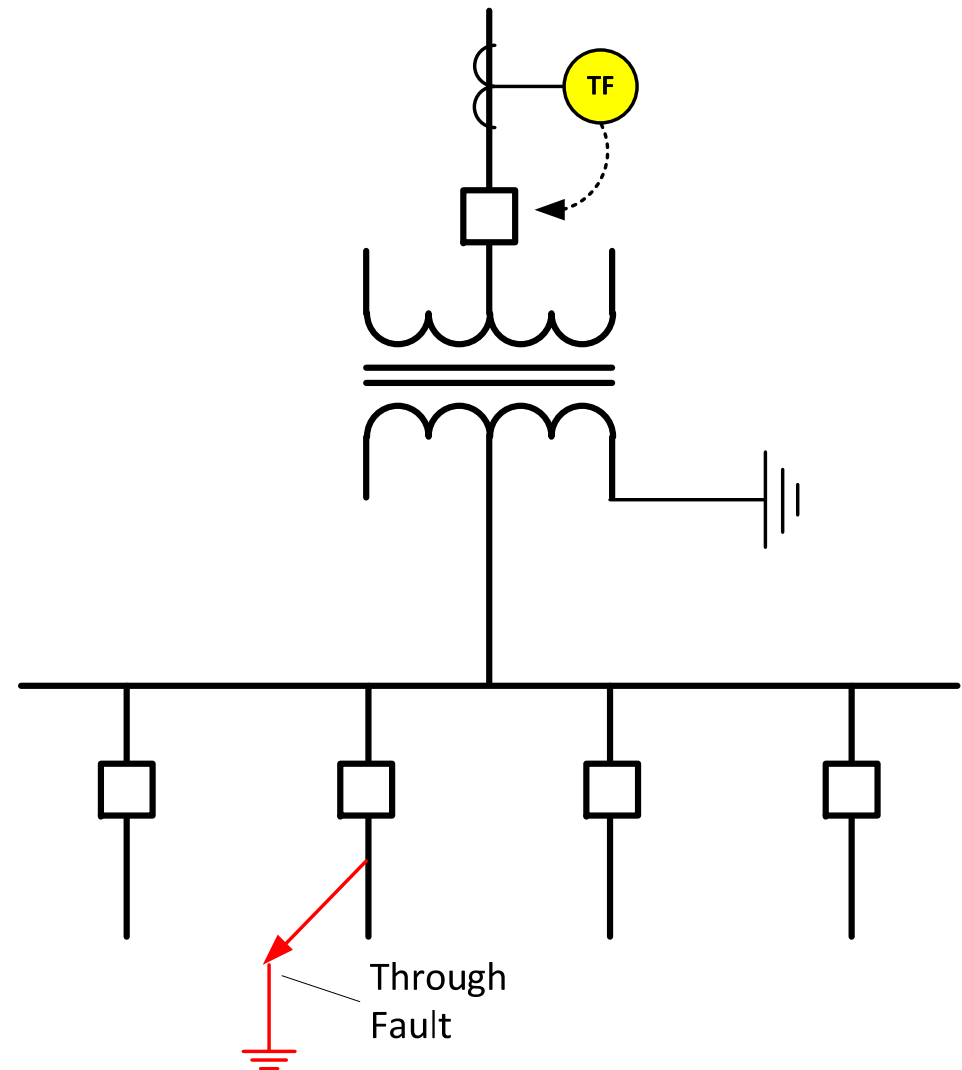

Through Fault

- A transformer is like a motor that does not spin
- There are still forces acting in it
- That is why we care about limiting through-faults

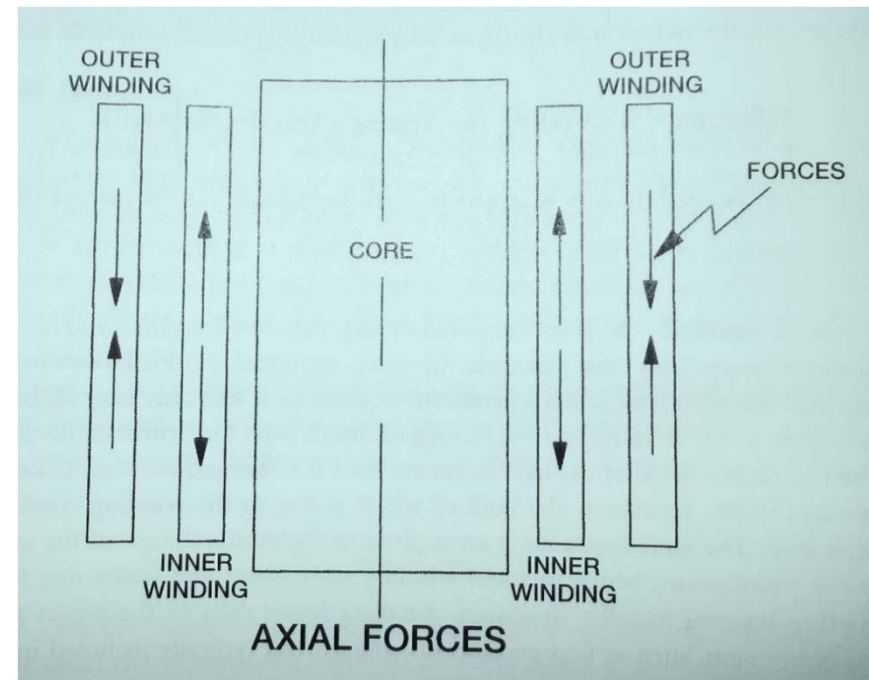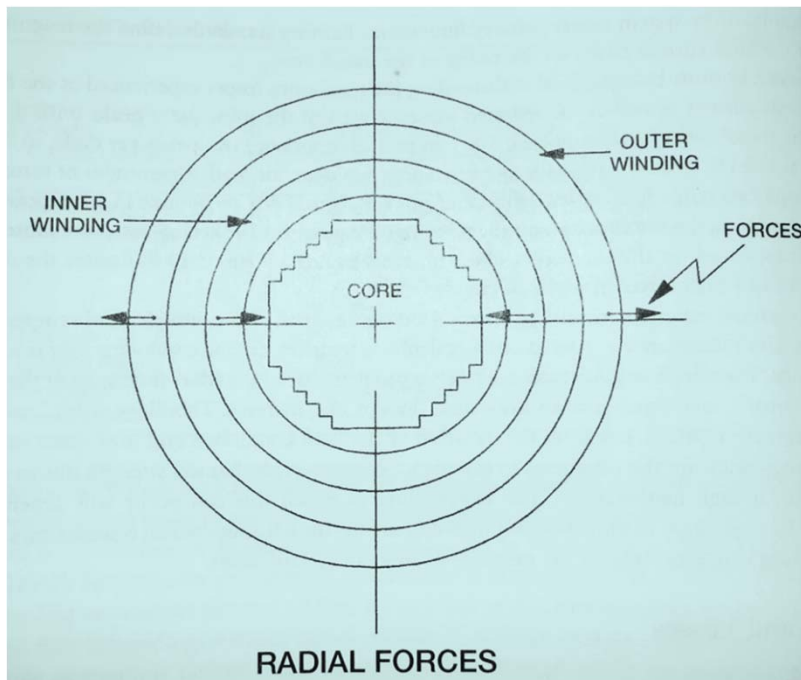


Through Fault Monitoring


- Protection against heavy prolonged through faults
- Transformer Category
 - IEEE Std. C57.109-1985 Curves

Category	Minimum nameplate (kVA)	
	Single-Phase	Three-Phase
I	5-500	15-500
II	501-1667	501-5000
III	1668-10,000	5001-30,000
IV	Above 10,000	Above 30,000

Through Fault Damage Mechanisms


- Thermal Limits for prolonged through faults typically 1-5X rated
 - Time limit of many seconds
- Mechanical Limits for shorter duration through faults typically greater than 5X rated
 - Time limit of few seconds
- NOTE: Occurrence limits on each Transformer Class Graph

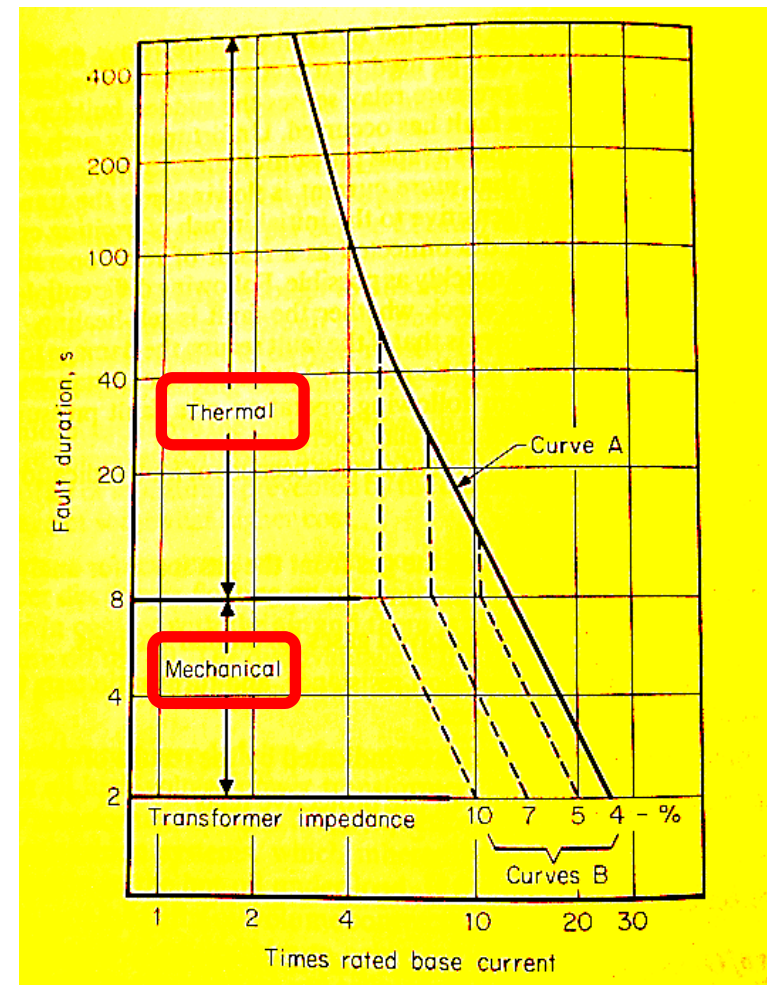

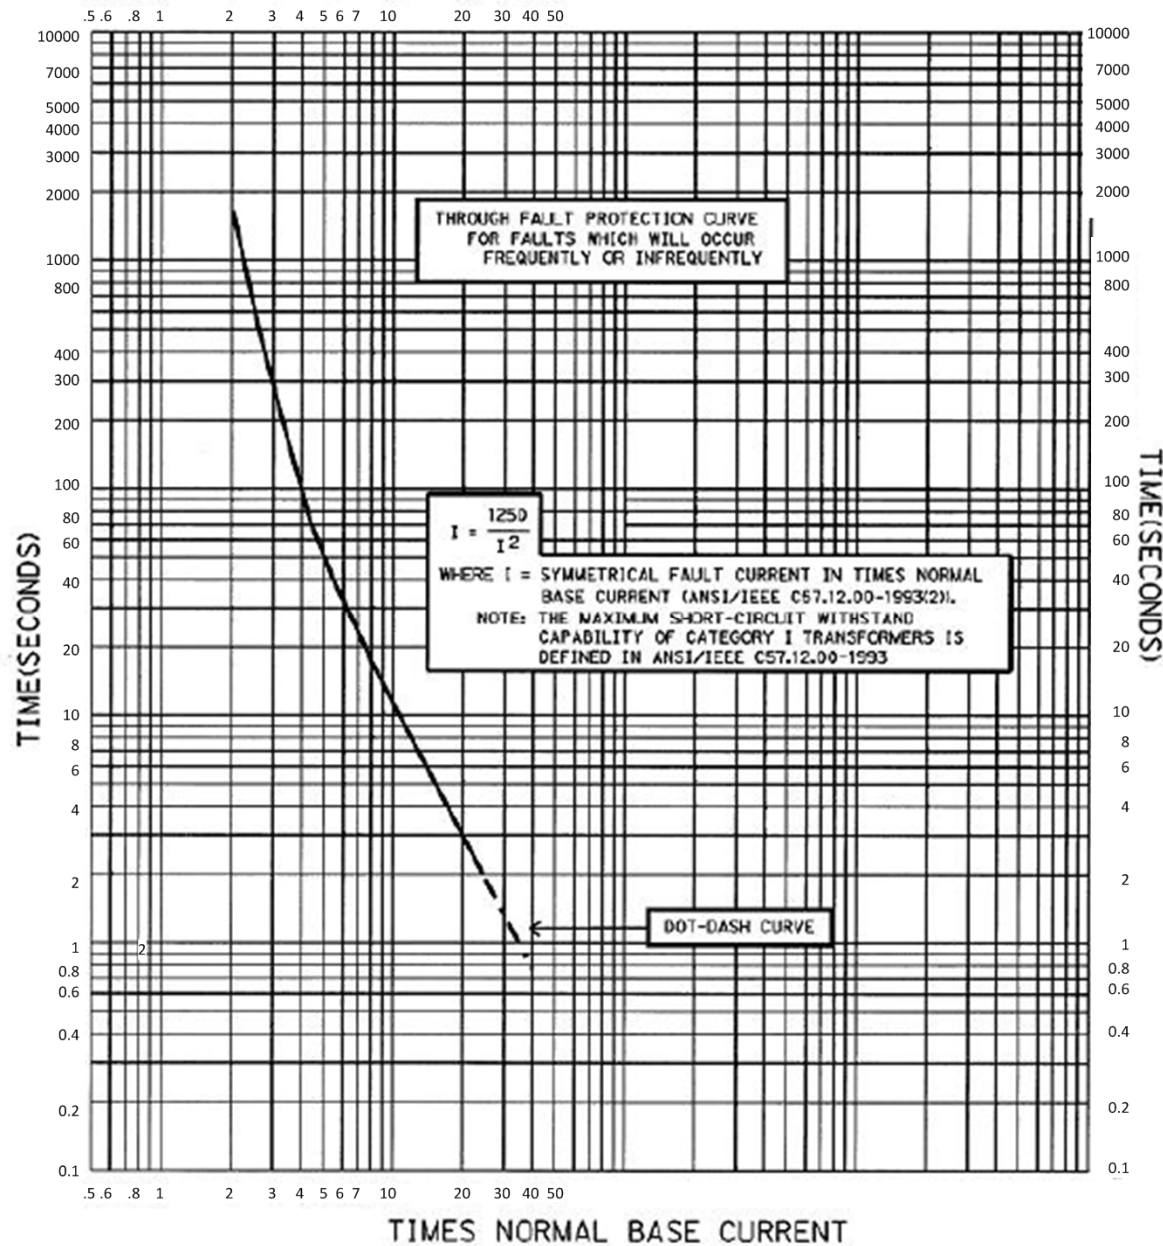

Through Fault Category 1 (15 kVA – 500 kVA)


From IEEE C37.91

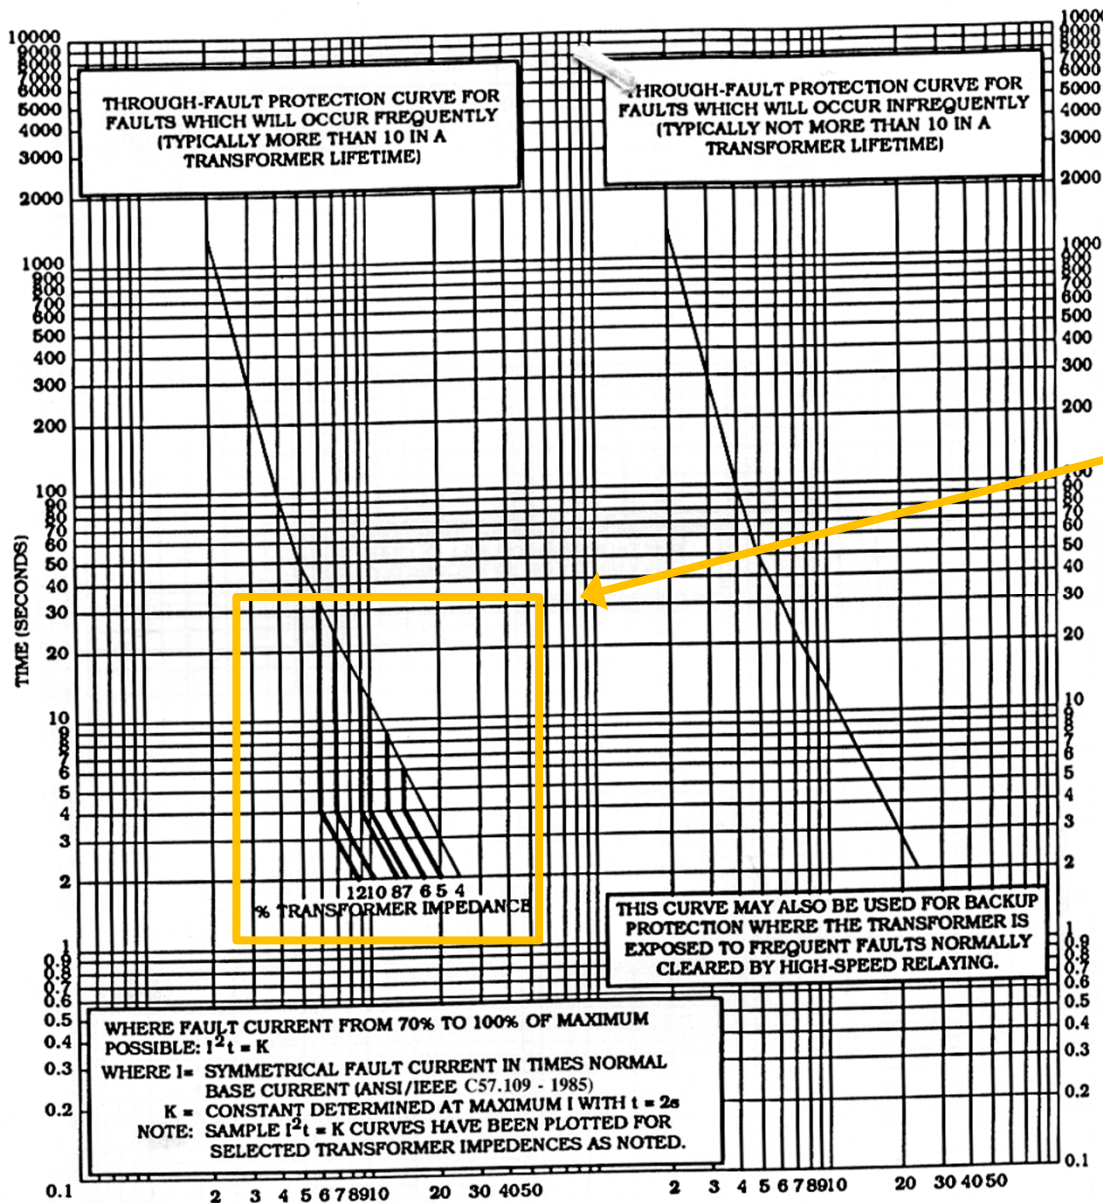


Through Fault Category 2 (501 kVA – 5 MVA)

Through Fault damage increases for a given amount of transformer Z%, as more I (I^2) through the Z results in higher energy (forces)

Cat. 2 & 3 Fault Frequency Zones (501 kVA - 30 MVA)

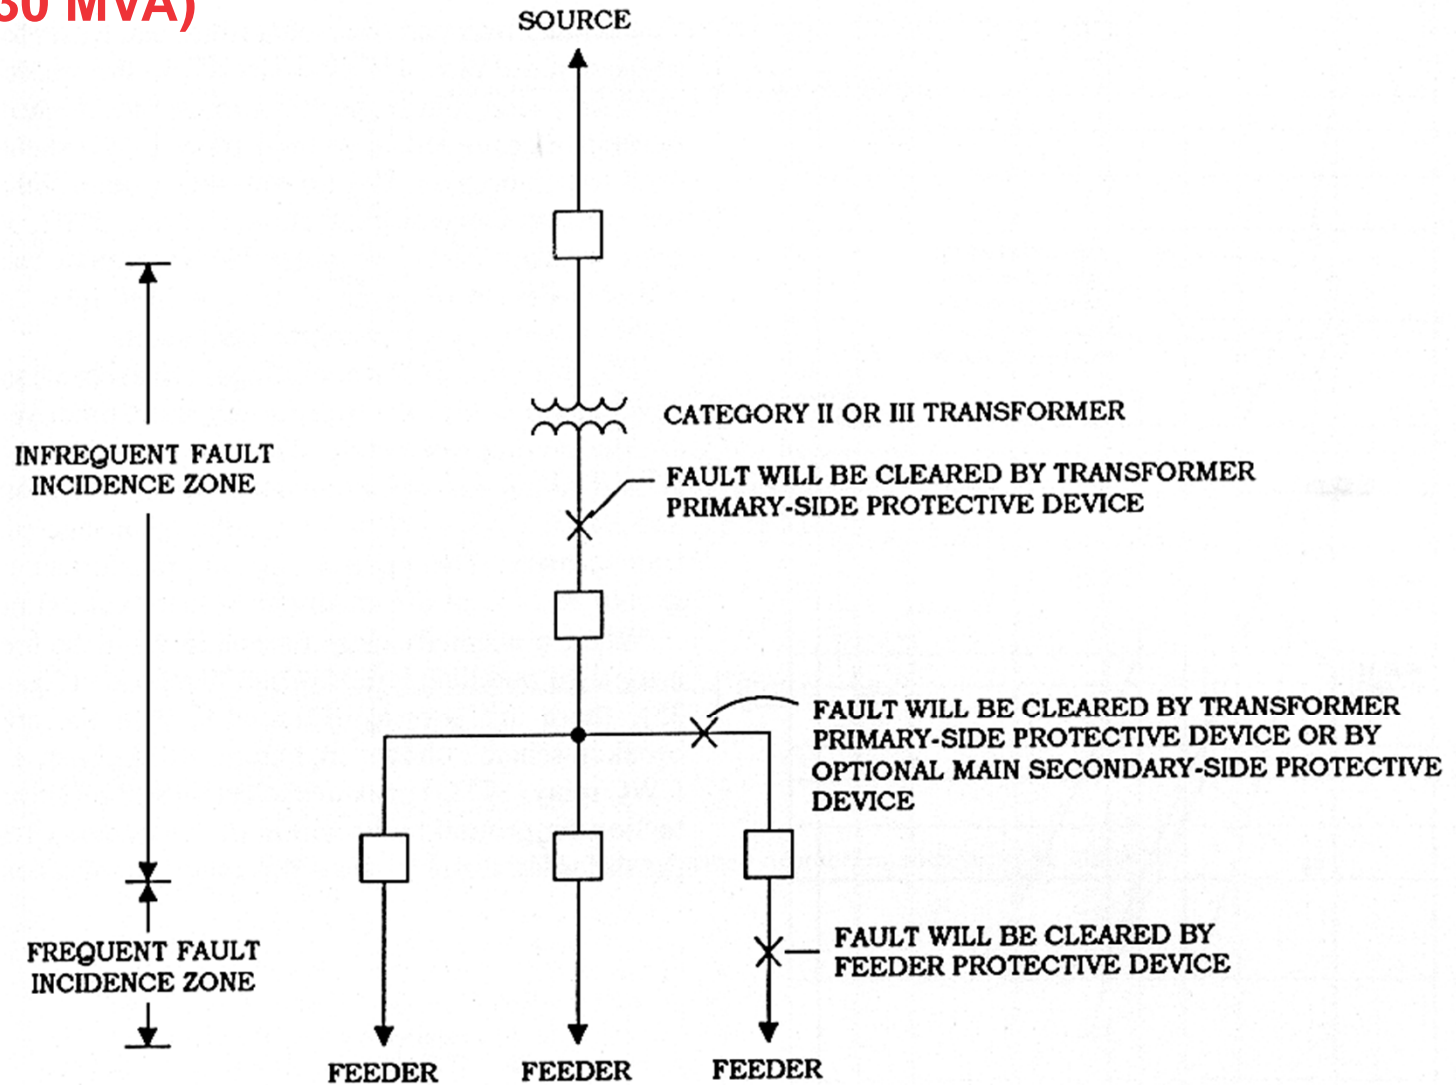


From IEEE C37.91

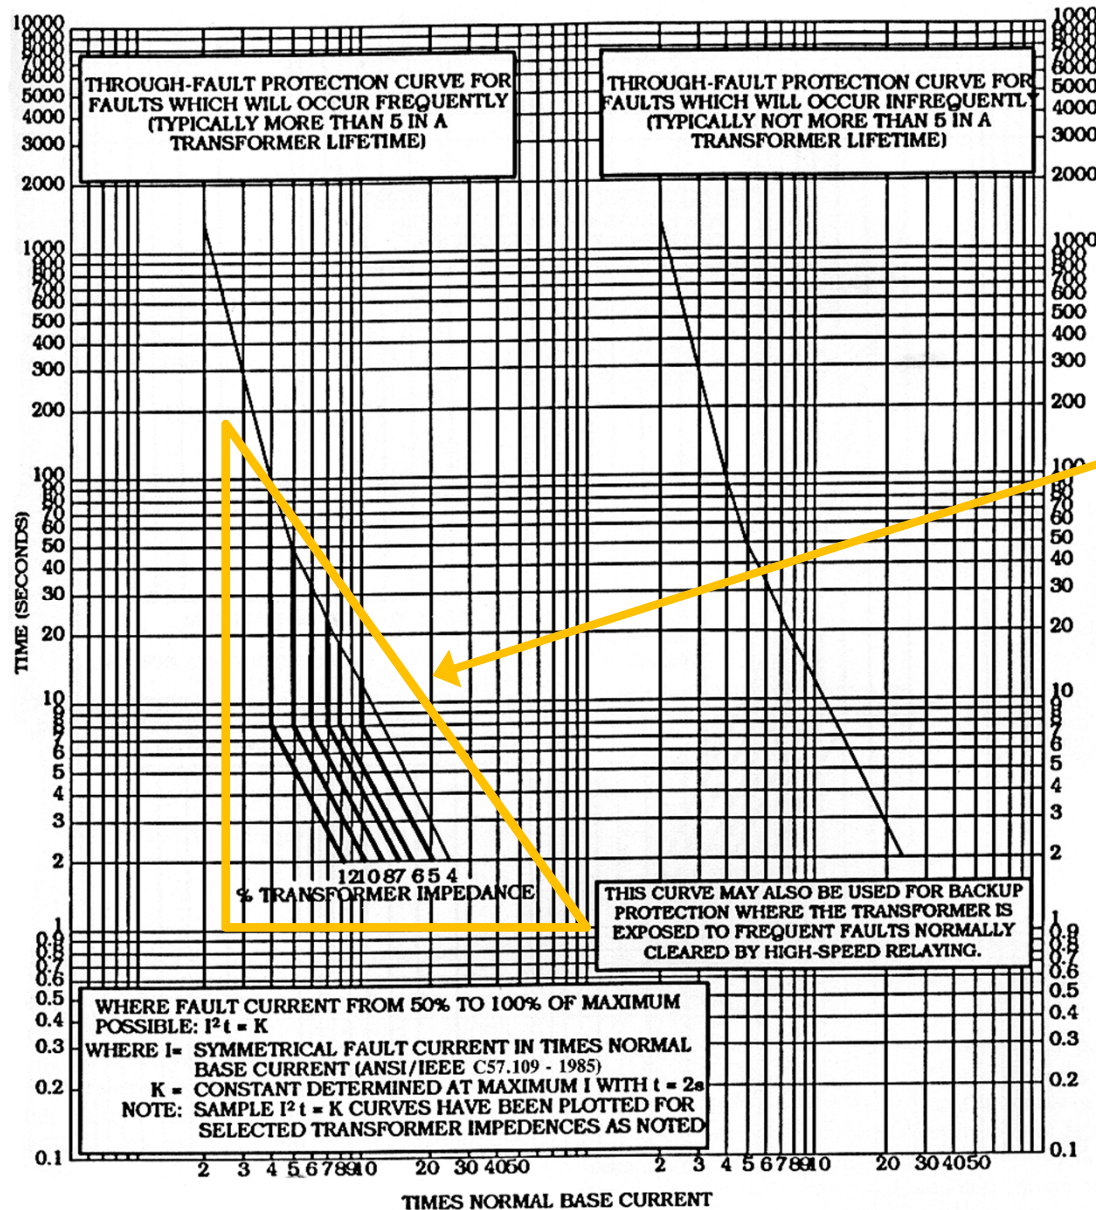

Through Fault Category 3 5.001 MVA – 30 MVA


Through Fault damage increases for a given amount of transformer Z%, as more I (I^2) through the Z results in higher energy (forces)

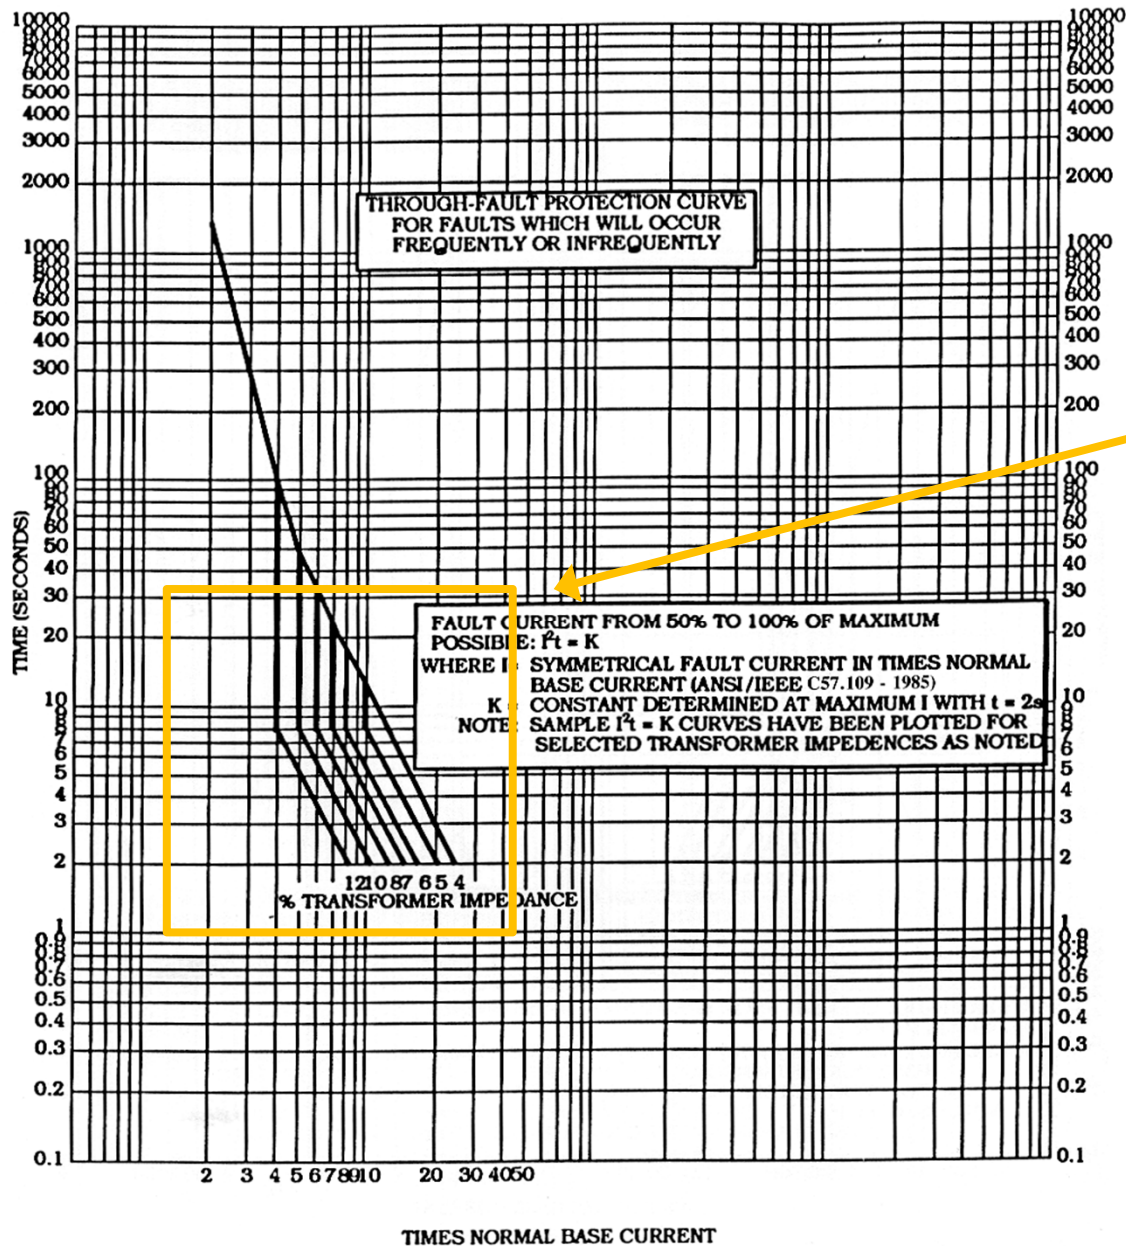

Through Fault Category 4 (>30 MVA)

Through Fault damage increases for a given amount of transformer Z%, as more I (I^2) through the Z results in higher energy (forces)

4 Winding
w/Current
Summing &
Through Fault

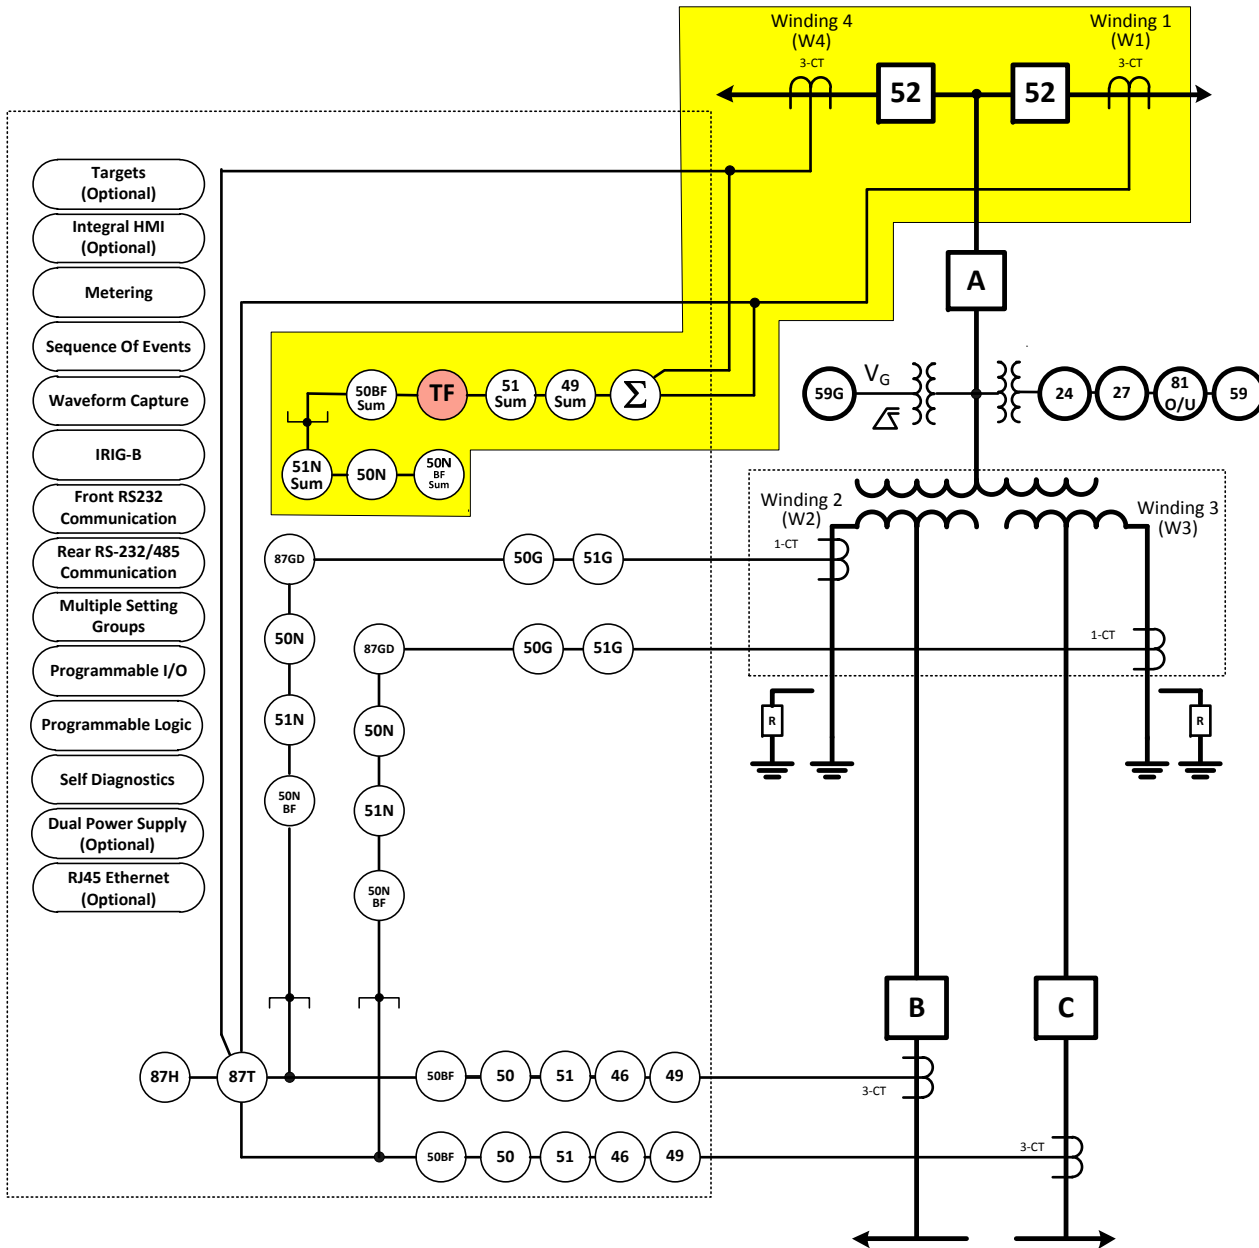

Through Fault Function Settings (TF)

- Should have a current threshold to discriminate between mechanical and thermal damage areas
 - May ignore through faults in the thermal damage zone that fails to meet recording criteria
- Should have a minimum through fault event time delay to ignore short transient through faults
- Should have a through fault operations counter
 - Any through fault that meets recording criteria increments counter
- Should have a preset for application on existing assets with through fault history
- Should have cumulative I²t setting
 - How total damage is tracked
- Should use inrush restraint to not record inrush periods
 - Inrush does not place the mechanical forces to the transformer as does a through fault

Through Fault Function Settings (TF)

Setup System

System | Output Settings | Input Settings

Settings

Nominal Voltage: 120 60 140 (V)

Phase Rotation: ACB ABC

Demand Timing Method: 15 Minutes 30 Minutes 60 Minutes

V.T. Config: VAB VBC VCA VA VB VC

Current Summing 1: W1 W2 W3 W4

Current Summing 2: W1 W2 W3 W4

Enable/Disable Windings for 87 Function

More Than 2 Windings Winding 1 and Winding 2 Only Enable All Windings

TF: Through Fault

Through Fault Current Threshold: 50.0 1.0 100.0 (A) Disable

Through Fault Current Time Delay: 20 1 8160 (Cycles)

Pickup Operation Limit: 2000 1 65535 (Operations)

Cumulative IPT Limit: 500000 1 1000000 (kA² Cycles)

Current Selection: Sum1 Sum2 W1 W2 W3 W4

Inrush Block by Even Harmonics: Disable Enable

Preset Cumulative IPT: 0.00 0.00 1000000.00 (kA² Cycles)

Outputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input checked="" type="checkbox"/> 8
<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16

Blocking Inputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9
<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 17	<input type="checkbox"/> 18

Save Cancel

Overexcitation

- Responds to overfluxing; excessive V/Hz
 - $120\text{V}/60\text{Hz} = 2 = 1\text{pu}$
- Constant operational limits
 - ANSI C37.106 & C57.12
 - 1.05 loaded, 1.10 unloaded
 - Inverse time curves typically available for values over the constant allowable level



- **Overfluxing is a voltage and frequency based issue**
- **Overfluxing protection needs to be voltage and frequency based (V/Hz)**
- **Although 5th harmonic is generated during an overfluxing event, there is no correlation between levels of 5th harmonic and severity of overfluxing**
- **Apparatus (transformers and generators) is rated with V/Hz withstand curves and limits – *not* 5th harmonic withstand limits**

Overexcitation vs. Overvoltage


- Overvoltage protection reacts to dielectric limits.
 - Exceed those limits and risk punching a hole in the insulation
 - Time is not negotiable

- Overexcitation protection reacts to overfluxing
 - Overfluxing causes heating
 - The voltage excursion may be less than the prohibited dielectric limits (overvoltage limit)
 - Time is not negotiable
 - The excess current cause excess heating which will cumulatively damage the asset, and if left long enough, will cause a catastrophic failure

Causes of Overexcitation

■ **Generating Plants**


- Excitation system runaway
- Sudden loss of load
- Operational issues (reduced frequency)
 - Static starts
 - Pumped hydro starting
 - Rotor warming

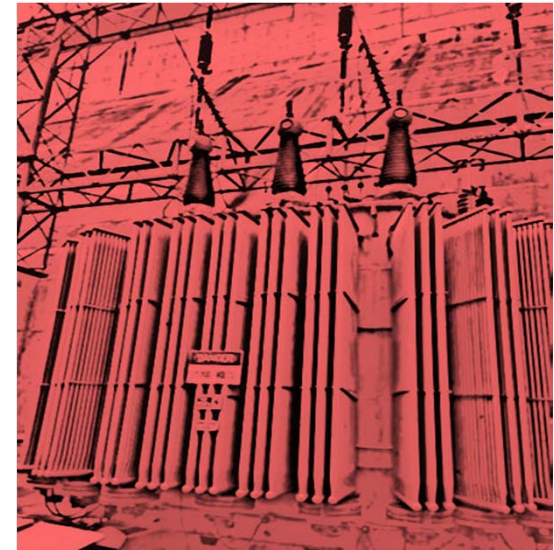

■ **Transmission Systems**


- Voltage and Reactive Support Control Failures
 - Capacitor banks ON when they should be OFF
 - Shunt reactors OFF when they should be ON
 - Near-end breaker failures resulting in voltage rise on line
 - Ferranti Effect
 - Runaway LTCs
 - Load Loss on Long Lines (Capacitive Charging Voltage Rise)

System Control Issues:
Overvoltage and Overexcitation

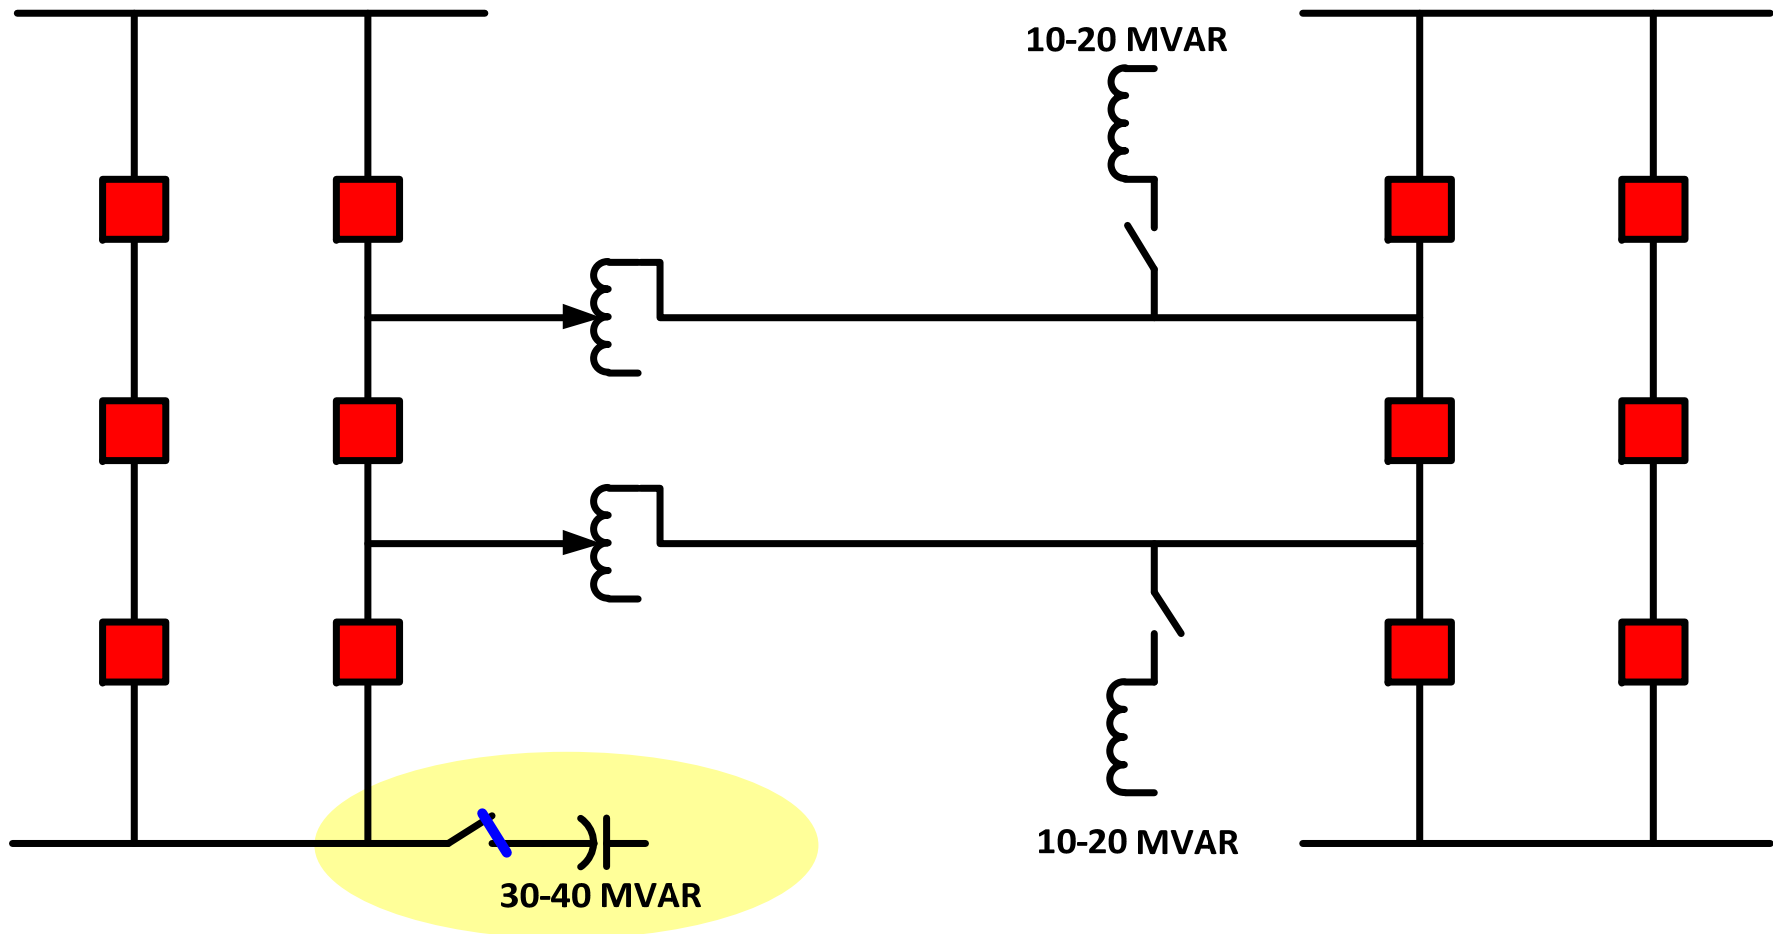


Caps ON When They Should Be Off

System Control Issues:
Overvoltage and Overexcitation

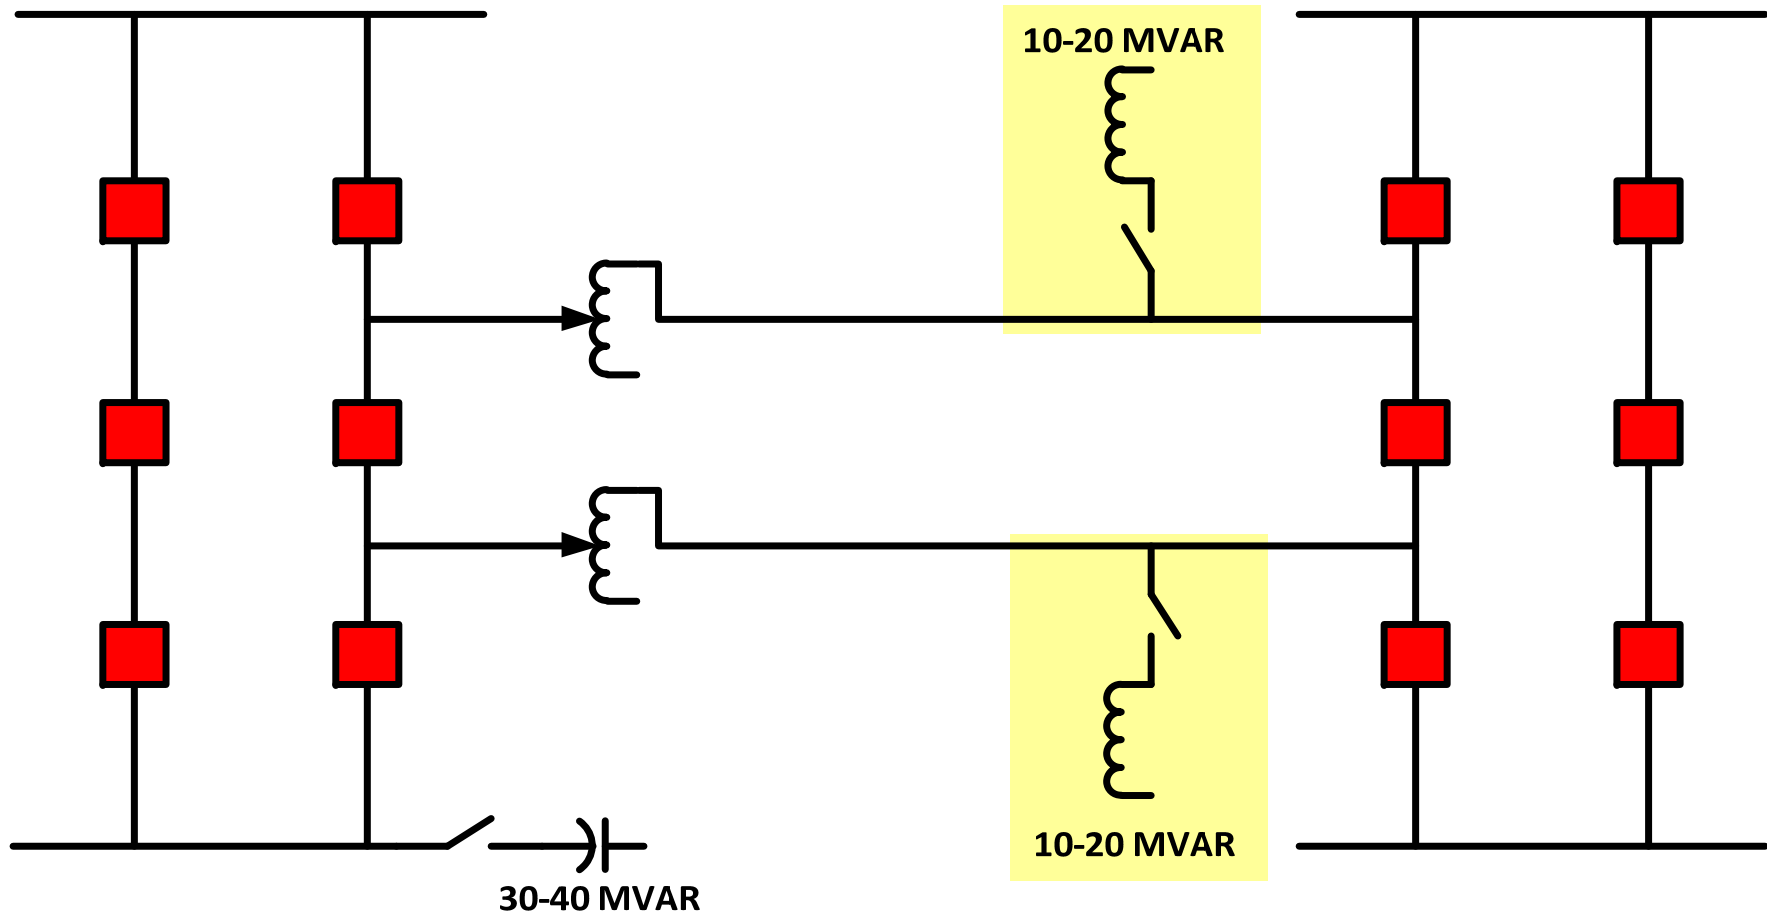


Reactors OFF When They Should Be On


System Control Issues:
Overvoltage and Overexcitation

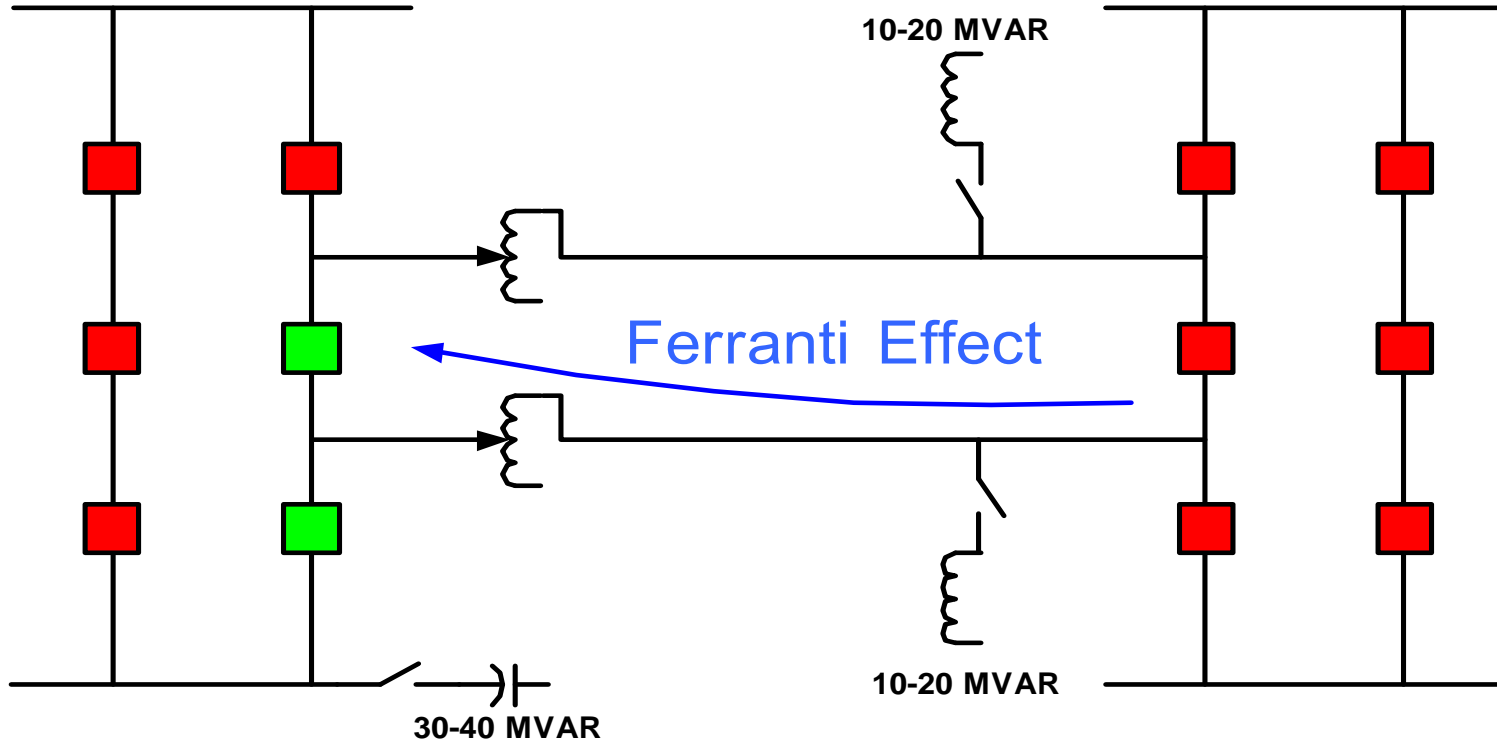

System Control Issues:
Overvoltage and Overexcitation

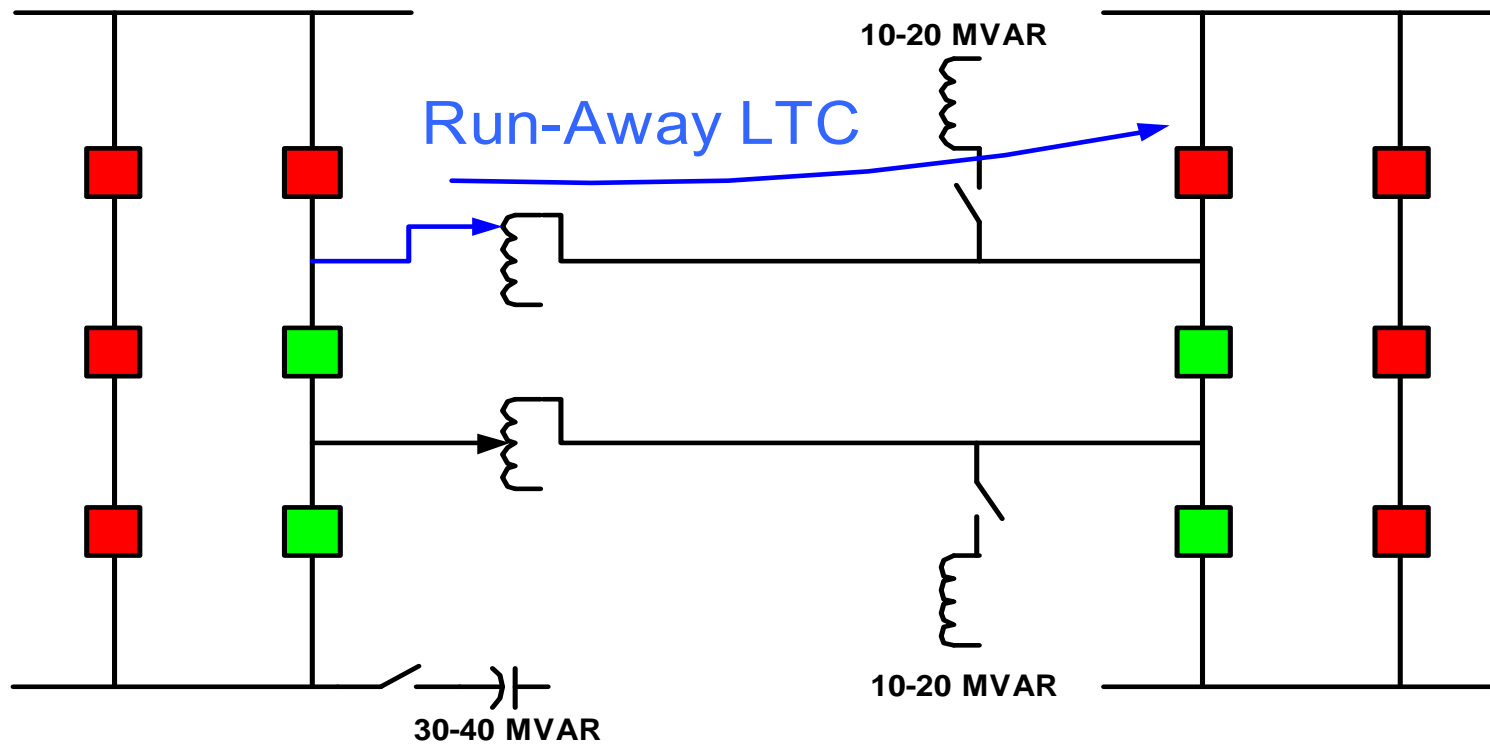


System Control Issues:
Overvoltage and Overexcitation

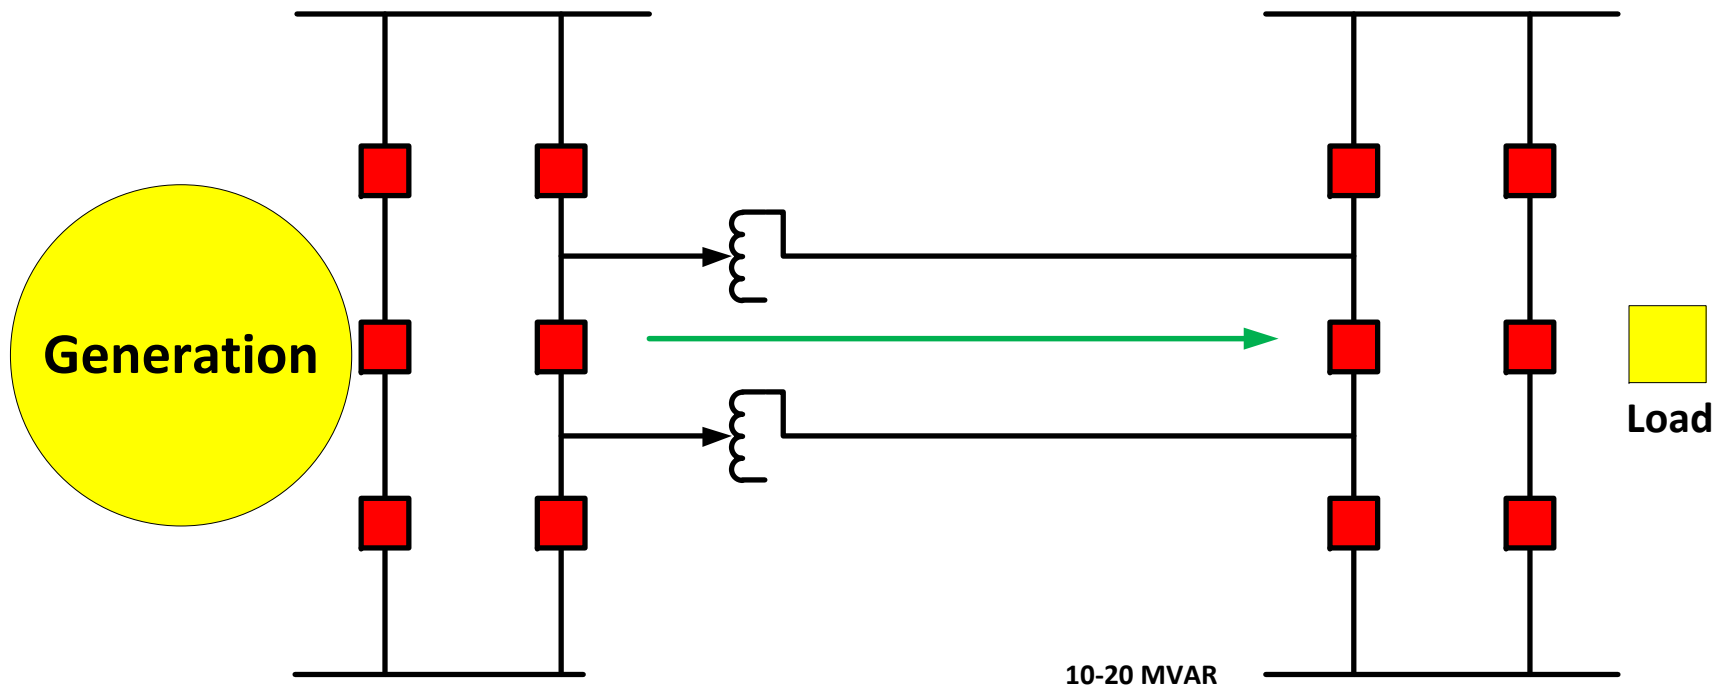

Small Load Trasport (Load Rejection at Remote Area)


1996 WECC Load Rejection Event

Overexcitation Event

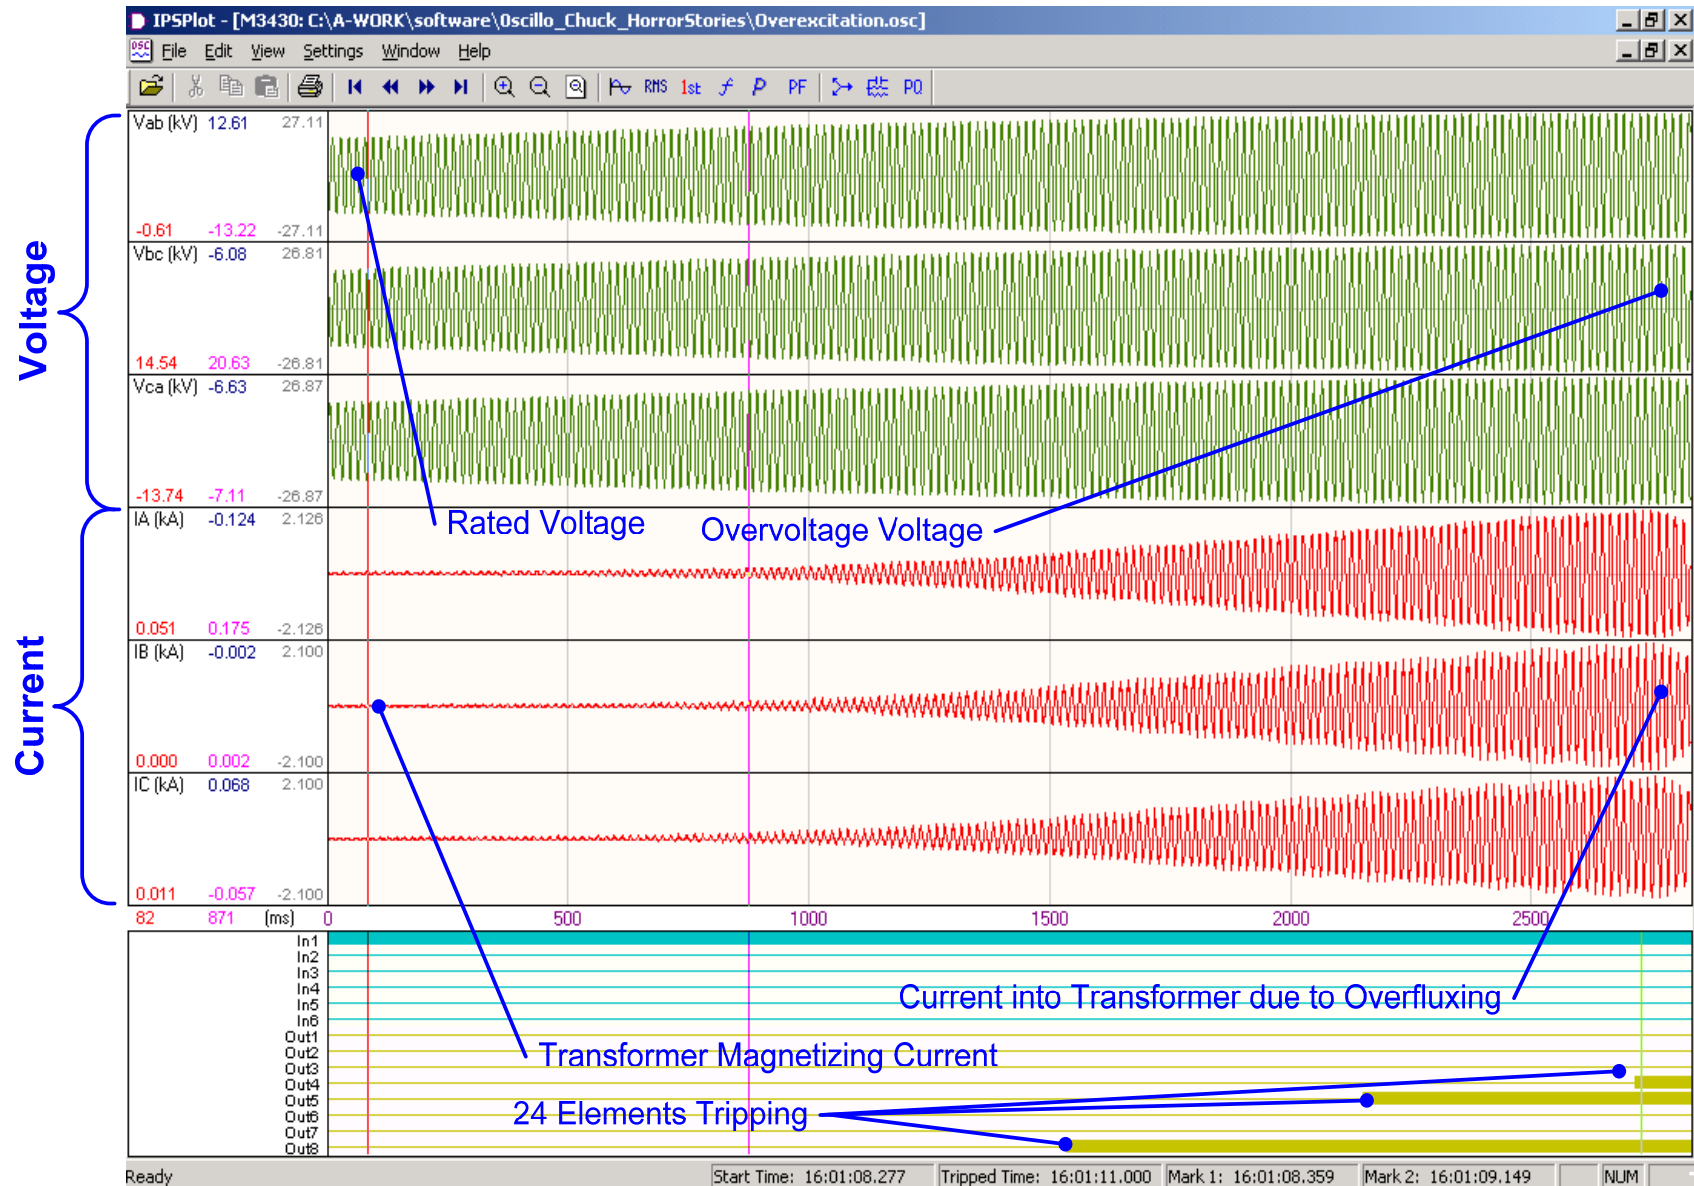


Overexcitation Curves

This is typically how the apparatus manufacturer specifies the V/Hz curves

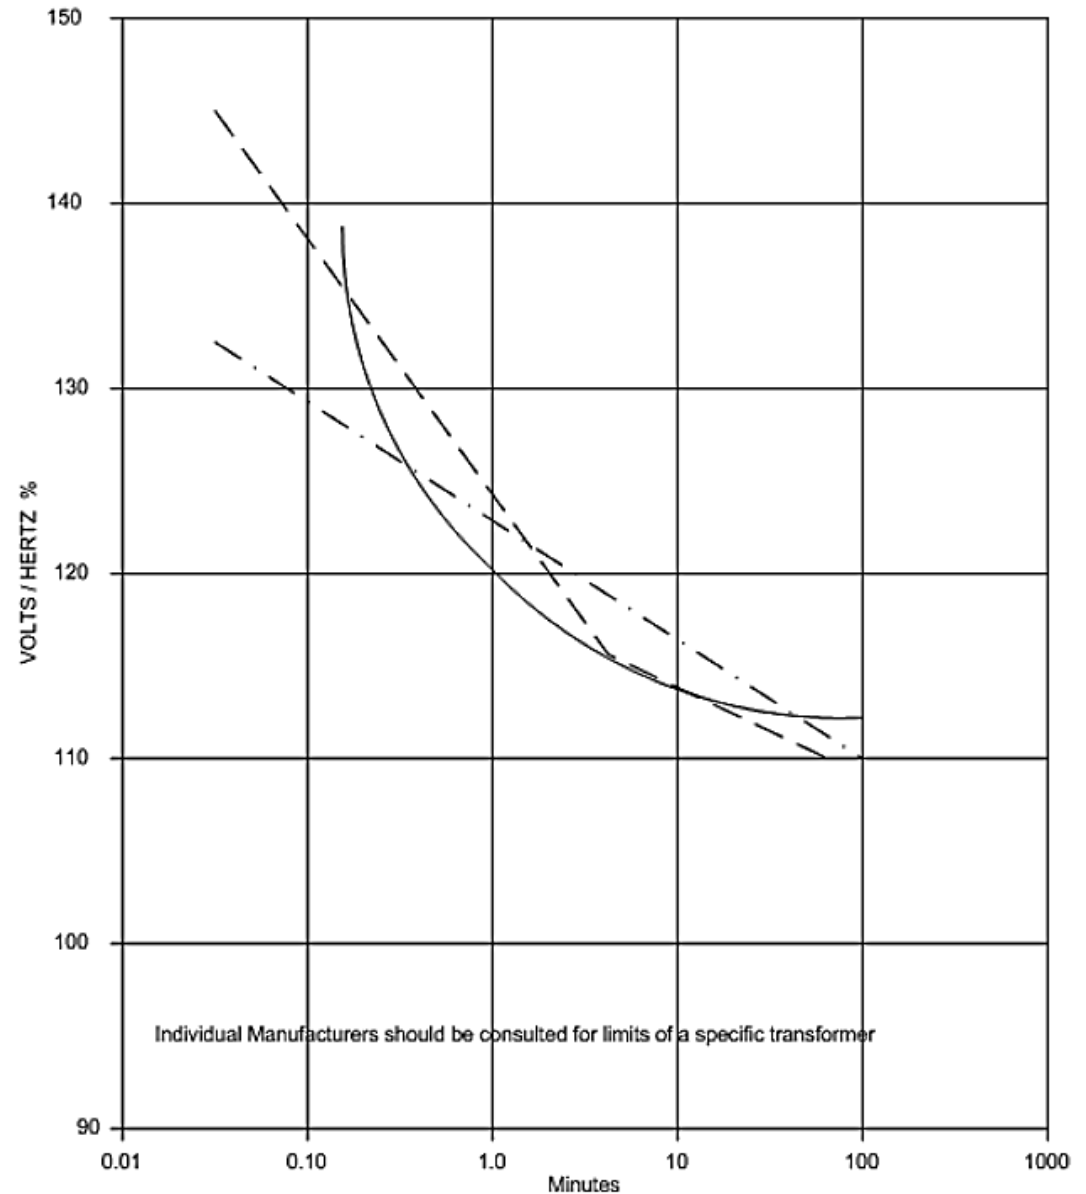


Overexcitation Curves

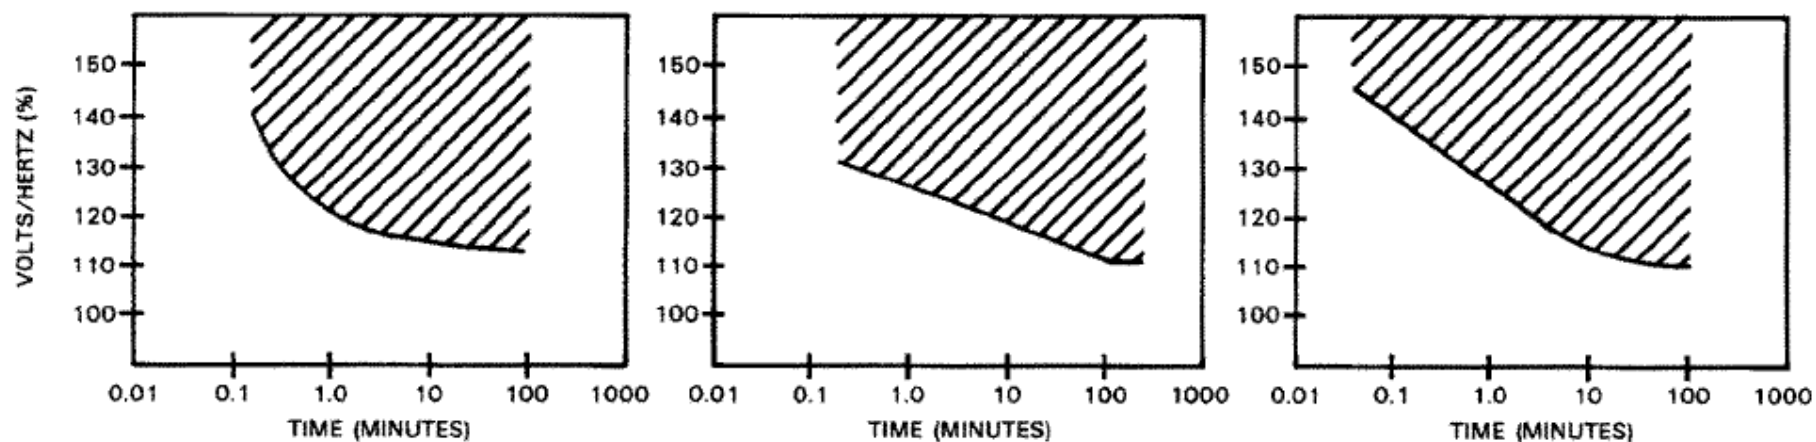

This is typically how the apparatus manufacturer specifies the V/Hz curves

Overexcitation Relay Curves

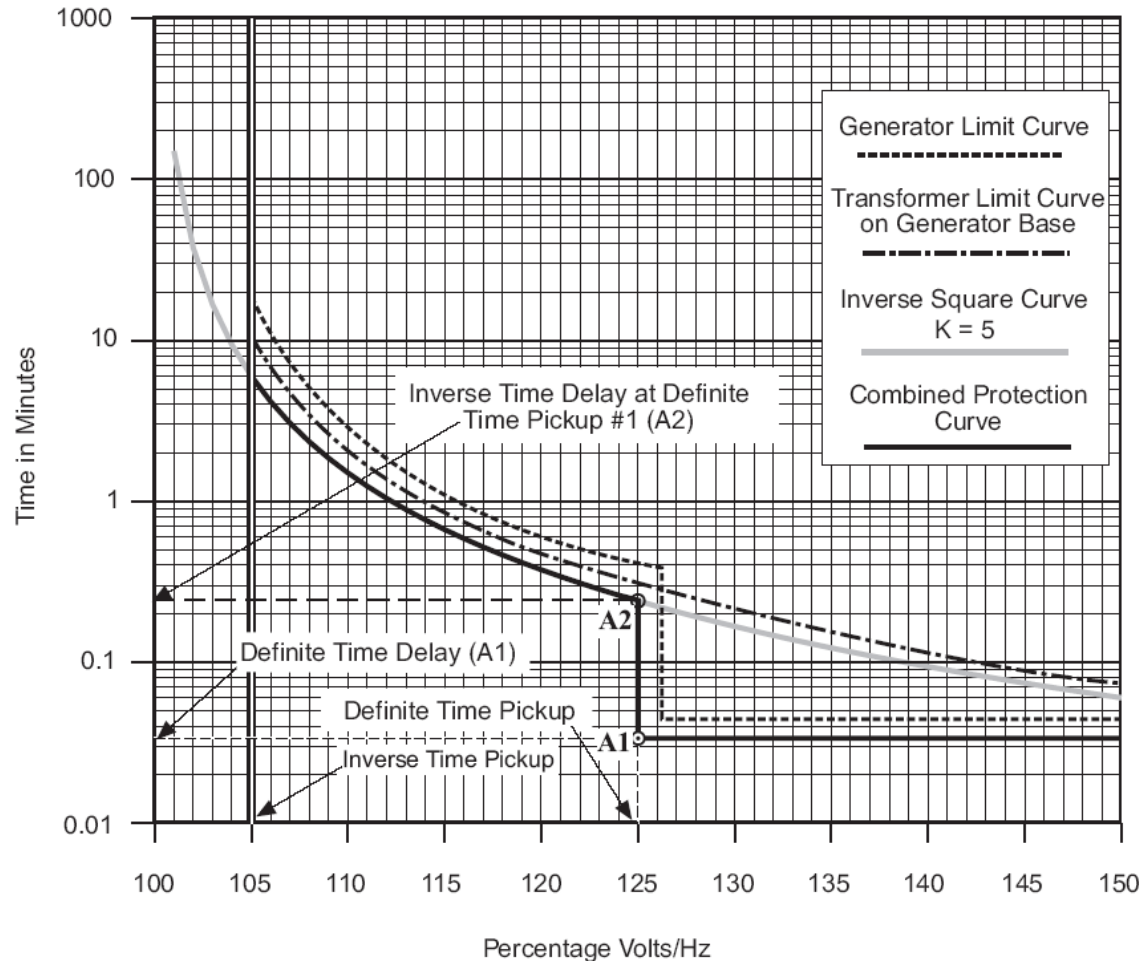

This is how protection engineers enter the v/Hz curve into a protective device

Overexcitation (24)

24: Volts/Hz Overexcitation ✕

Pickup: 100 ◀ ◻ ▶ 200 (%)

Time Delay: 30 ◀ ◻ ▶ 8160 (Cycles)

Definite Time #1

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16

Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18

Pickup: 100 ◀ ◻ ▶ 200 (%)

Time Delay: 30 ◀ ◻ ▶ 8160 (Cycles)

Definite Time #2

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16

Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18

Pickup: 100 ◀ ◻ ▶ 150 (%)

Time Dial: 1 ◀ ◻ ▶ 100

Reset Rate: 1 ◀ ◻ ▶ 999 (Sec)

Inverse Time

Inverse Time Curves: #1 #2 #3 #4

Outputs

1 2 3 4 5 6 7 8

9 10 11 12 13 14 15 16

Blocking Inputs

1 2 3 4 5 6 7 8 9

10 11 12 13 14 15 16 17 18

Types of Protection: Differential


Advantages

- Provides high speed detection of faults that can reduce damage due to the flow of fault currents
- Offers high speed isolation of the faulted transformer, preserving stability and decreasing momentary sag duration
- No need to coordinate with other protections
- The location of the fault is determined more precisely
 - Within the zone of differential protection as demarked by CT location


Types of Protection: Phase Differential

- Applied with variable percentage slopes to accommodate CT saturation and CT ratio errors
- Applied with inrush and overexcitation restraints
- Pickup/slope setting should consider: magnetizing current, turns ratio errors due to fixed taps and +/- 10% variation due to LTC
- May not be sensitive enough for all faults (low level, ground faults near neutral)


Phase Differential: Basic Differential Relay

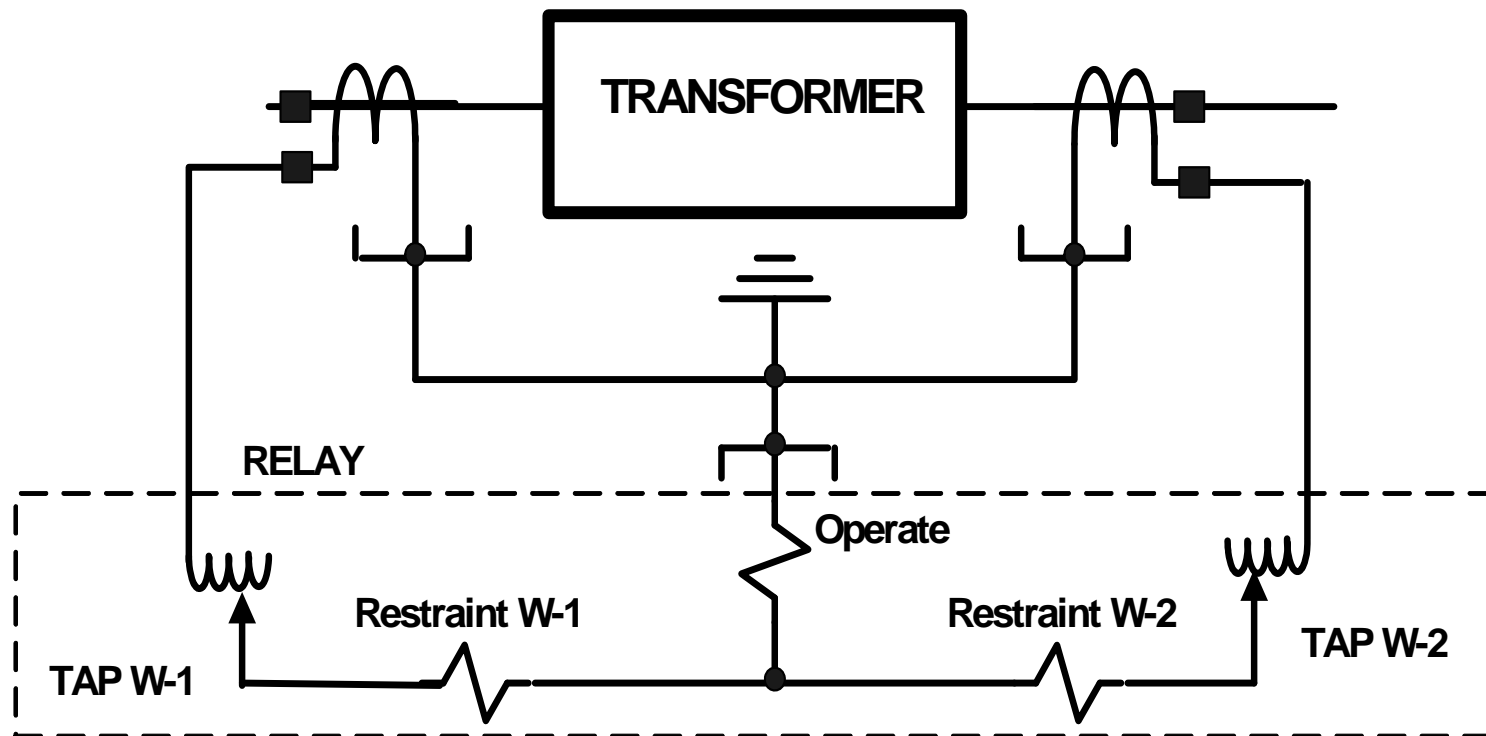

Basic Differential Relay - External Fault

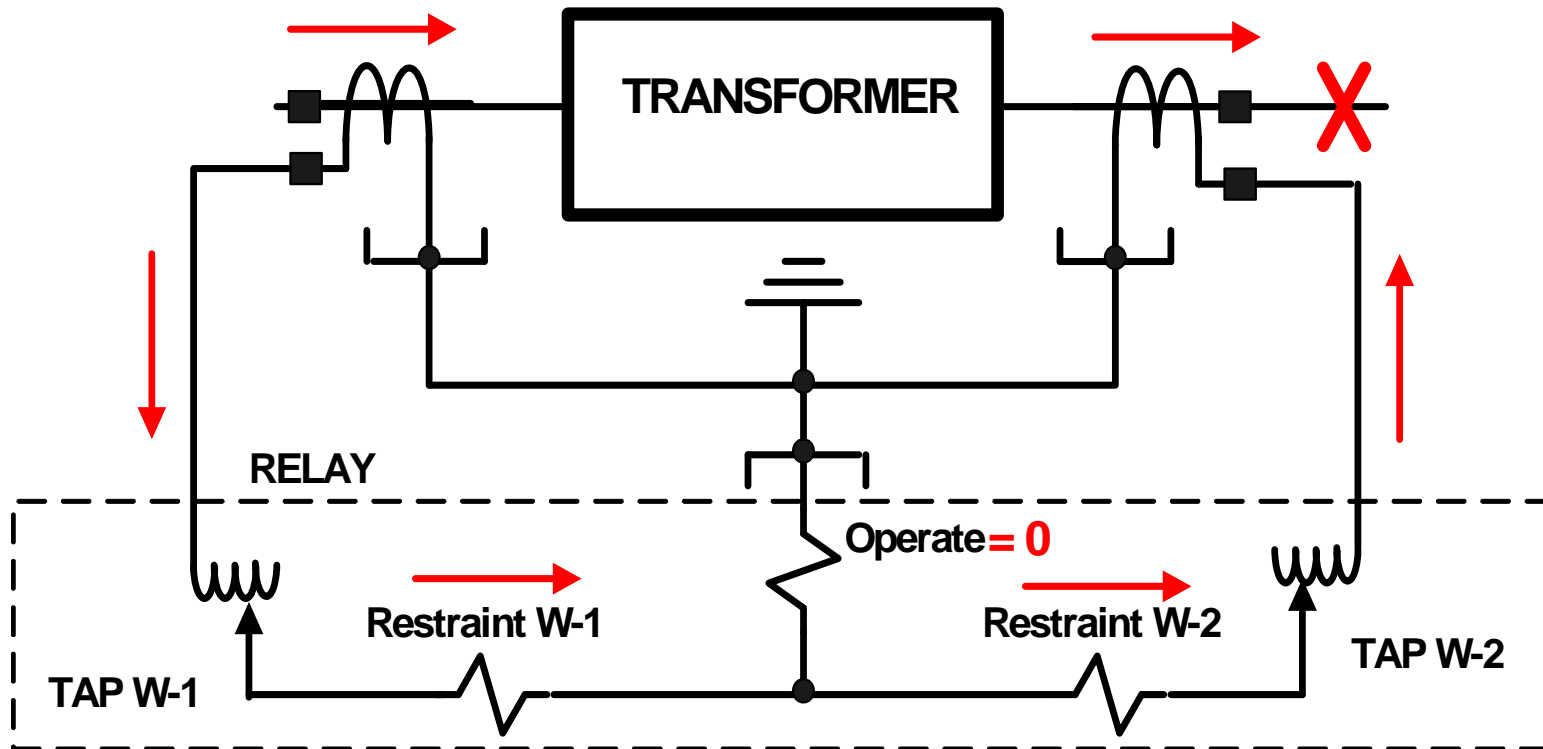


Basic Differential Relay - Internal Fault

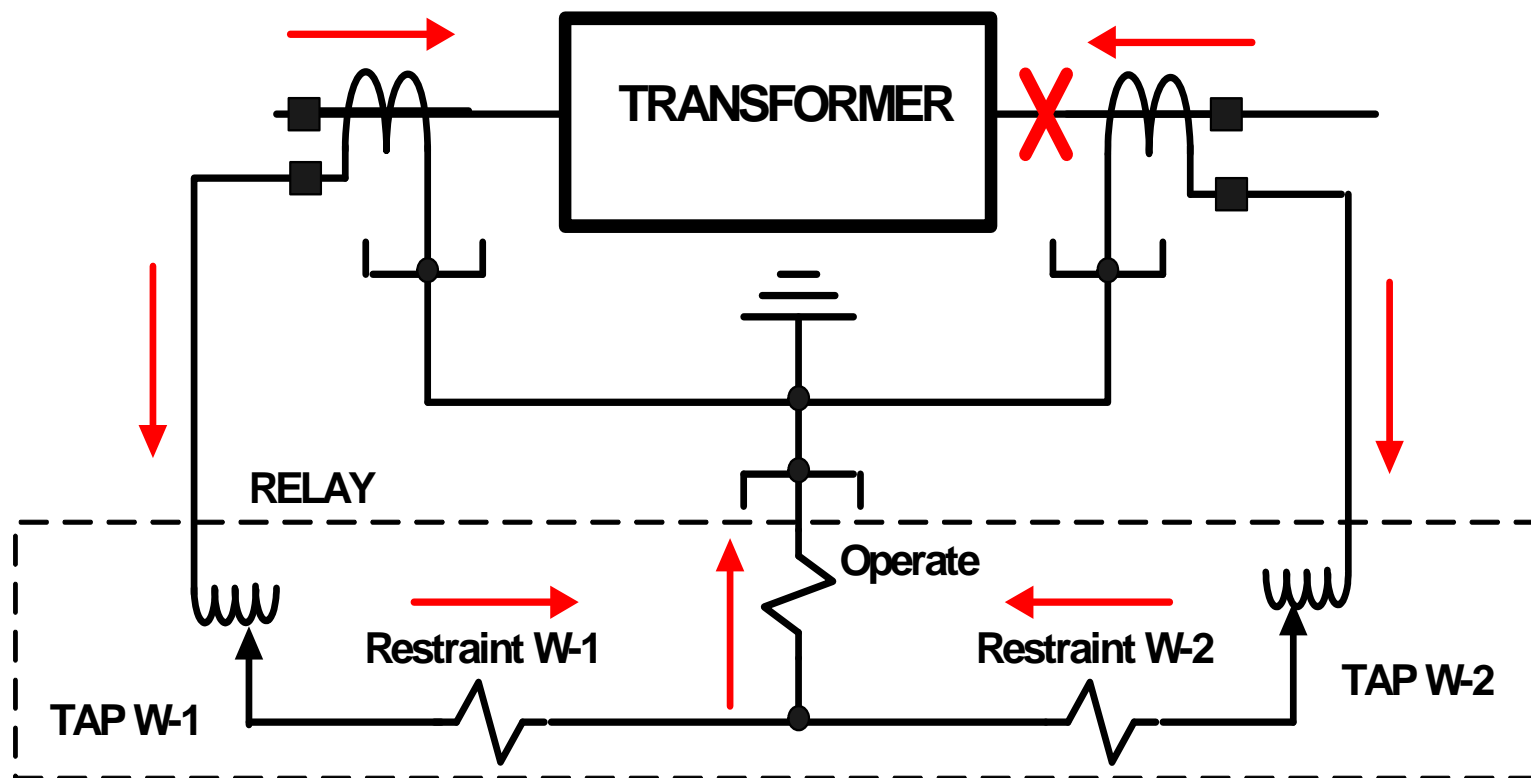

Differential Protection

- What goes into a “unit” comes out of a “unit”
- Kirchoff’s Law: The sum of the currents entering and leaving a junction is zero
- Straight forward concept, but not that simple in practice with transformers
- A host of issues challenges security and reliability of transformer differential protection

Typical Phase Differential Characteristic

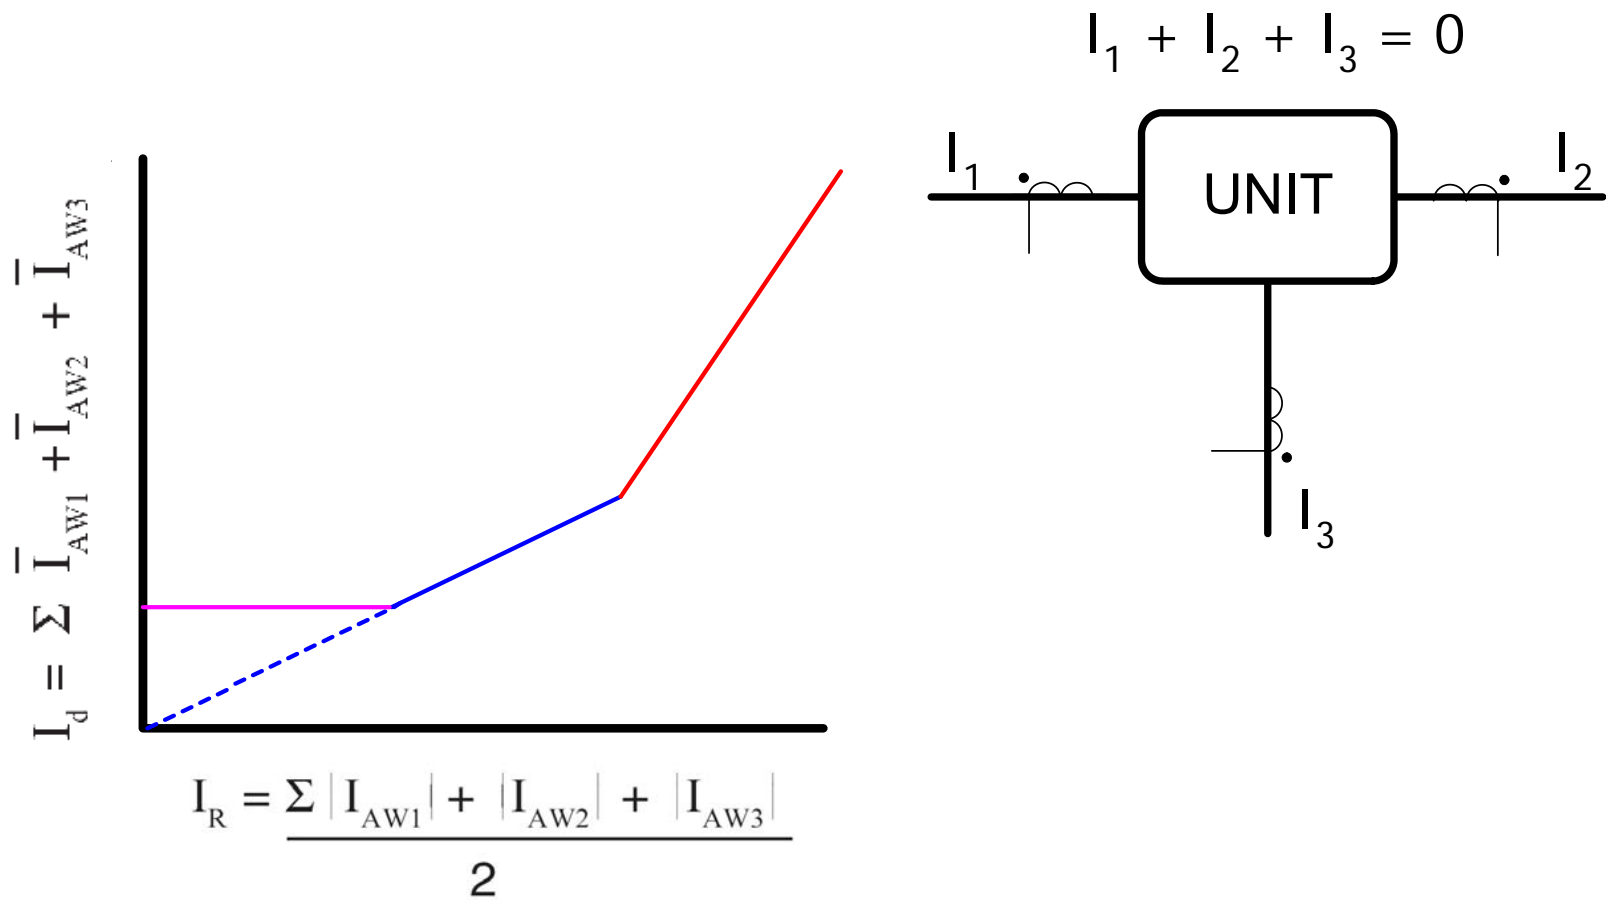

Unique Issues Applying to Transformer Differential Protection


- **CT ratio** caused current mismatch
- **Transformation ratio** caused current mismatch (fixed taps)
- **LTC induced current mismatch**
- **Delta-wye transformation** of currents
 - Vector group and current derivation issues
- **Zero-sequence current elimination** for external ground faults on wye windings
- **Inrush phenomena** and its resultant current mismatch

Unique Issues Applying to Transformer Differential Protection

- **Harmonic content available during inrush** period due to point-on-wave switching
 - Especially with newer transformers with step-lap core construction
- **Overexcitation phenomena** and its resultant current mismatch
- **Internal ground fault sensitivity** concerns
- **Switch onto fault** concerns
- **CT saturation, remanance and tolerance**


Application Considerations: Paralleling Sources

- When paralleling sources for differential protection, beware!
- Paralleled sources (not load, specifically sources) have different saturation characteristics and present the differential element input with corrupt values
- Consider through-fault on bus section
 - One CT saturates, the other does not
 - Result: Input is presented with “false difference” due to combining of CTs from different sources outside of relay

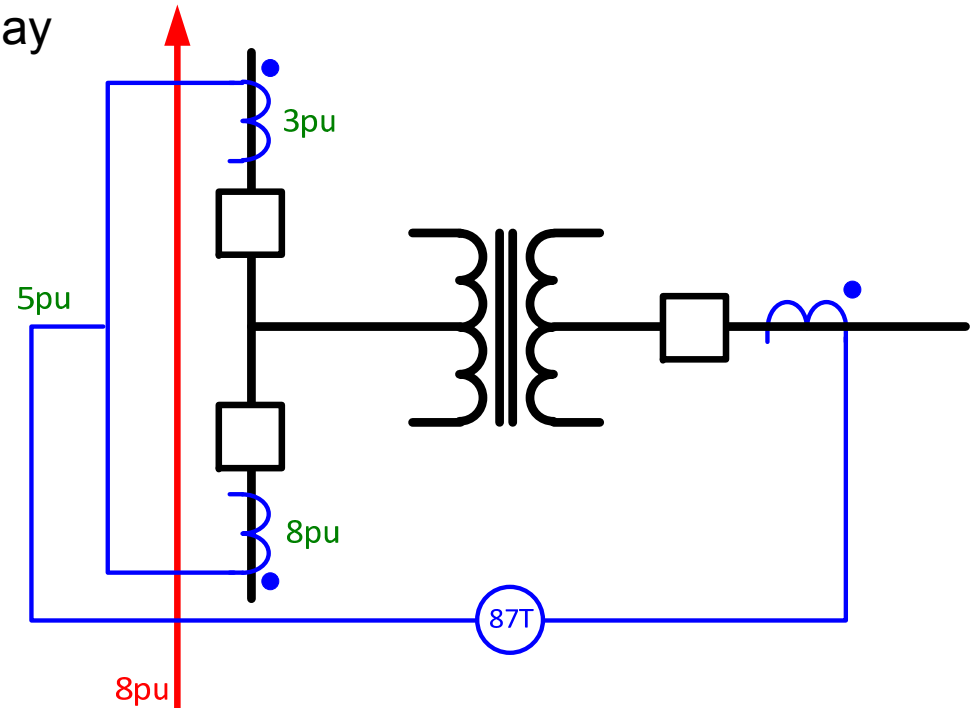


Differential Element Security Challenge

- The problem with external faults is the possibility of CT saturation making an external fault “look” internal to the differential relay element

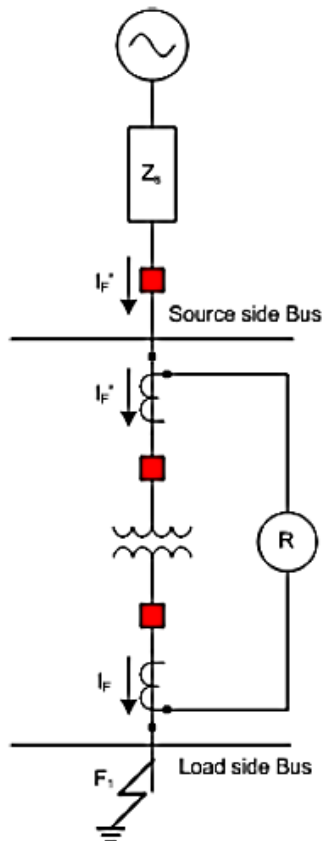


(a) Source side and load side buses are single bus arrangements

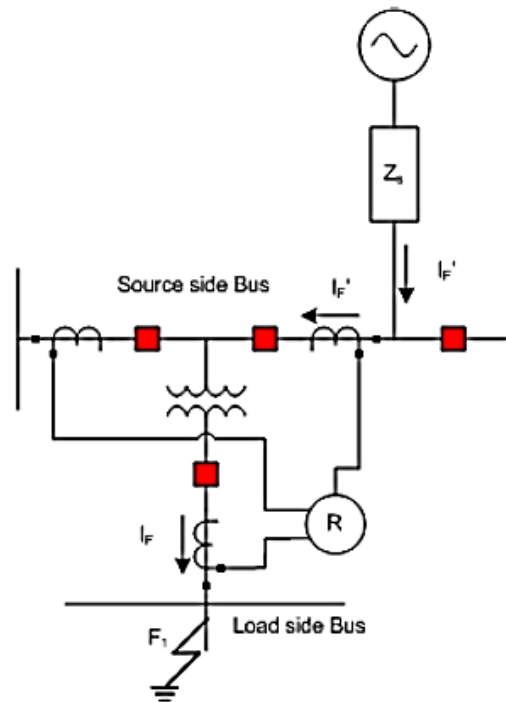

(b) Source side bus is a breaker and a half scheme and the load side bus is a single bus arrangements

Note 1: CTs for the transformer differential only are shown in this figure

Note 2: Load currents are ignored in this figure

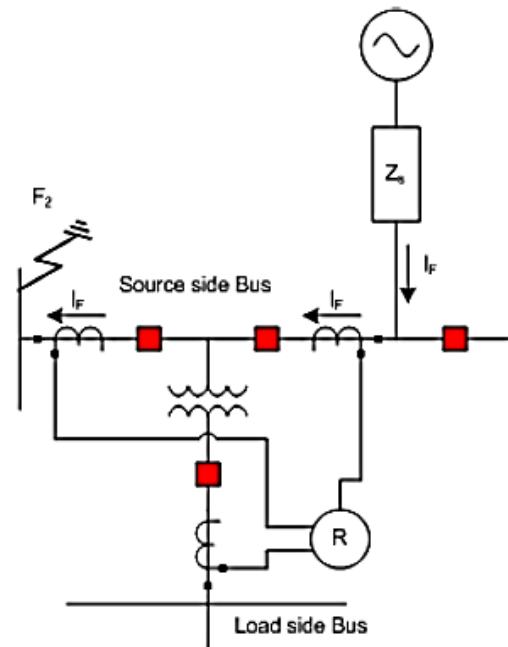

(c) Source side bus is a breaker and a half scheme and the load side bus is a single bus arrangements

Note 1: CTs for the transformer differential only are shown in this figure

Note 2: Load currents are ignored in this figure


(R) This may be a differential or overcurrent relay

From IEEE C37.91

CT Performance: 200:5, C200, R=0.5, Offset = 0.5, 1000A

INPUT PARAMETERS:

		ENTER:	
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	200	volts rms
Turns ratio = n2/1=	N =	40	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.50	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	1,000	amps rms

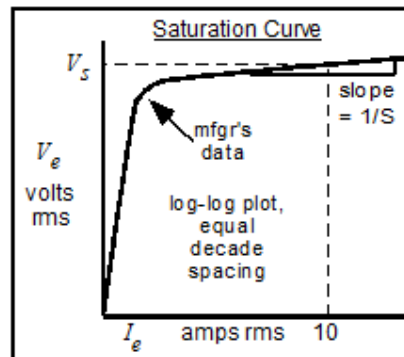


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	0.750	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: $ie = A * I^S$:	1.61E+04	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: Ideal (blue) and actual (black) secondary current in amps vs time in seconds.


Thin lines: Ideal (blue) and actual (black) secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

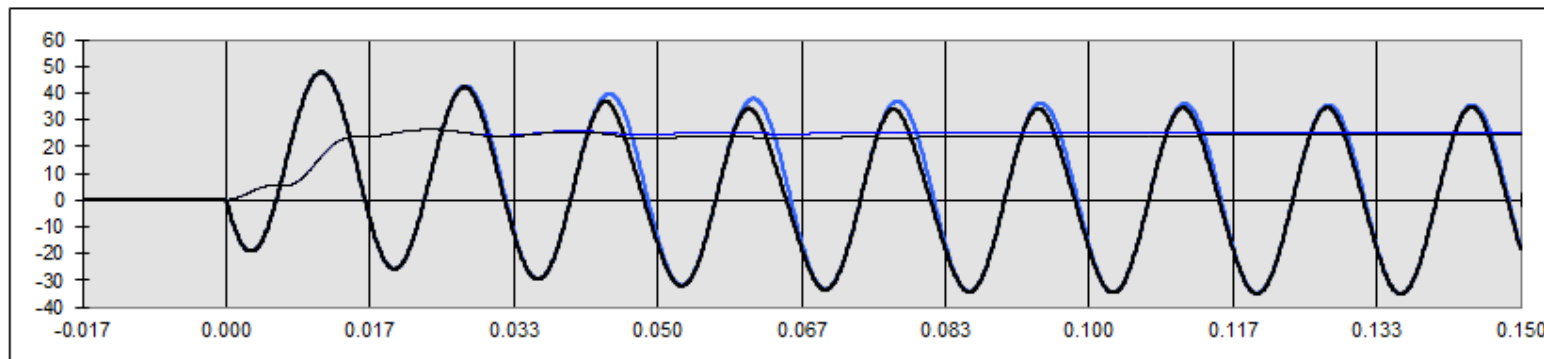

CT Performance: 200:5, C200, R=0.5, Offset = 0.5, 2000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	200	volts rms
Turns ratio = n2/1=	N =	40	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.50	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	2,000	amps rms

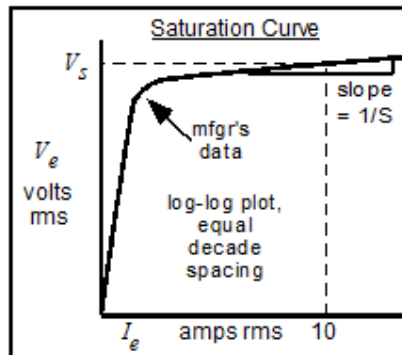


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	0.750	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous i_e versus lambda curve: $i_e = A * I^S$	1.61E+04	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: Ideal (blue) and actual (black) secondary current in amps vs time in seconds.

Thin lines: Ideal (blue) and actual (black) secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

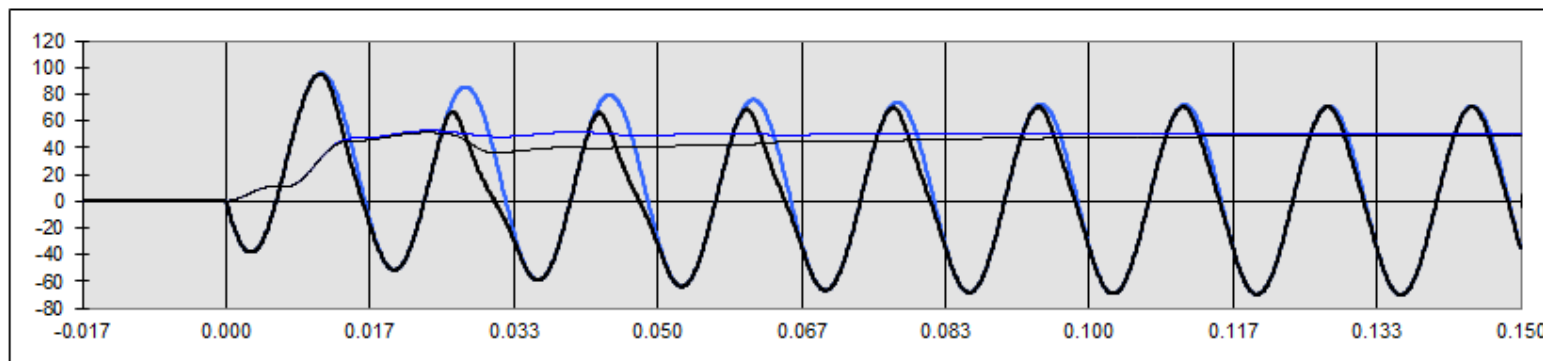


http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 200:5, C200, R=0.5, Offset = 0.75, 2000A

INPUT PARAMETERS:

	ENTER:	
Inverse of sat. curve slope =	S =	22 ---
RMS voltage at 10A exc. current =	Vs =	200 volts rms
Turns ratio = n2/1=	N =	40 ---
Winding resistance =	Rw =	0.300 ohms
Burden resistance =	Rb =	0.500 ohms
Burden reactance =	Xb =	0.500 ohms
System X/R ratio =	XoverR =	12.0 ---
Per unit offset in primary current =	Off =	0.75 -1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50 ---
Symmetrical primary fault current =	Ip =	2,000 amps rms

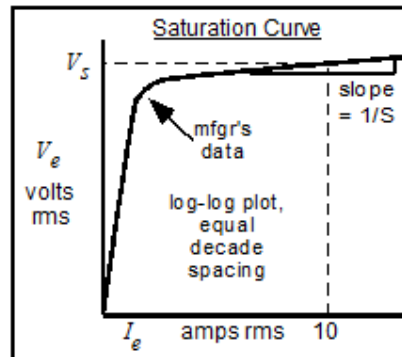


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	0.750	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: $ie = A * I^S$	1.61E+04	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: Ideal (blue) and actual (black) secondary current in amps vs time in seconds.

Thin lines: Ideal (blue) and actual (black) secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

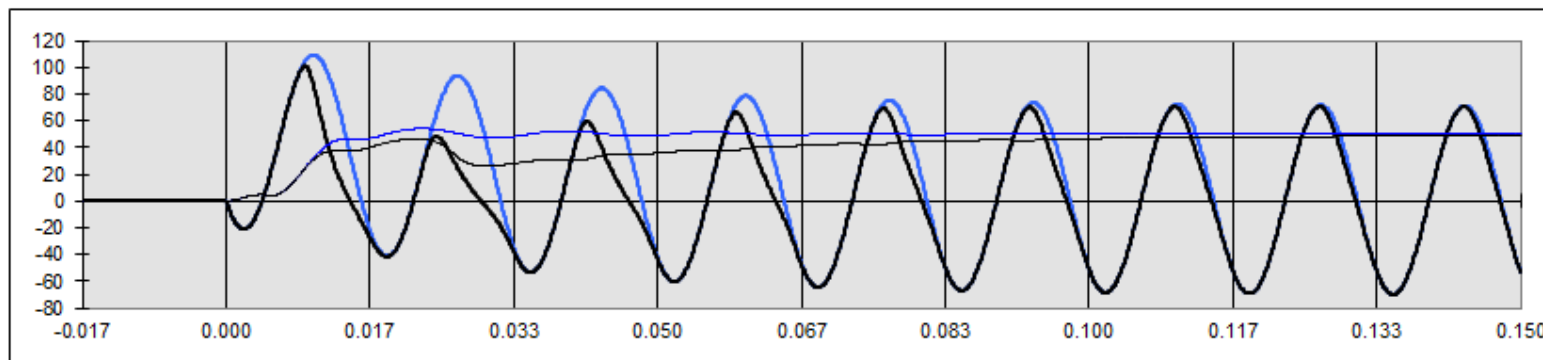


http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 200:5, C200, R=0.75, Offset = 0.75, 2000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	200	volts rms
Turns ratio = n2/1=	N =	40	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.75	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.75	---
Symmetrical primary fault current =	Ip =	2,000	amps rms

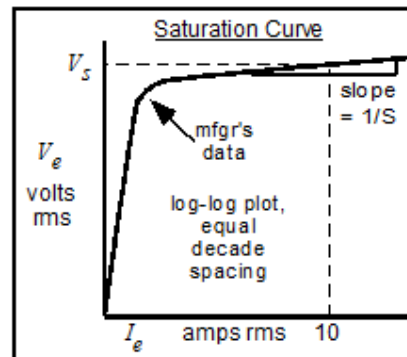


CALCULATED:

Rt = Total burden resistance = Rw + Rb =	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	0.750	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: ie = A * I ^S :	1.61E+04	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: **Ideal (blue)** and **actual (black)** secondary current in amps vs time in seconds.

Thin lines: **Ideal (blue)** and **actual (black)** secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

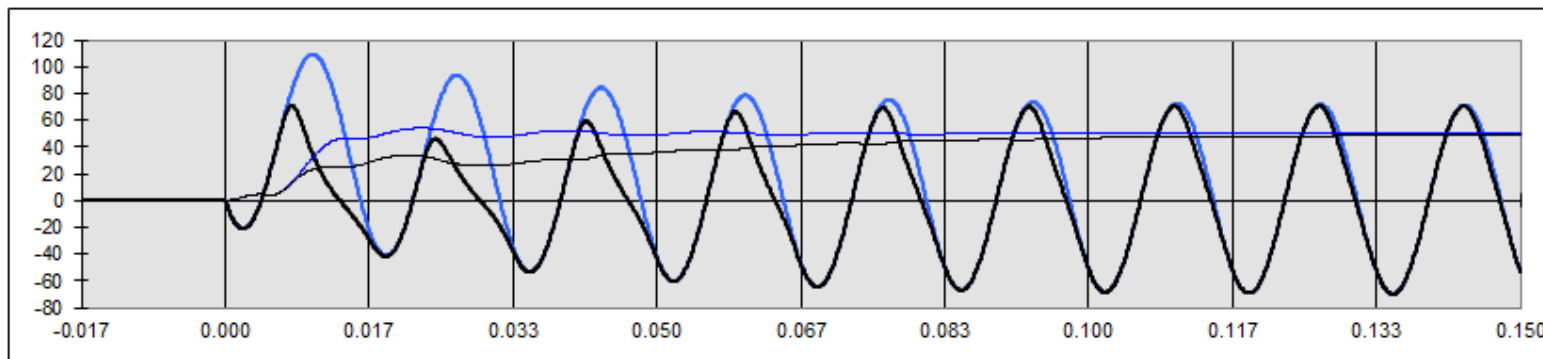


http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 400:5, C400, R=0.5, Offset = 0.5, 2000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	400	volts rms
Turns ratio = n2/1 =	N =	80	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.50	-1 < Off < 1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	2,000	amps rms

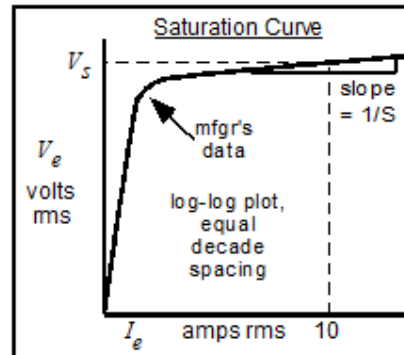


CALCULATED:

Rt = Total burden resistance = Rw + Rb =	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	1.501	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: ie = A * λ ^S :	3.83E-03	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: **ideal (blue)** and **actual (black)** secondary current in amps vs time in seconds.

Thin lines: **ideal (blue)** and **actual (black)** secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

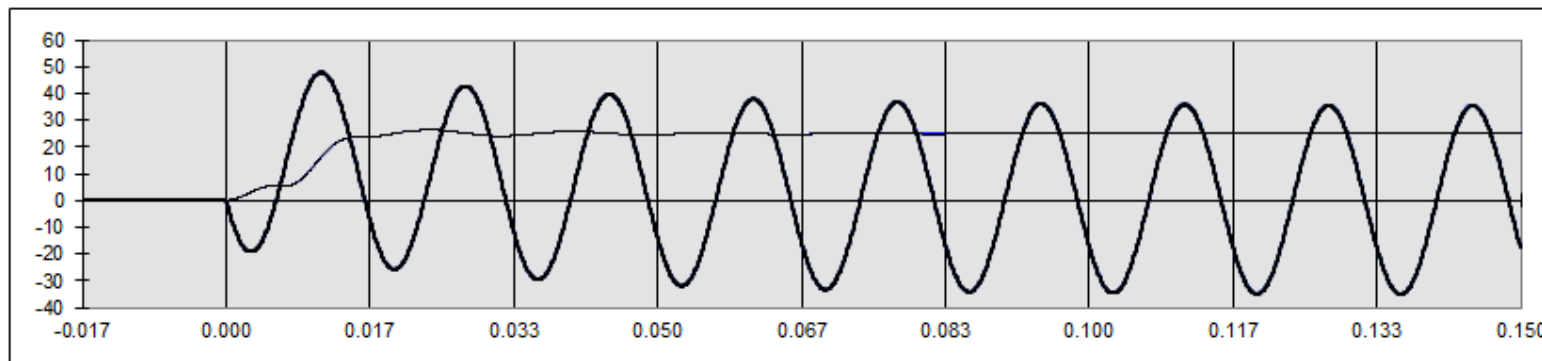


http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 400:5, C400, R=0.5, Offset = 0.5, 4000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	400	volts rms
Turns ratio = n2/1=	N =	80	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.50	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	4,000	amps rms

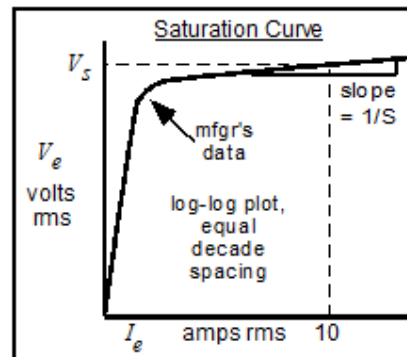


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	1.501	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: $i_e = A * \lambda^S$:	3.83E-03	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: **ideal (blue)** and **actual (black)** secondary current in amps vs time in seconds.

Thin lines: **ideal (blue)** and **actual (black)** secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

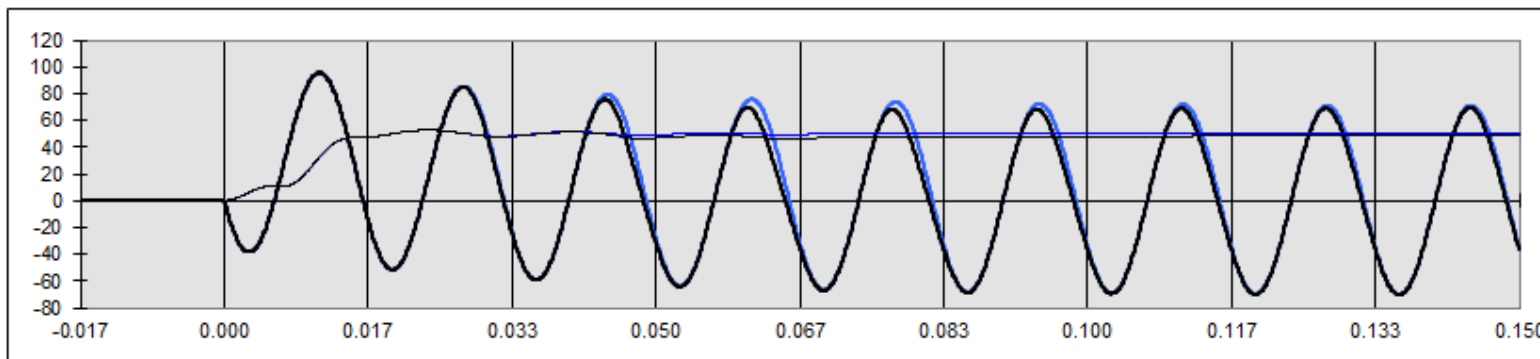


http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 400:5, C400, R=0.5, Offset = 0.5, 8000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	400	volts rms
Turns ratio = n2/1=	N =	80	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.50	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	8,000	amps rms

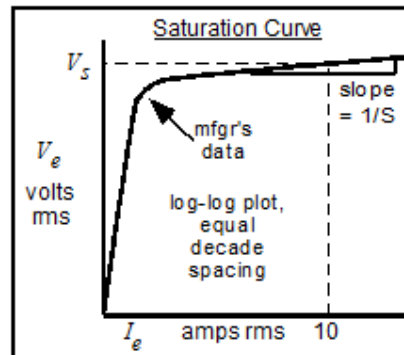


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	1.501	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: $i_e = A * I^S$	3.83E-03	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: **ideal (blue)** and **actual (black)** secondary current in amps vs time in seconds.


Thin lines: **ideal (blue)** and **actual (black)** secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

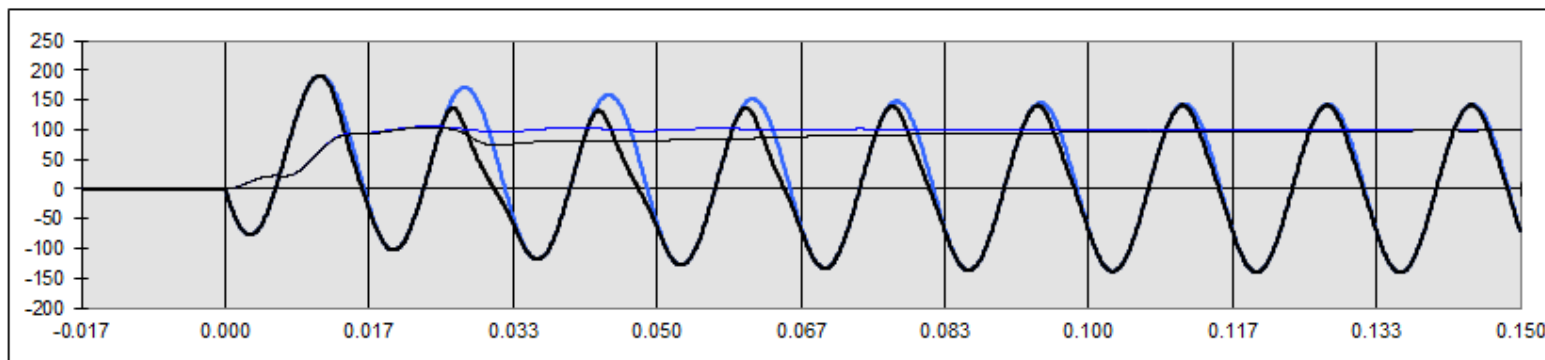

CT Performance: 400:5, C400, R=0.5, Offset = 0.75, 8000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	400	volts rms
Turns ratio = n2/1 =	N =	80	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.75	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.50	---
Symmetrical primary fault current =	Ip =	8,000	amps rms

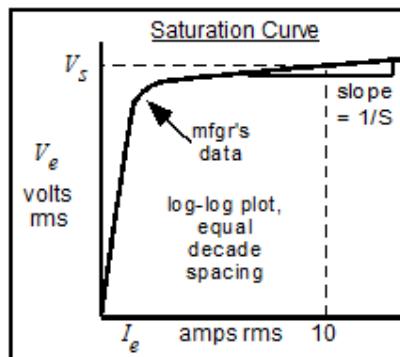


CALCULATED:

Rt = Total burden resistance = Rw + Rb =	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs =	1.501	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous ie versus lambda curve: ie = A * I ^S :	3.83E-03	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: Ideal (blue) and actual (black) secondary current in amps vs time in seconds.

Thin lines: Ideal (blue) and actual (black) secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

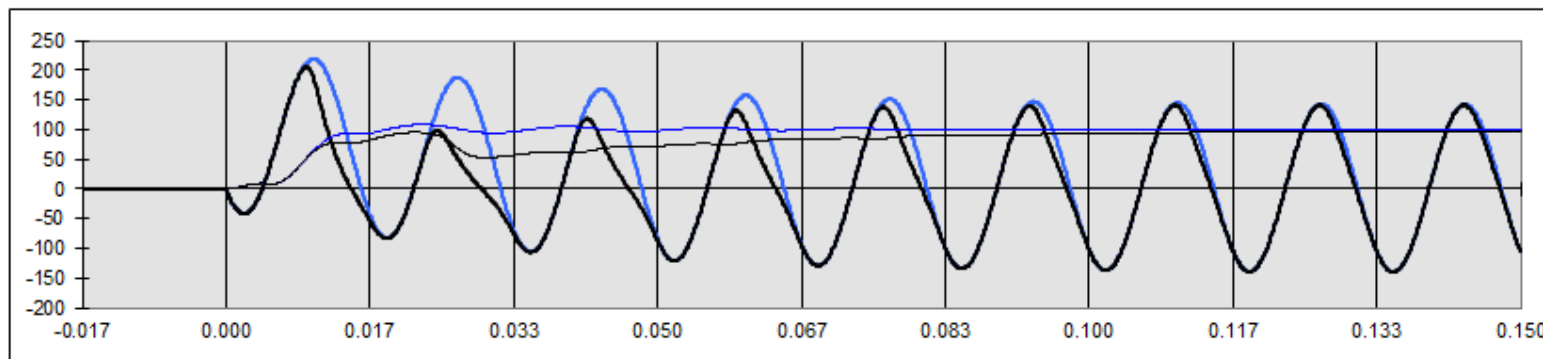


To determine the effect of saturation on a particular digital relay one must have "models" for the blocks shown below:

http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip

CT Performance: 400:5, C400, R=0.75, Offset = 0.75, 8000A

INPUT PARAMETERS:

	ENTER:		
Inverse of sat. curve slope =	S =	22	---
RMS voltage at 10A exc. current =	Vs =	400	volts rms
Turns ratio = n2/1=	N =	80	---
Winding resistance =	Rw =	0.300	ohms
Burden resistance =	Rb =	0.500	ohms
Burden reactance =	Xb =	0.500	ohms
System X/R ratio =	XoverR =	12.0	---
Per unit offset in primary current =	Off =	0.75	-1<Off<1
Per unit remanence (based on Vs) =	λrem	0.75	---
Symmetrical primary fault current =	Ip =	8,000	amps rms

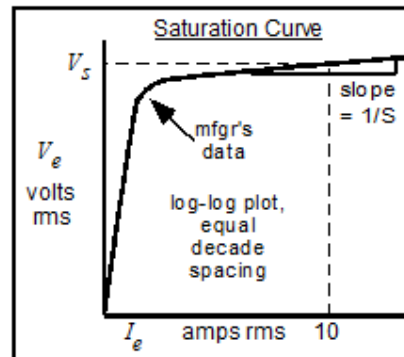


CALCULATED:

Rt = Total burden resistance = $R_w + R_b =$	0.800	ohms
pf = Total burden power factor =	0.848	---
Zb = Total burden impedance =	0.943	ohms
Tau1 = System time constant =	0.032	seconds
Lamsat = Peak flux-linkages corresponding to Vs	1.501	Wb-turns
ω = Radian freq =	376.99	rad/s
RP = Rms-to-peak ratio =	0.34584	
A = Coefficient in instantaneous i_e versus lambda curve: $i_e = A * I^S$:	3.83E-03	---
dt = Time step =	0.000083	seconds
Lb = Burden inductance =	0.00133	henries

Thick lines: Ideal (blue) and actual (black) secondary current in amps vs time in seconds.



Thin lines: Ideal (blue) and actual (black) secondary current extracted fundamental rms value, using a simple DFT with a one-cycle window.

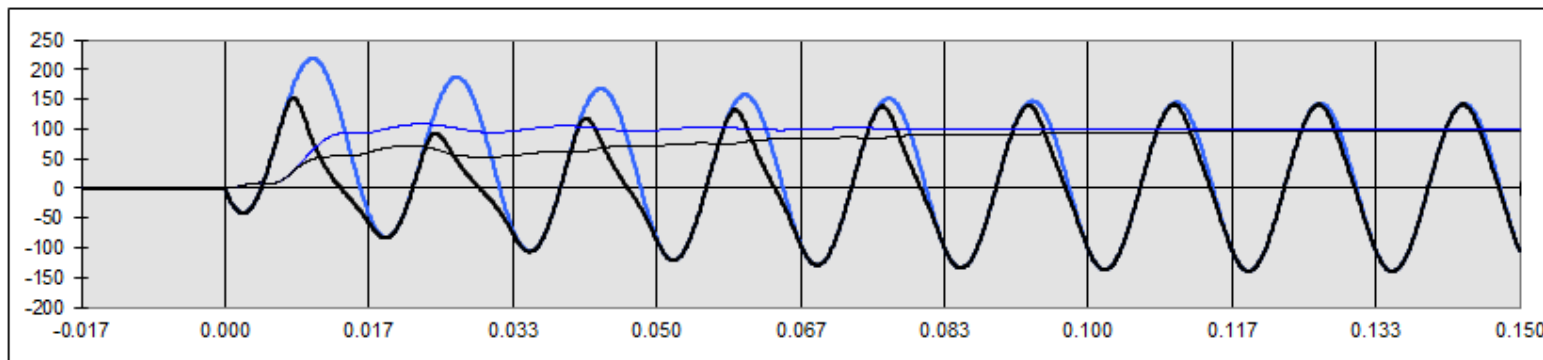



To determine the effect of saturation on a particular digital relay, you must have "hard data" for the blocks shown below.

http://www.pes-psrc.org/Reports/CT_SAT%2010-01-03.zip



Through Current: Perfect Replication

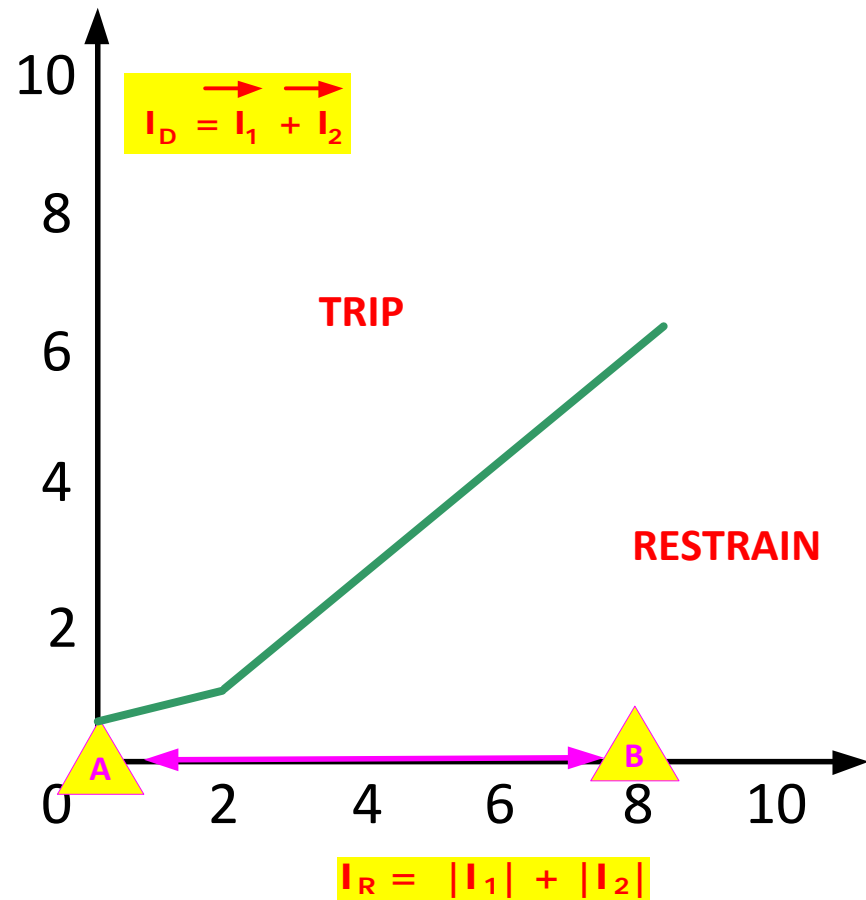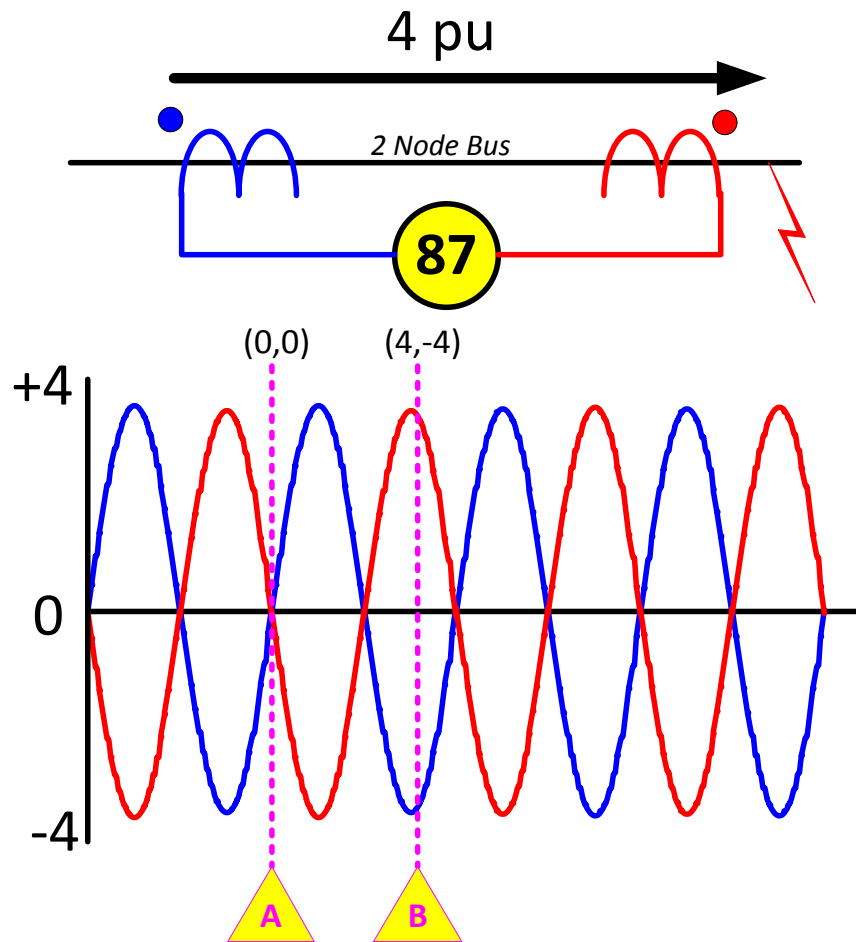



Through Current: Imperfect Replication

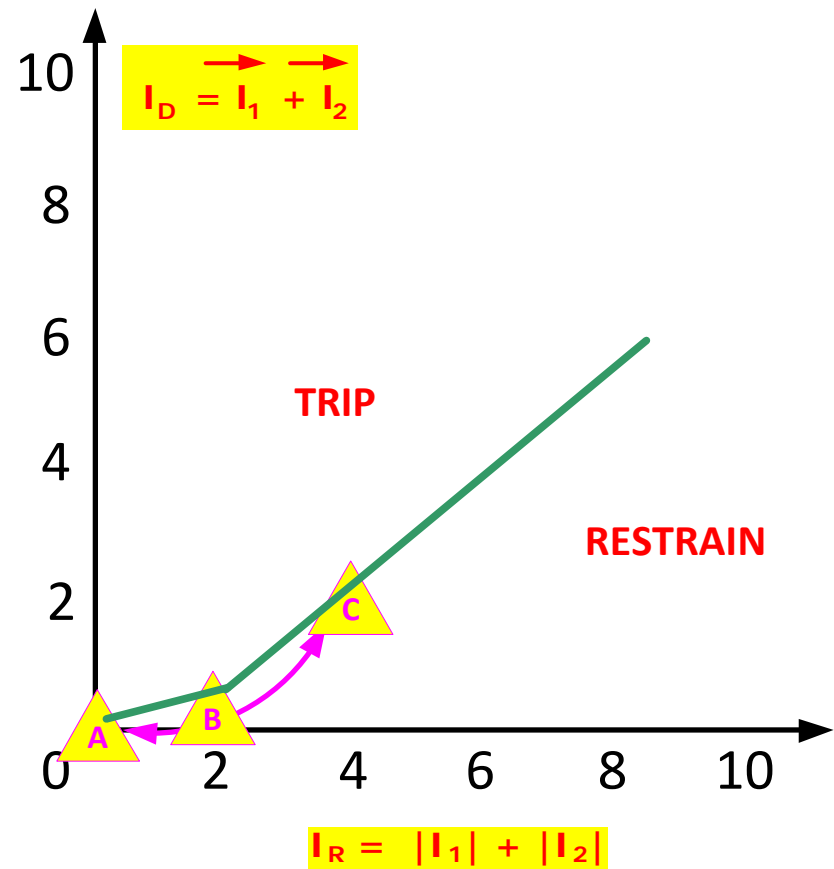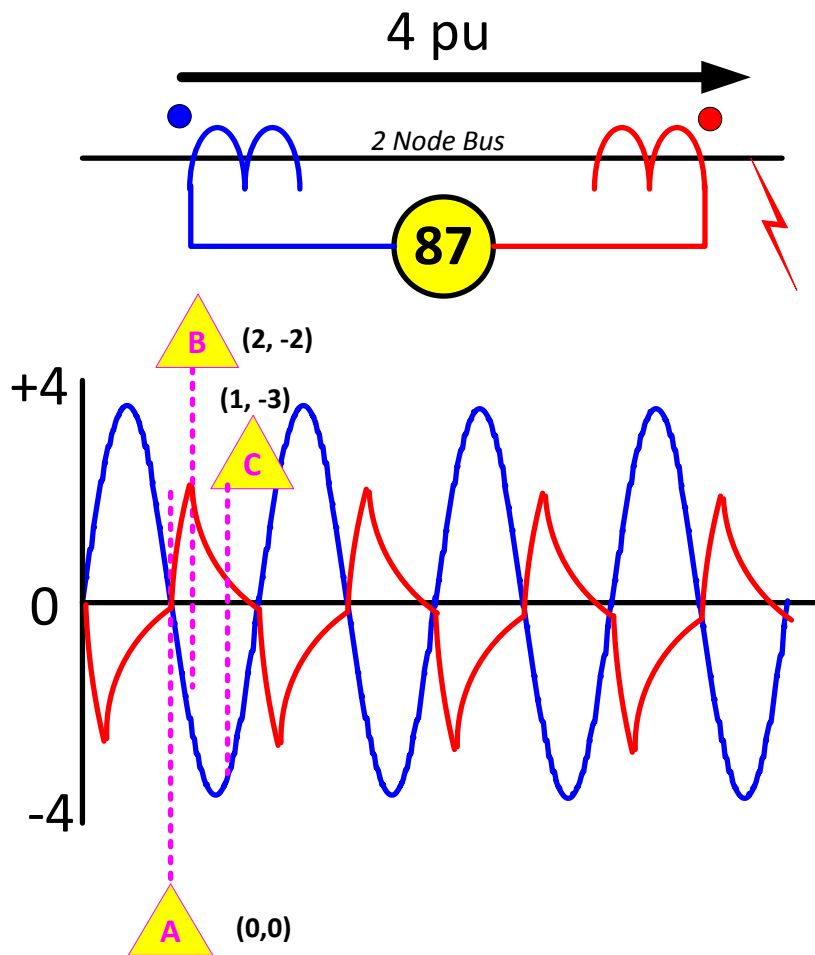

Internal Fault: Perfect Replication

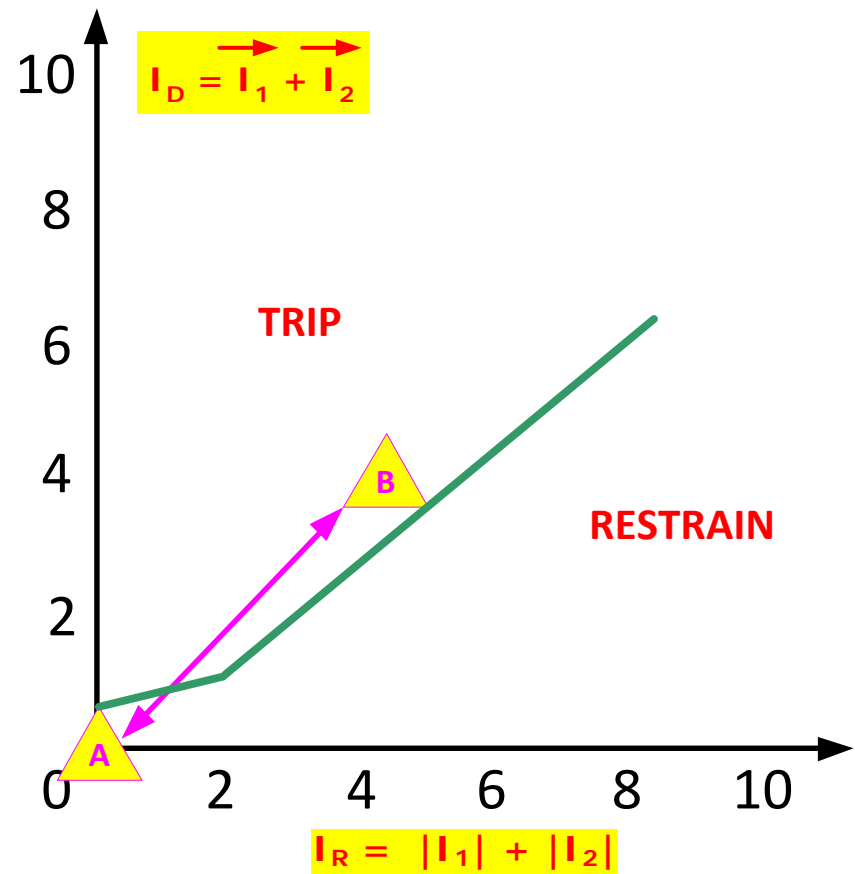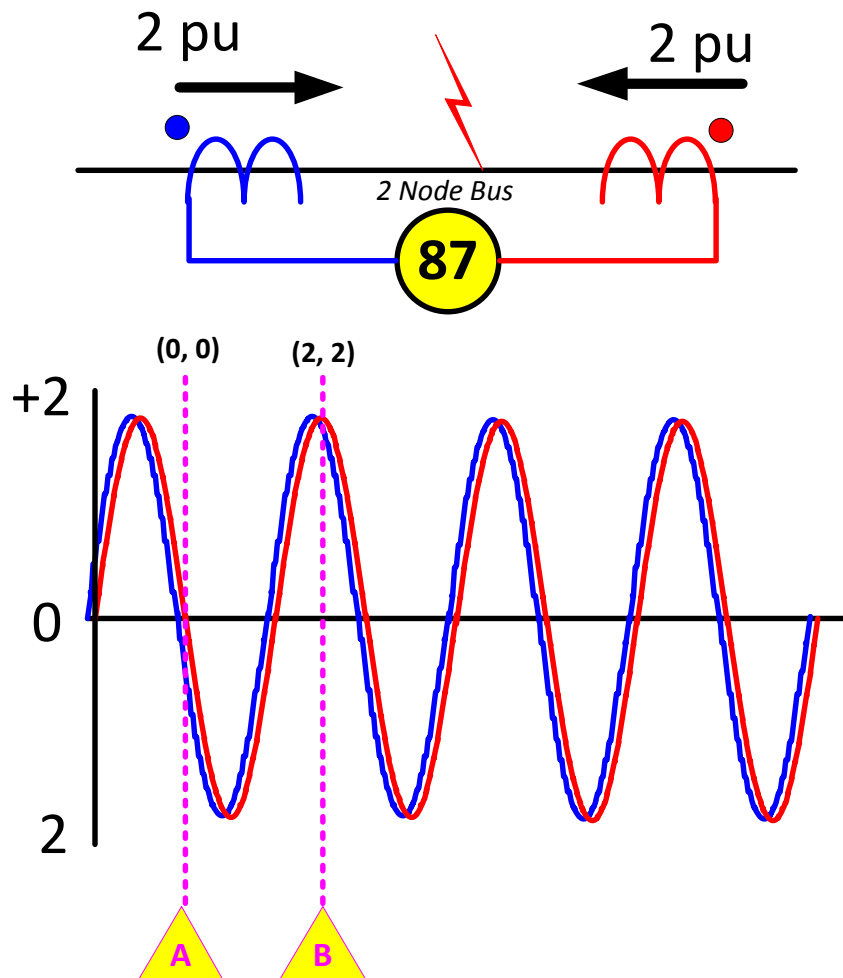


Internal Fault: Imperfect Replication

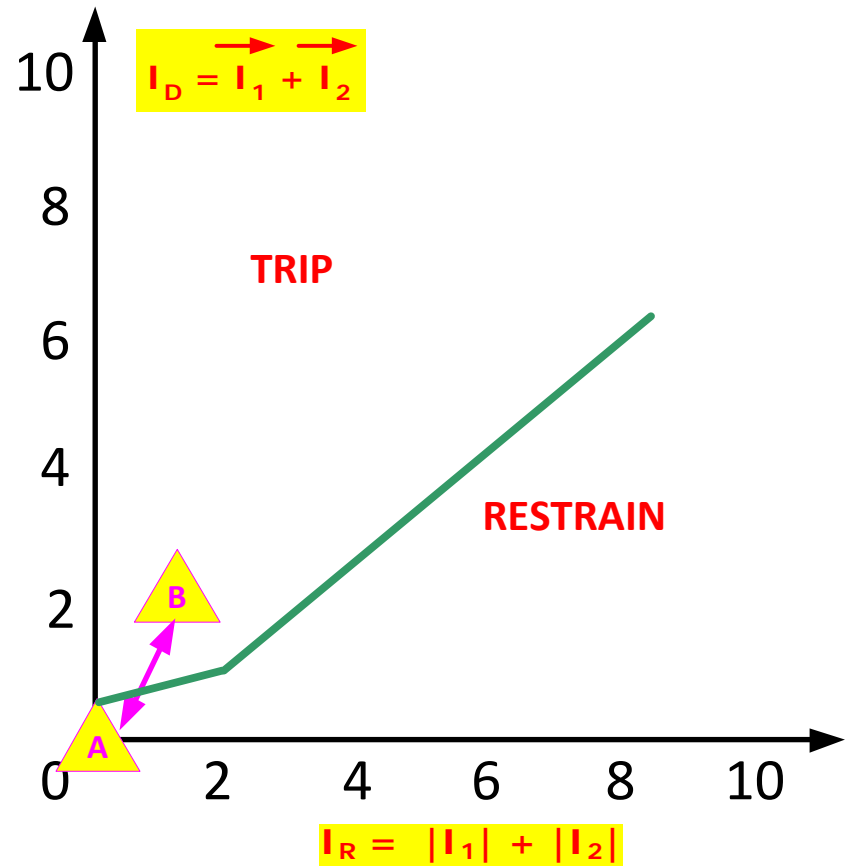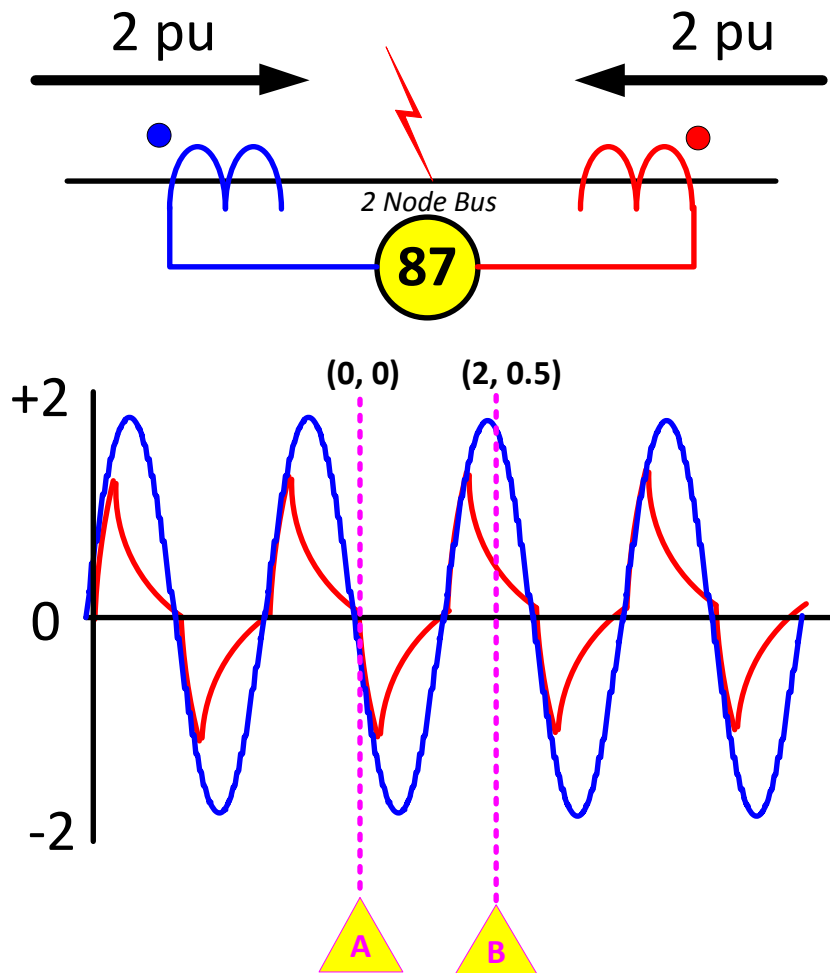

Application Considerations: Paralleling Sources

- When paralleling sources for differential protection, beware!
- Paralleled sources (not load, specifically sources) have different saturation characteristics and present the differential element input with corrupt values
- Consider through-fault on bus section
 - One CT saturates, the other does not
 - Result: Input is presented with “false difference” due to combining of CTs from different sources outside of relay

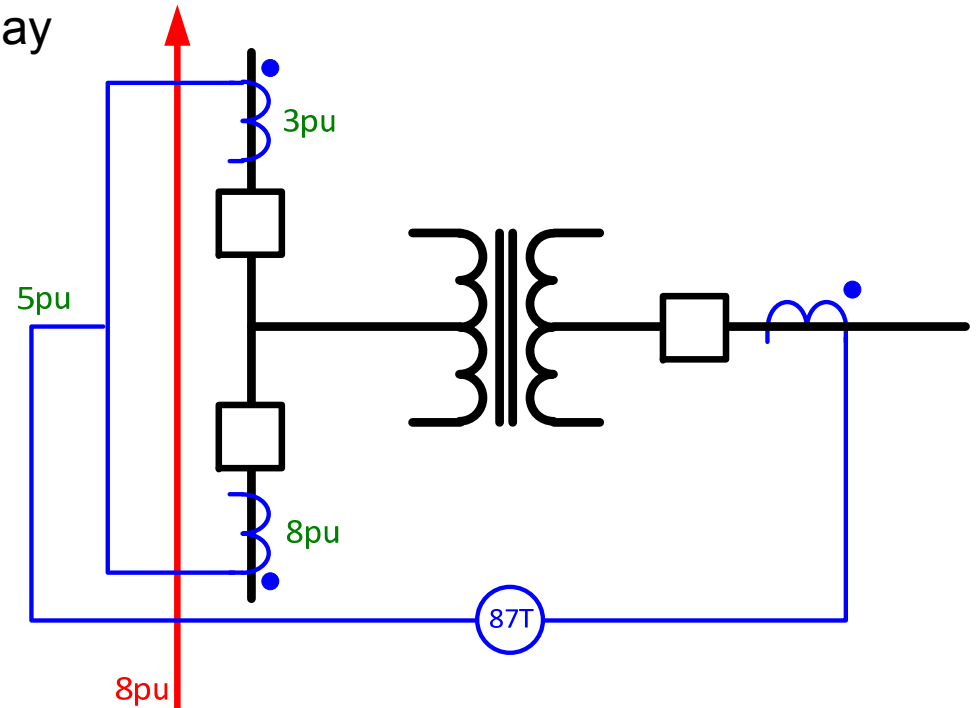


Classical Differential Compensation

- **CT ratios must be selected to account for:**
 - Transformer ratios
 - If delta or wye connected CTs are applied
 - Delta increases ratio by 1.73

- **Delta CTs must be used to filter zero-sequence current on wye transformer windings**

Classical Differential Compensation

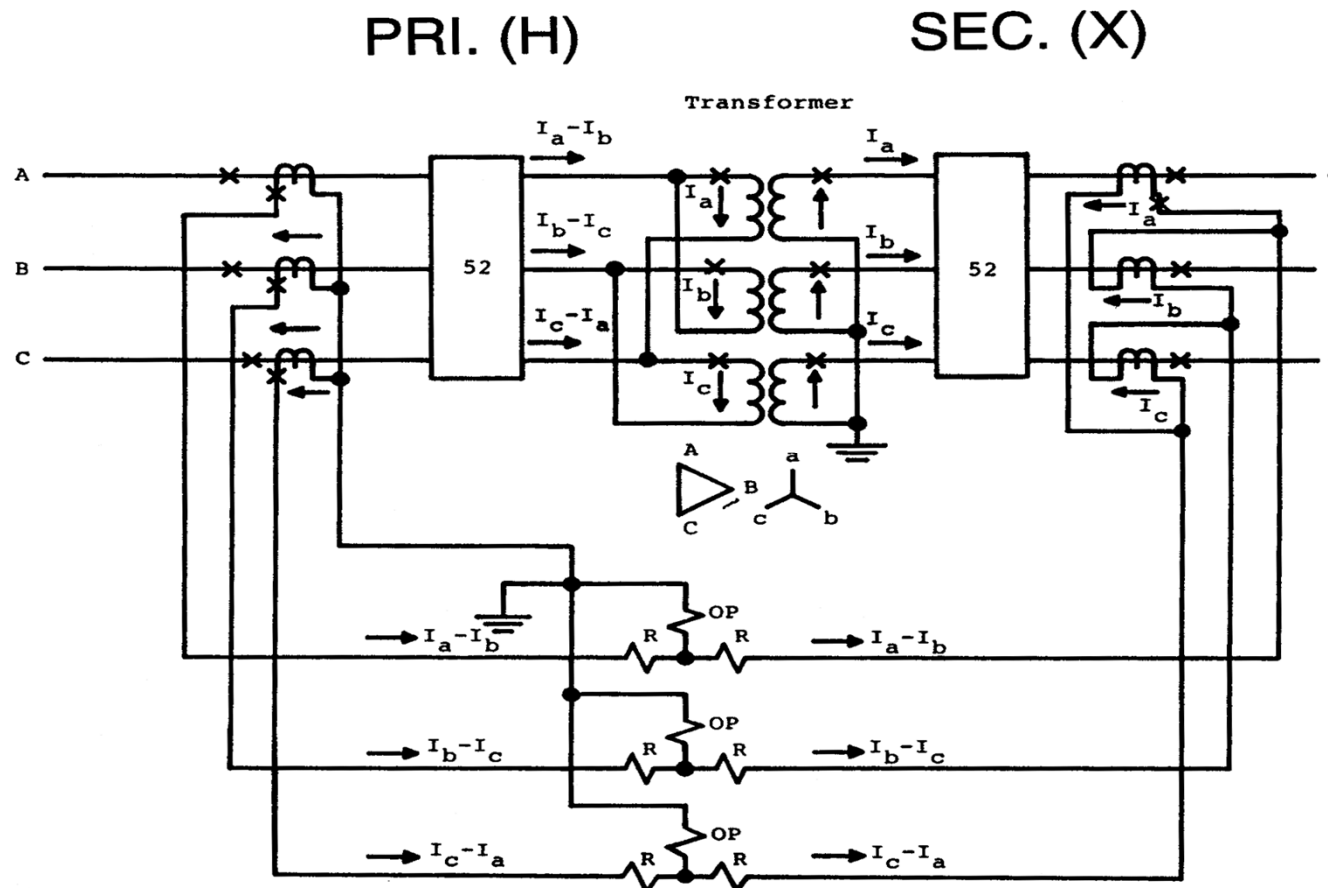

“Dab” as polarity of “A” connected to non-polarity of “B”


Bushing Nomenclature

- H1, H2, H3
 - Primary Bushings
- X1, X2, X3
 - Secondary Bushings



Wye-Wye	H1 and X1 at zero degrees
Delta-Delta	H1 and X1 at zero degrees
Delta-Wye	H1 lead X1 by 30 degrees
Wye-Delta	H1 lead X1 by 30 degrees

Angular Displacement

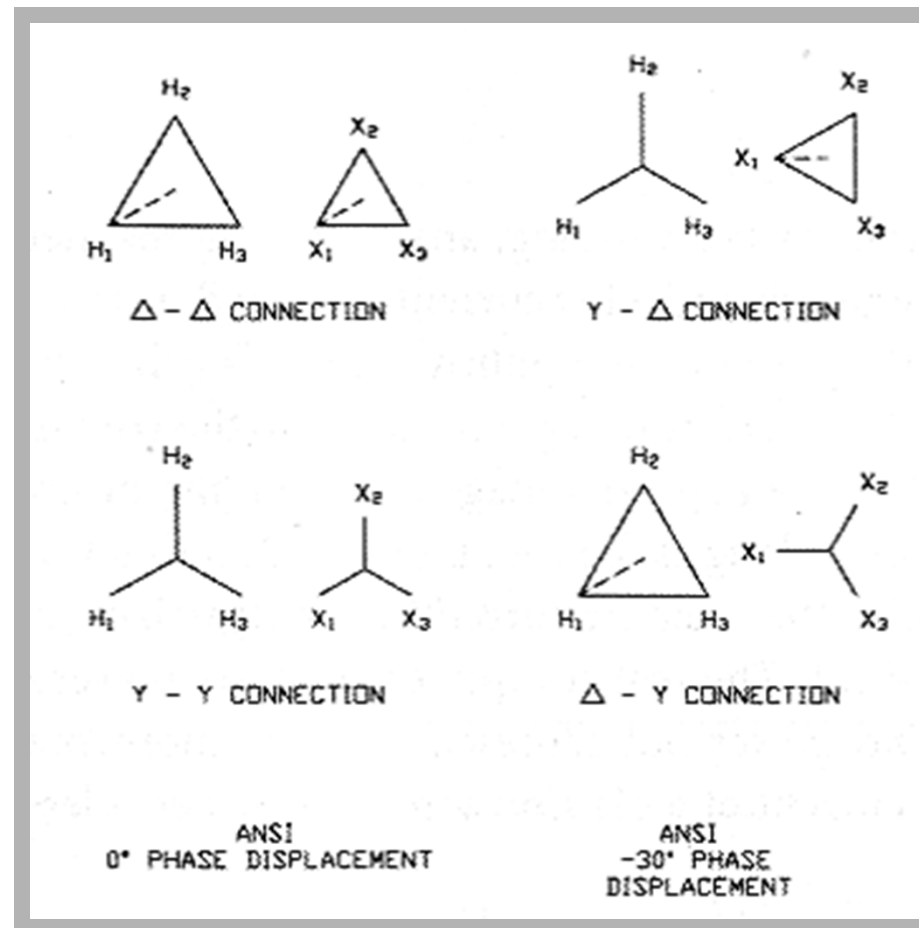


- ANSI Y-Y & Δ-Δ @ 0°
- ANSI Y-Δ & Δ-Y @ H₁ lead X₁ by 30° *or* X₁ lag H₁ by 30°

Winding Types and Impacts

- **Wye-Wye**
 - Cheaper than 2 winding if autobank
 - Conduct zero-sequence between circuits
 - Provides ground source for secondary circuit
- **Delta-Delta**
 - Blocks zero-sequence between circuits
 - Does not provide a ground source
- **Delta-Wye**
 - Blocks zero-sequence between circuits
 - Provides ground source for secondary circuit
- **Wye-Delta**
 - Blocks zero-sequence between circuits
 - Does not provide a ground source for secondary circuit


Winding Types

□ Wye-Wye

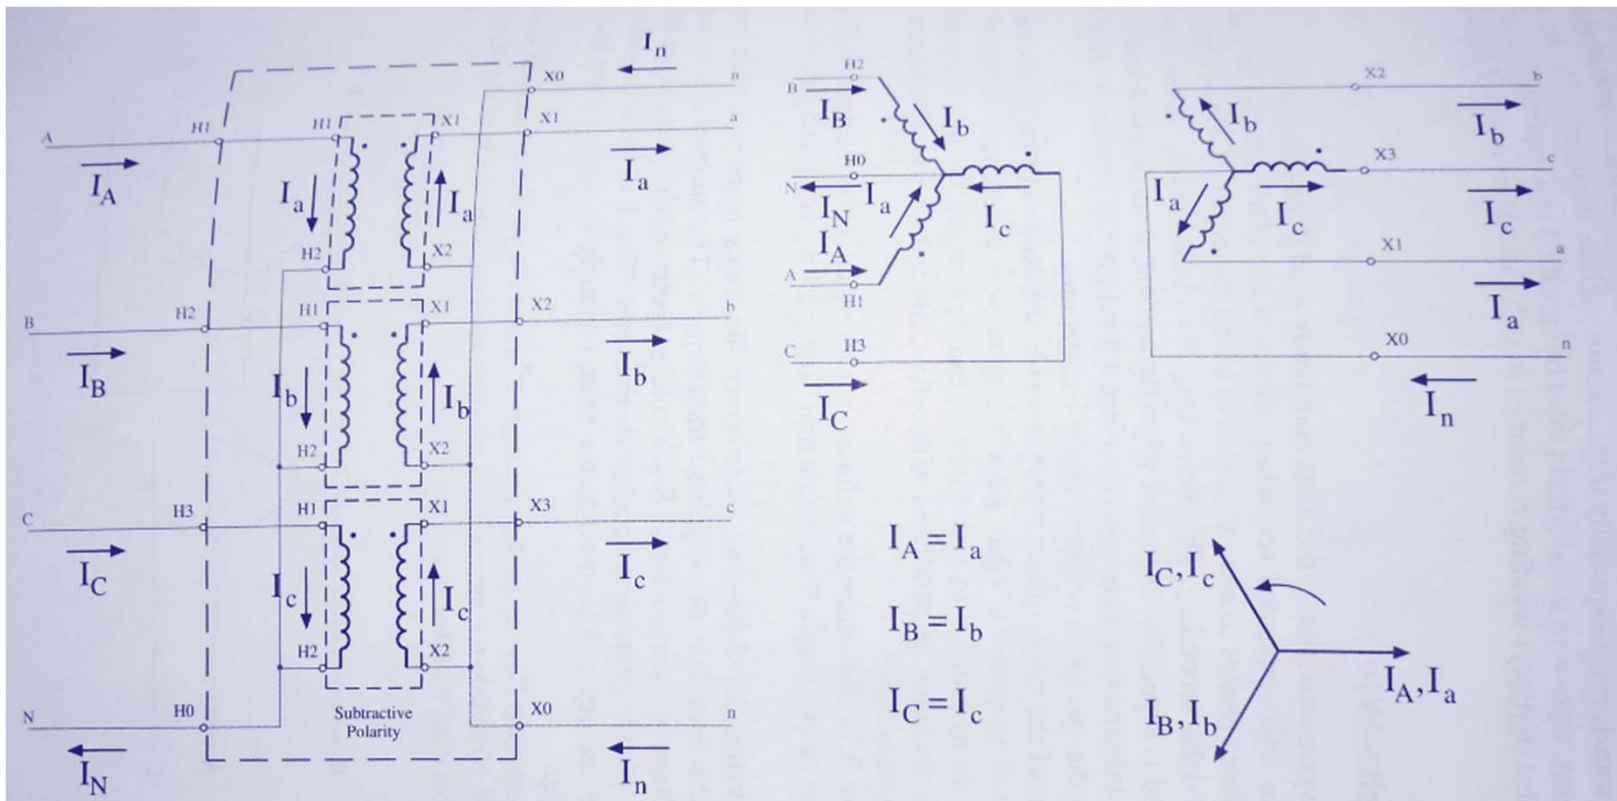


Winding Types

□ Delta-Delta

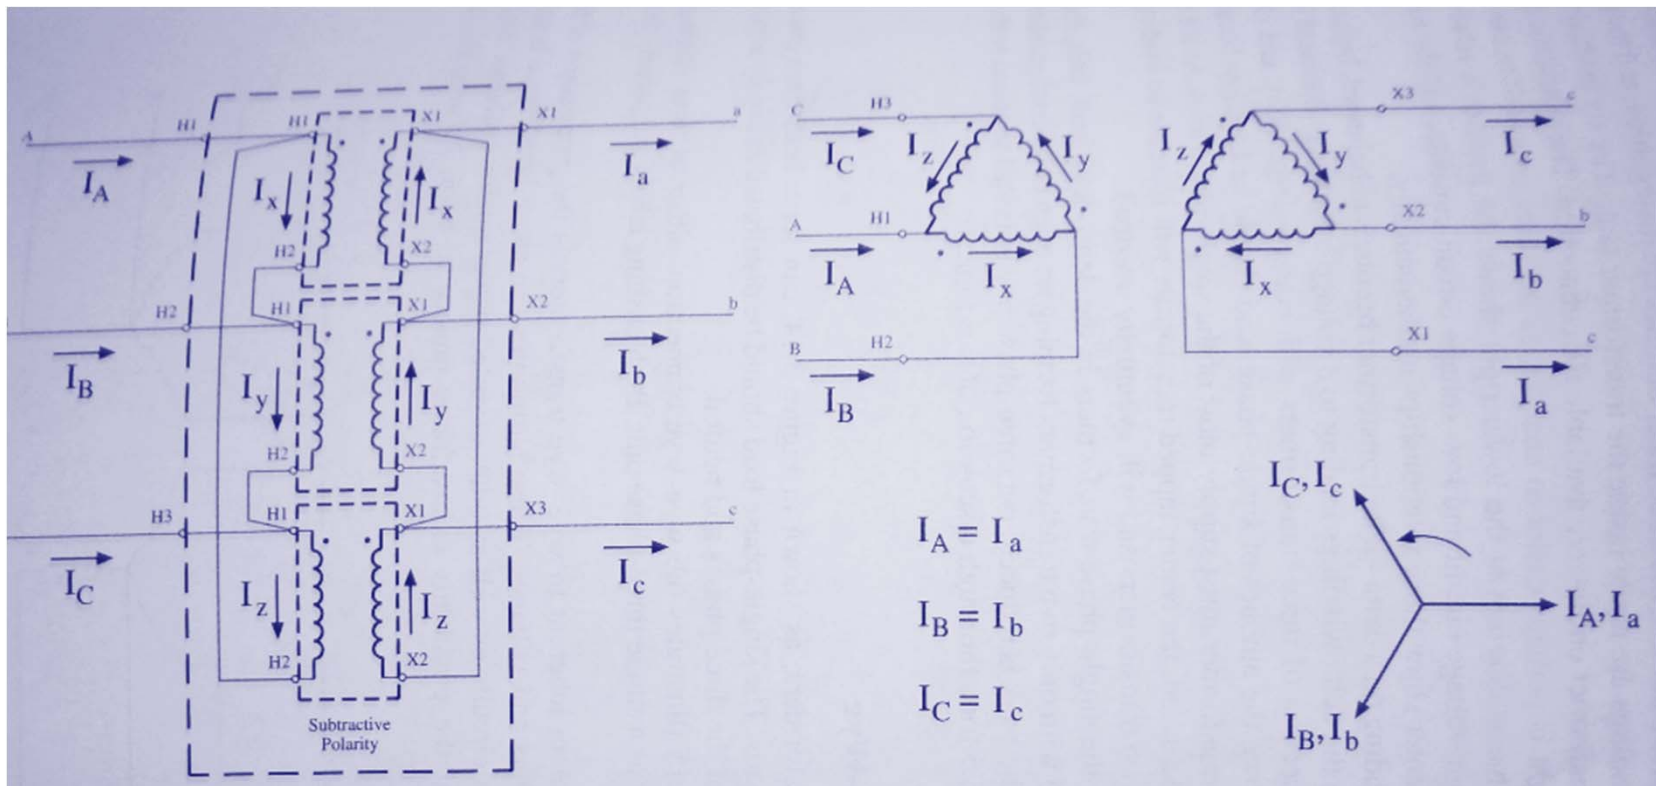


Winding Types

□ Delta-Wye

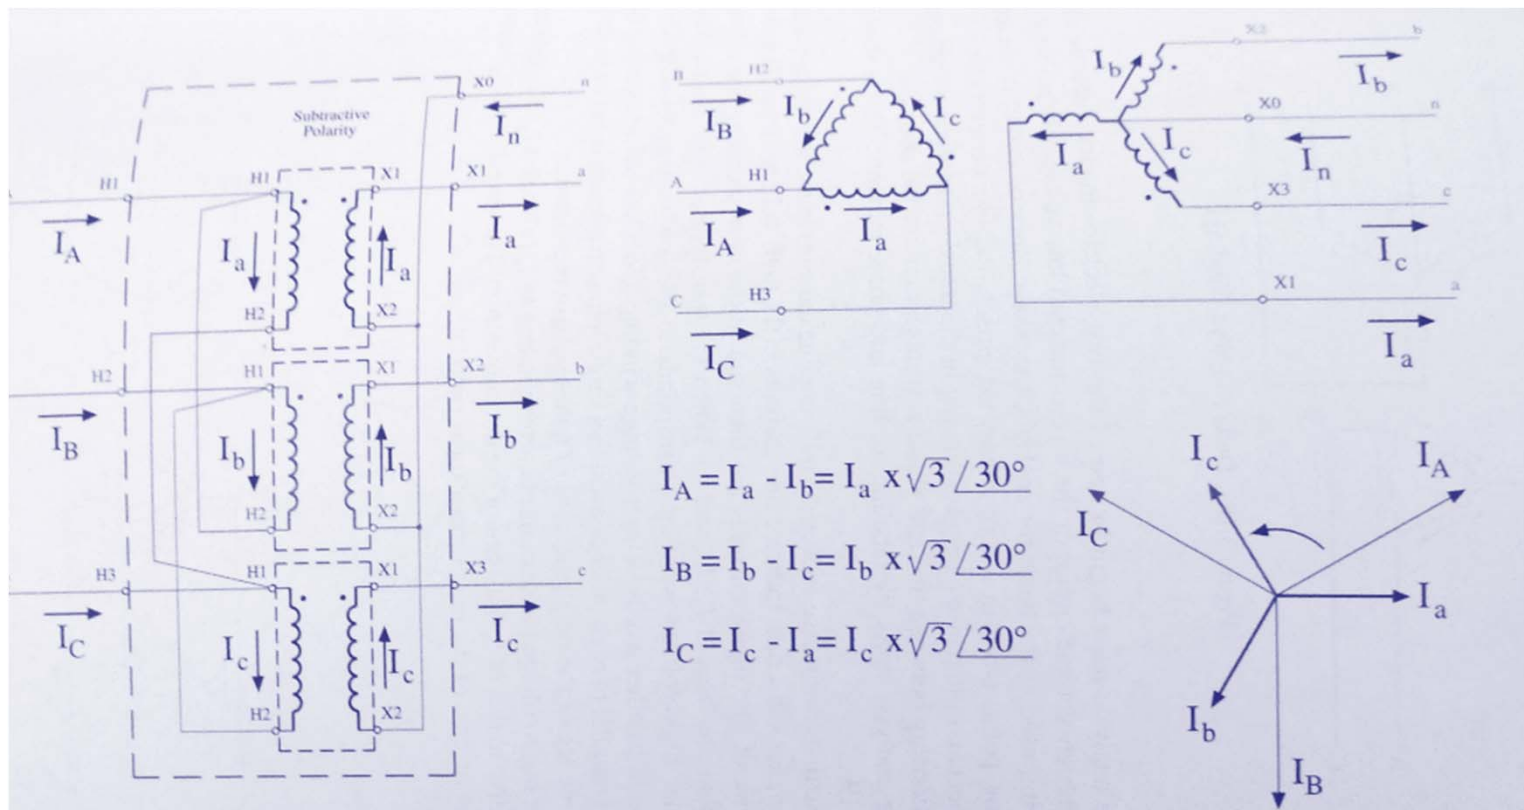

Winding Types

□ Wye-Delta

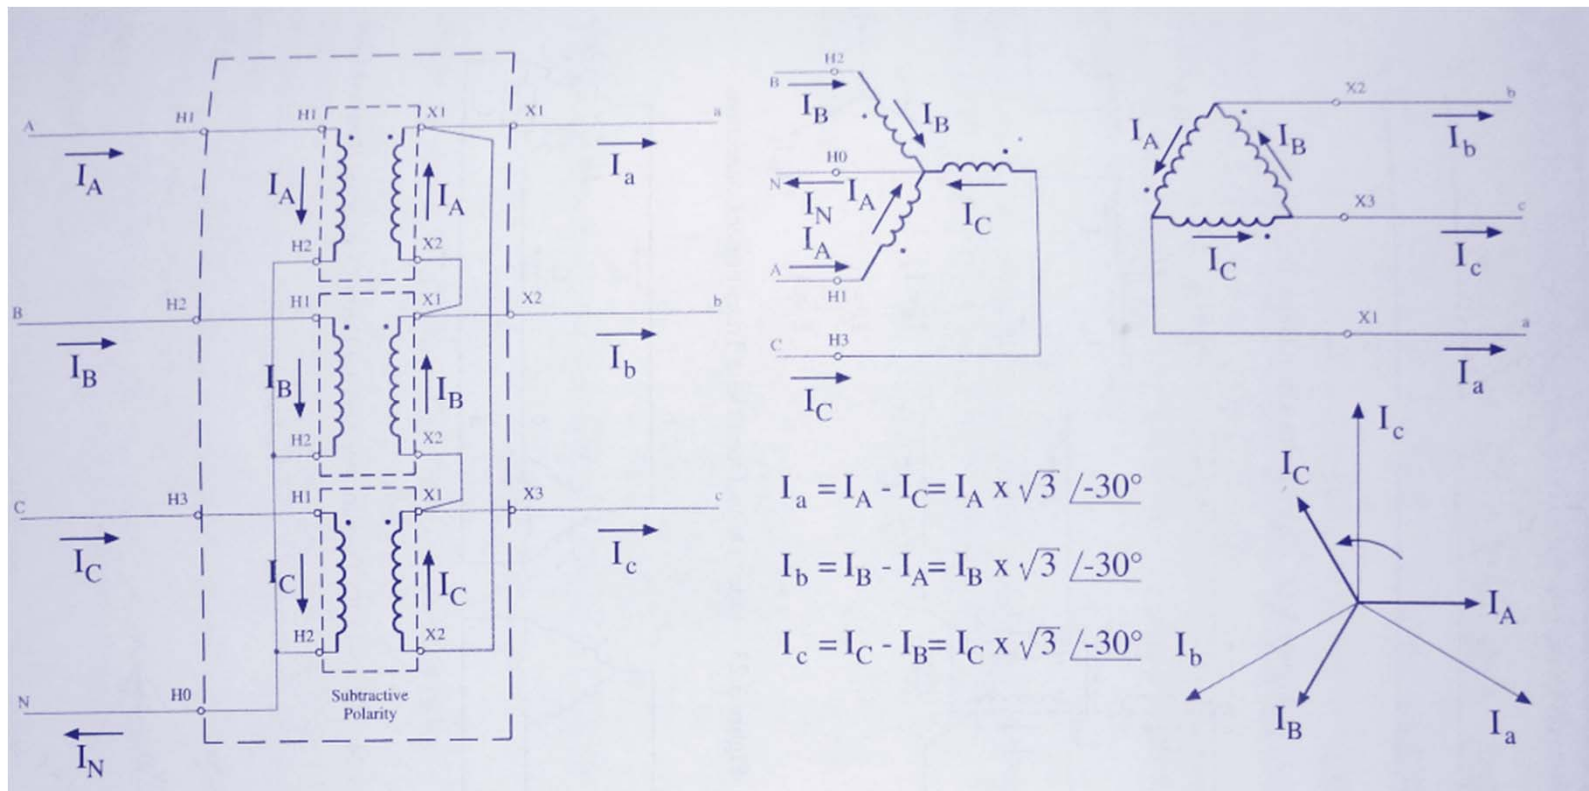


Compensation in Digital Relays


- Transformer ratio
- CT ratio
- Phase angle shift and $\sqrt{3}$ factor due to delta/wye connection
- Zero-sequence current filtering for wye windings so the differential quantities do not occur from external ground faults

Phase Angle Compensation in Numerical Relays


- Phase angle shift due to transformer connection in electromechanical and static relays is accomplished using appropriate connection of the CTs
- The phase angle shift in Numerical Relays can be compensated in software for any transformer with zero or 30° increments
- All CTs may be connected in WYE which allows the same CTs to be used for both metering and backup overcurrent functions
- Some numerical relays will allow for delta CTs to accommodate legacy upgrade applications

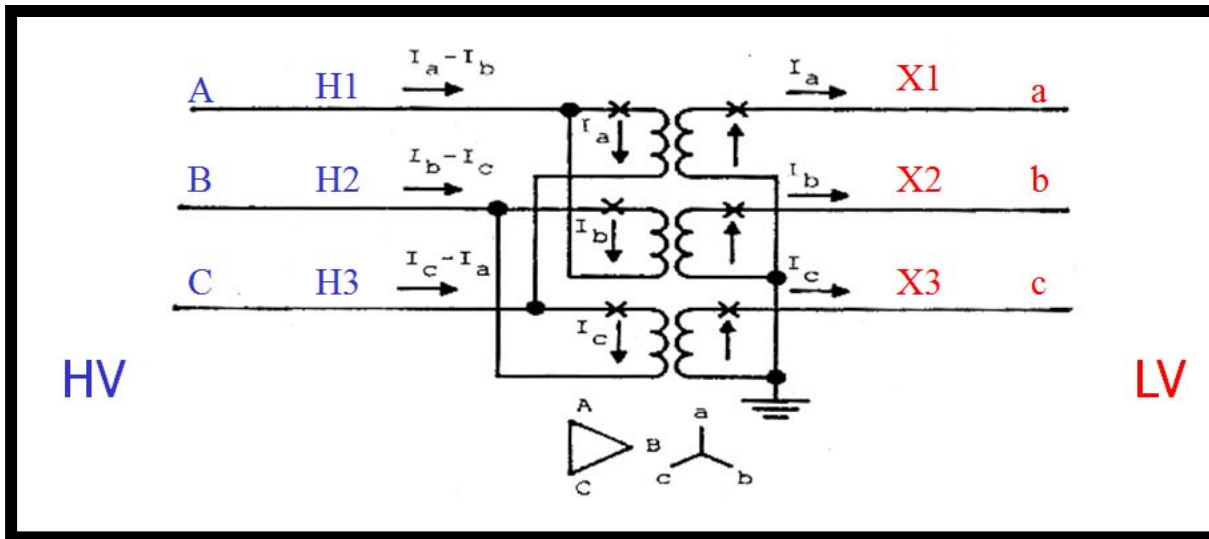


- Delta High Side, Wye Low Side
- High Lead Low by 30°
- Delta-Wye
- Delta (ab)
- Dy1
 - Dyn1

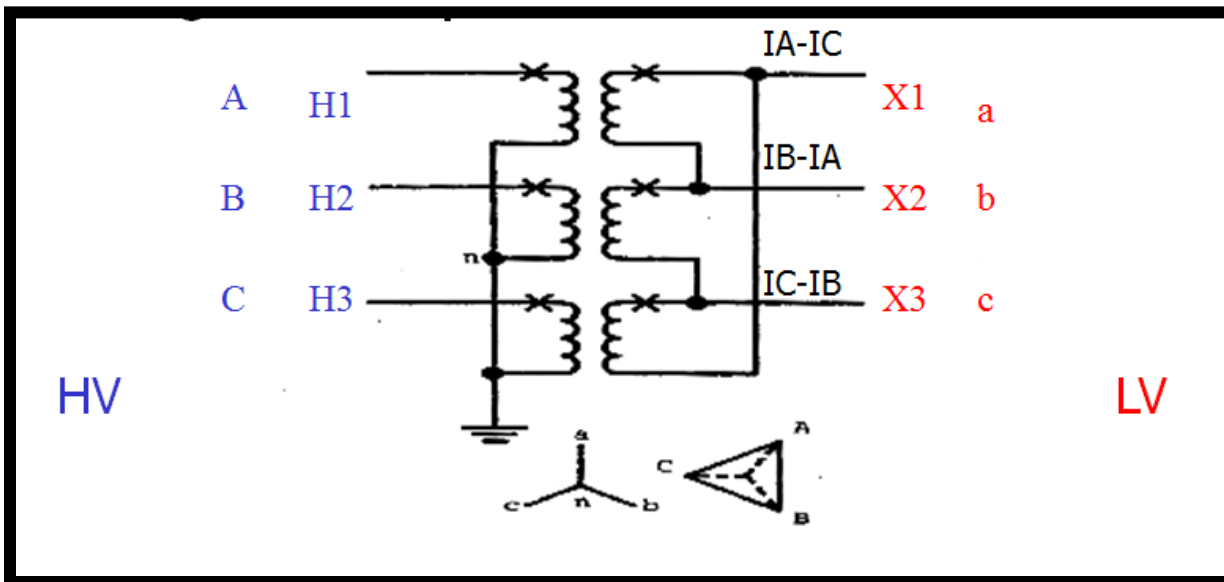

- Wye High Side, Delta Low Side
- High Lead Low by 30°
- Wye-Delta
- Delta (ac)
- Yd1
 - YNd1

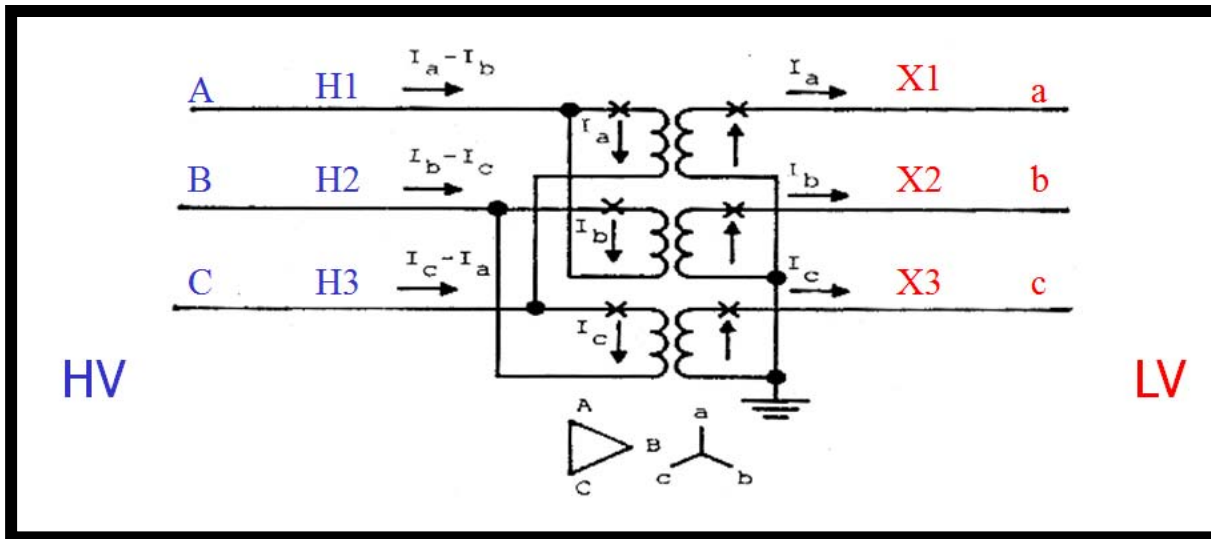

- Delta High Side, Wye Low Side
- High Lead Low by 30°
- Delta-Wye
- Delta (ab)
- Dy1
 - Dyn1

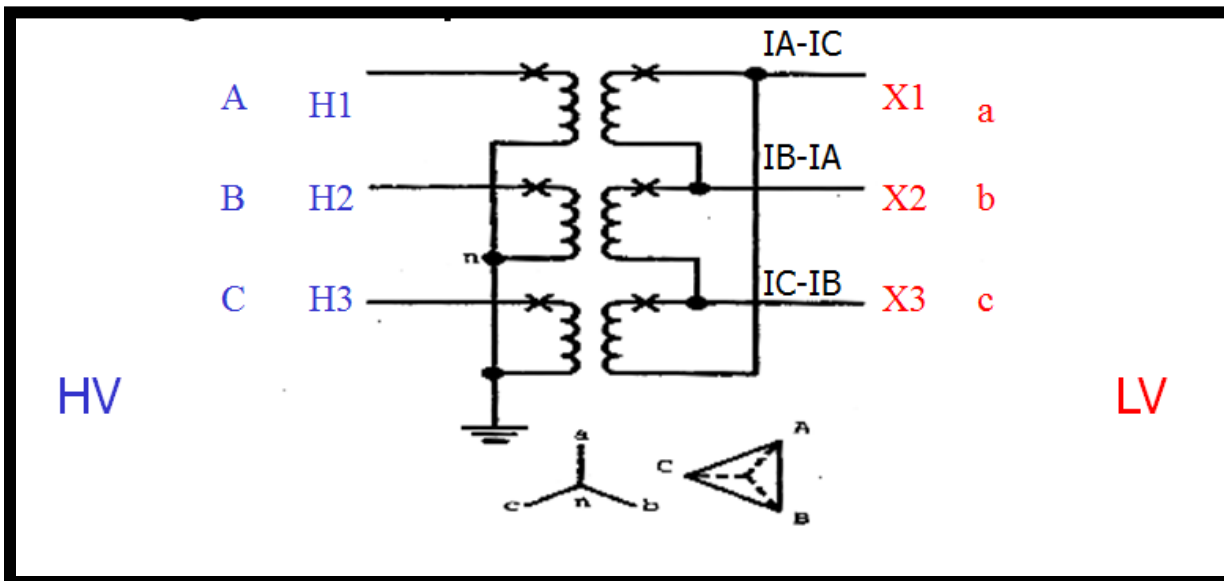

- Wye High Side, Delta Low Side
- High Lead Low by 30°
- Wye-Delta
- Delta (ac)
- Yd1
 - YNd1

IEC Connection	Description	Symbol	Description	Symbol	Input Value	Symbol
Yy0			YY		Y Y 0 0	
Dd0			Dac Dac		Dac Dac 1 1	
Yd1			Y Dac		Y Dac 0 1	
Yd11			Y Dab		Y Dab 0 11	
Dy1			Dab Y		Dab Y 11 0	
Dy11			Dac Y		Dac Y 1 0	
Yd5			Y Inverse Dab		Y Inverse Dab 0 5	
Dy5			Dac Inverse Y		Dac Inverse Y 1 5	
Dd10			Dac Dab		Dac Dab 1 11	
Dz2			Dab Custom		Dab Wye 11 1	

Transformer Connection Bushing Nomenclature

Y-Y ANSI

Δ-Δ ANSI


Y-Δ ANSI

Δ-Y ANSI



- ANSI follows “zero phase shift”, or “high lead low by 30°”
- IEC designations use “low lags high by increments of 30° phase shift
- IEC uses various phase shifts in 30 increments
 - 30, 60, 90, 180, etc.

Digital Relay Application

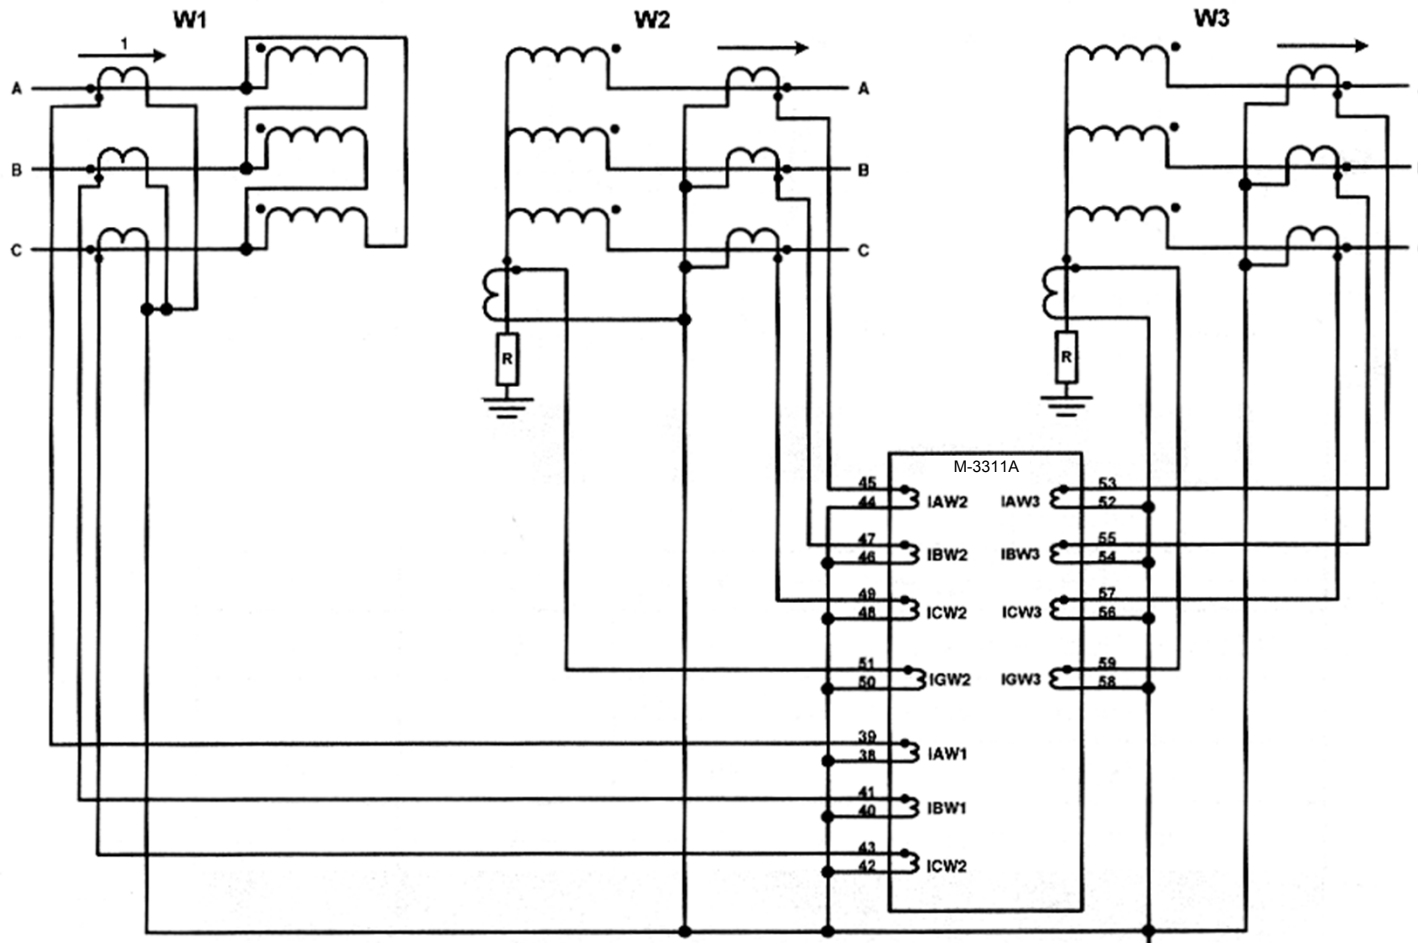

All WYE CTs shown

Benefits of Wye CTs

- Phase segregated line currents
 - Individual line current oscillography
 - Currents may be easily used for overcurrent protection and metering
 - Easier to commission and troubleshoot
 - Zero sequence elimination performed by calculation

NOTE:

- For protection upgrade applications where one wants to keep the existing wiring, the relay must:
 - Accept either delta or wye CTs
 - For delta CTs, recalculate the phase currents for overcurrent functions


Application Adaptation

- **Challenge:** To be able to handle ANY combination of transformer winding arrangements *and* CT connection arrangements
- **Strategy:** Use a menu that contains EVERY possible combination
 - Set W1's transformer winding configuration and CT configuration
 - Set W2's transformer winding configuration and CT configuration
 - Set W3's transformer winding configuration and CT configuration
 - Set W4's transformer winding configuration and CT configuration

 - Standard or Custom Selection
 - Standard handles most arrangements, including all ANSI standard type
 - Custom allows any possible connections to be accommodated (Non-ANSI and legacy delta CTs)

 - Relay selects the proper currents to use, directly or through vector subtraction
 - Relay applies $\sqrt{3}$ factor if required
 - Relay applies zero sequence filtering if required

Compensation: Base Model

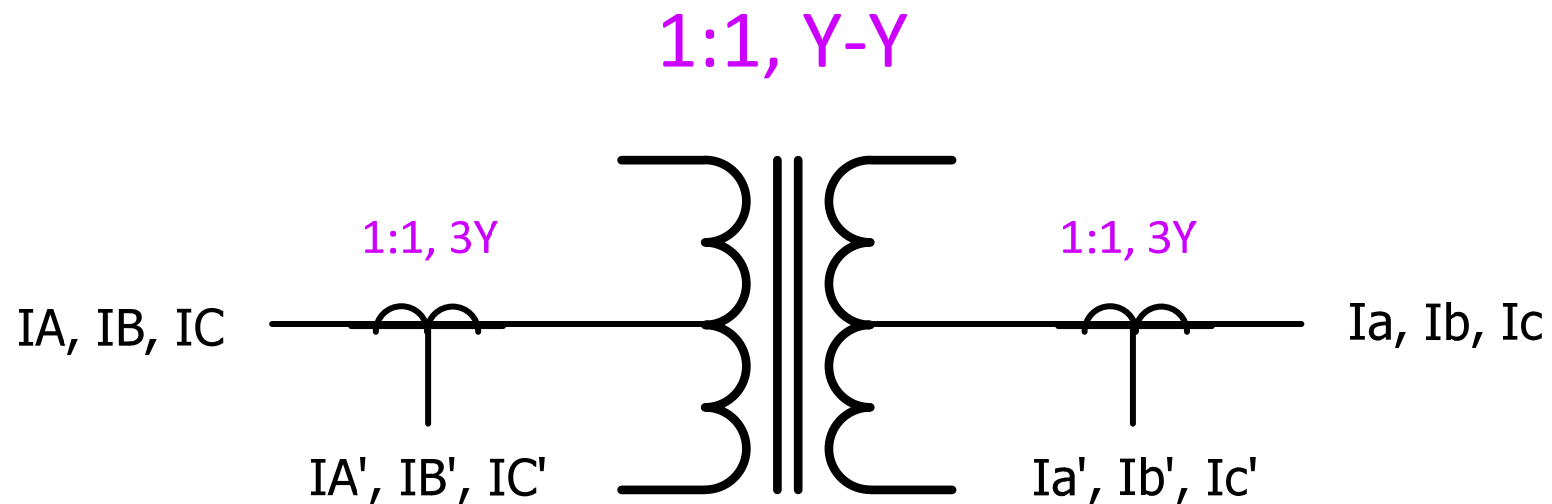


$$IA' = Ia'$$

$$IB' = Ib'$$

$$IC' = Ic'$$

Compensation: Change in CT Ratio

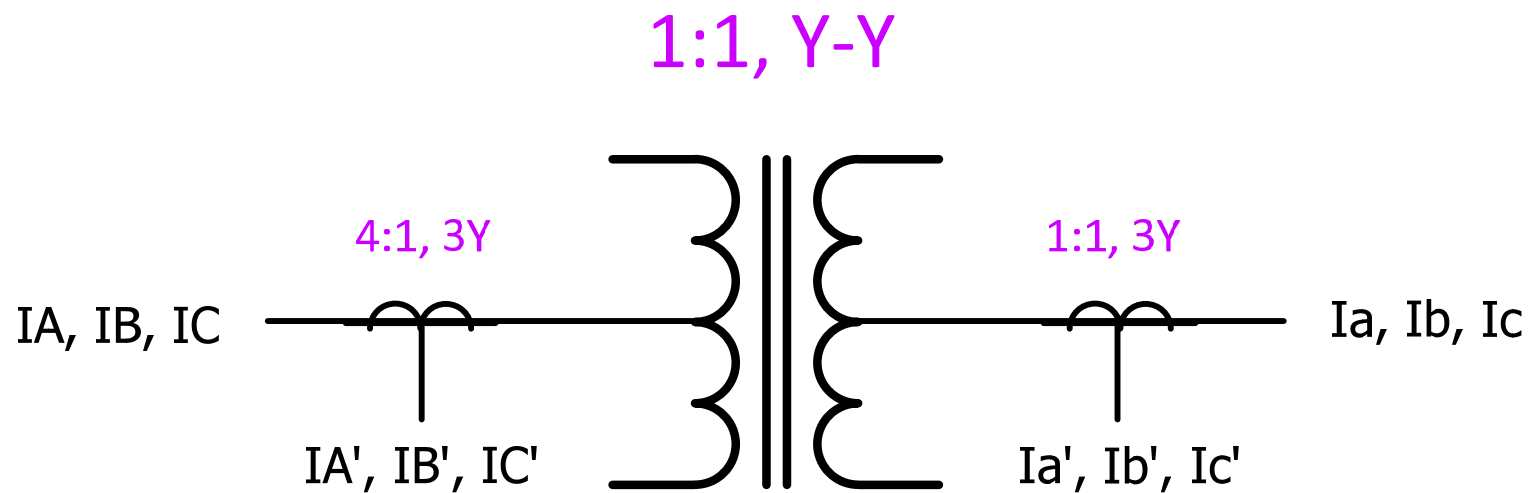


$$IA' = Ia' / 4$$

$$IB' = Ib' / 4$$

$$IC' = Ic' / 4$$

Compensation: Transformer Ratio

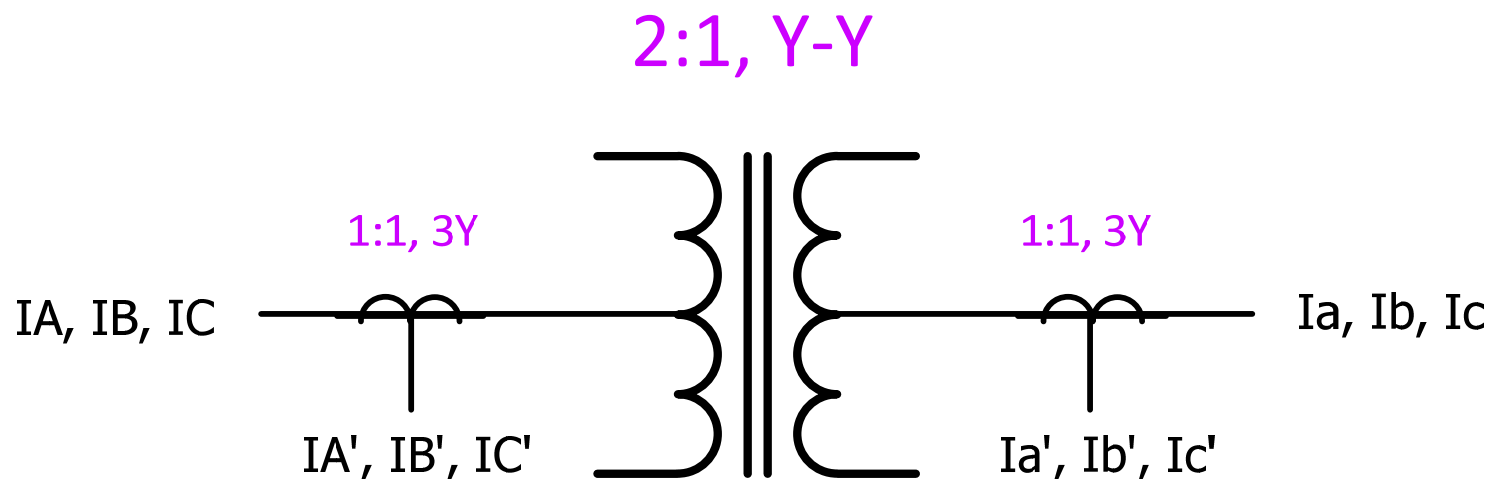


$$IA' = Ia' / 2$$

$$IB' = Ib' / 2$$

$$IC' = Ic' / 2$$

Compensation: Delta – Wye Transformation

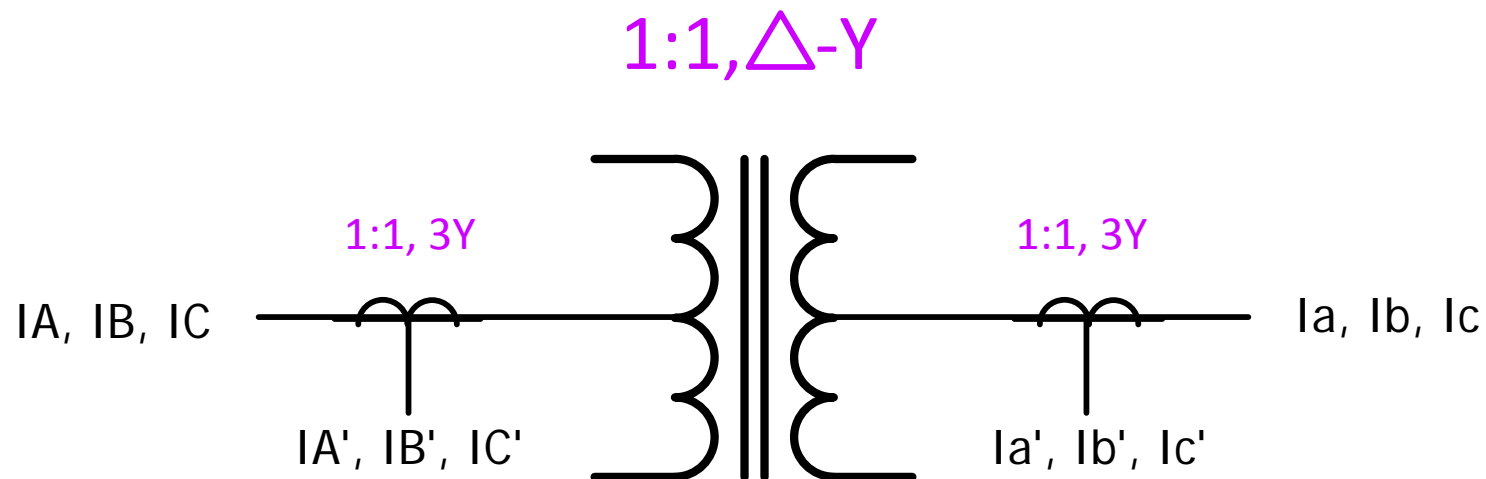

ANSI standard, high lead low by 30,
Current pairs are: IA-IB, IB-IC, IC-IA

$$IA' = Ia' * 1.73$$

$$IB' = Ib' * 1.73$$

$$IC' = Ic' * 1.73$$

Compensation: Zero-Sequence Elimination



$$3I_0 = [I_a + I_b + I_c]$$

$$I_0 = 1/3 * [I_a + I_b + I_c]$$

Used where filtering is required (Ex: Y/Y transformer).


Standard Application

- Set winding types
- 6 choices of configuration for windings and CTs

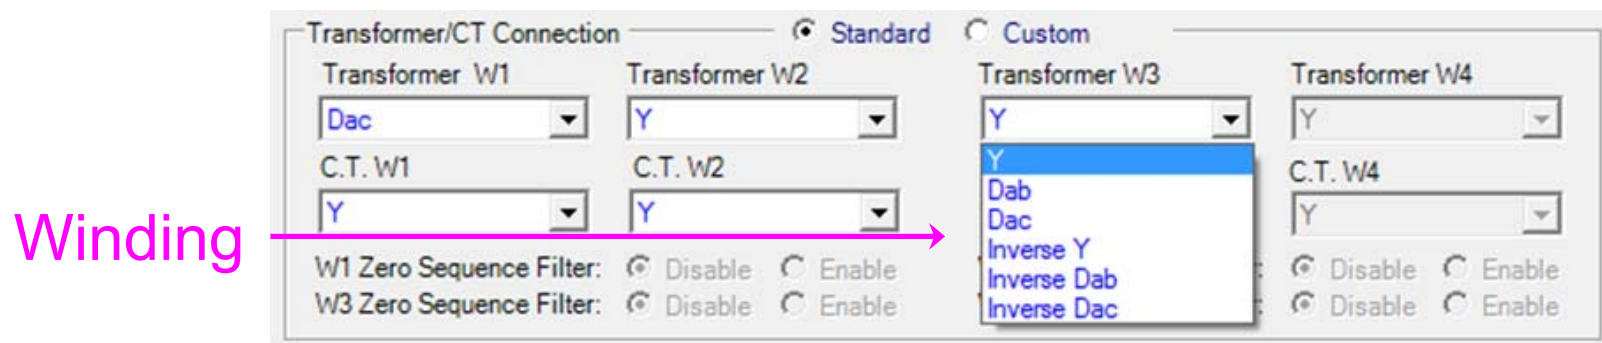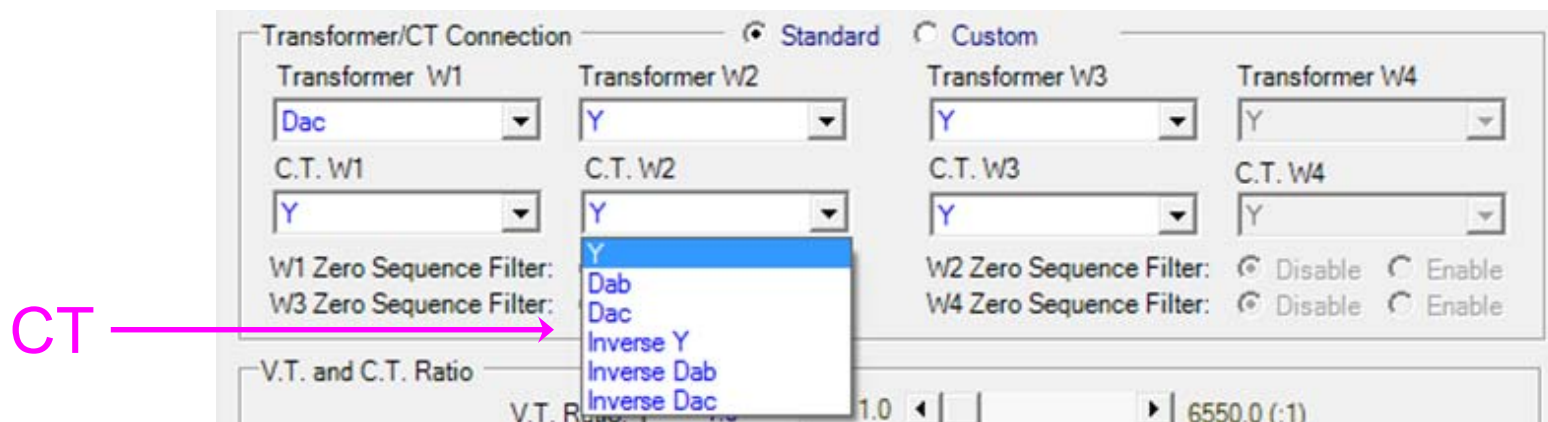


Custom Application: Accommodates any CTs and Windings

Winding

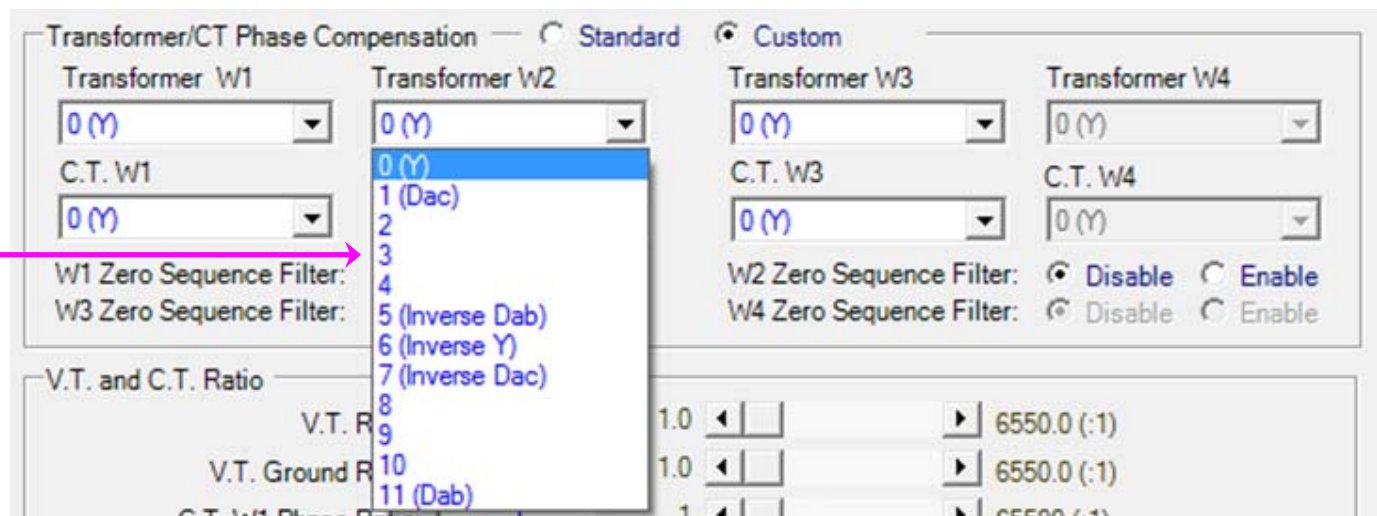

Custom Application: Accommodates any CTs and Windings

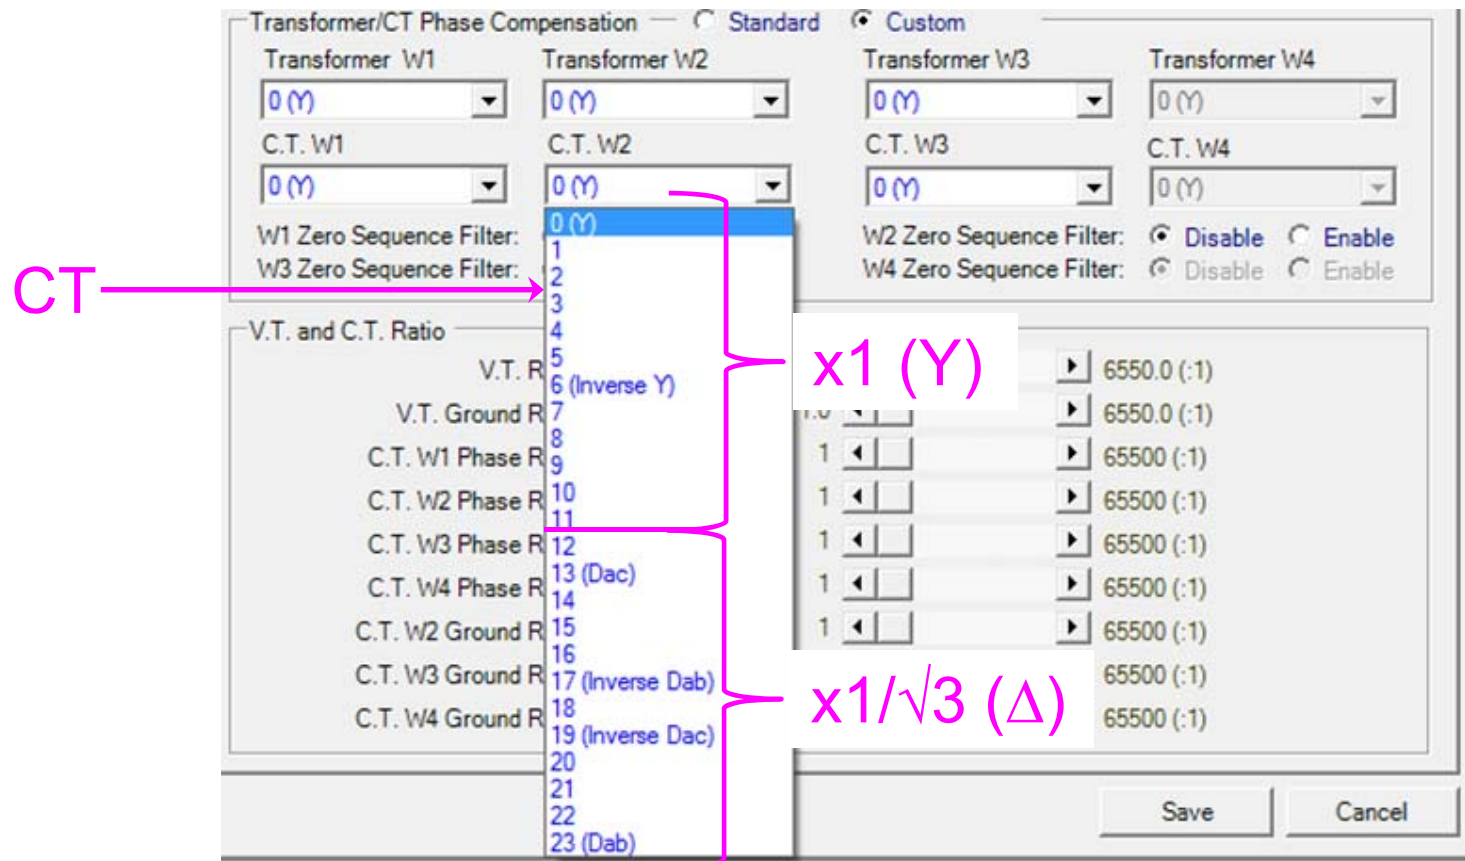


Core Construction and $3I_0$ Current

□ Unit transformer with Three-Legged Core


- With a 3 legged core, the zero-sequence current contribution of the transformer case may contribute as much as 20% to 25% zero-sequence current.
 - This is true regardless of if there is delta winding involved
 - Use $3I_0$ restraint on wye CTs even on the delta CT winding!!!
 - Use $3I_0$ restraint on wye CTs with wye windings!!!

Custom Application: Accommodates any CTs

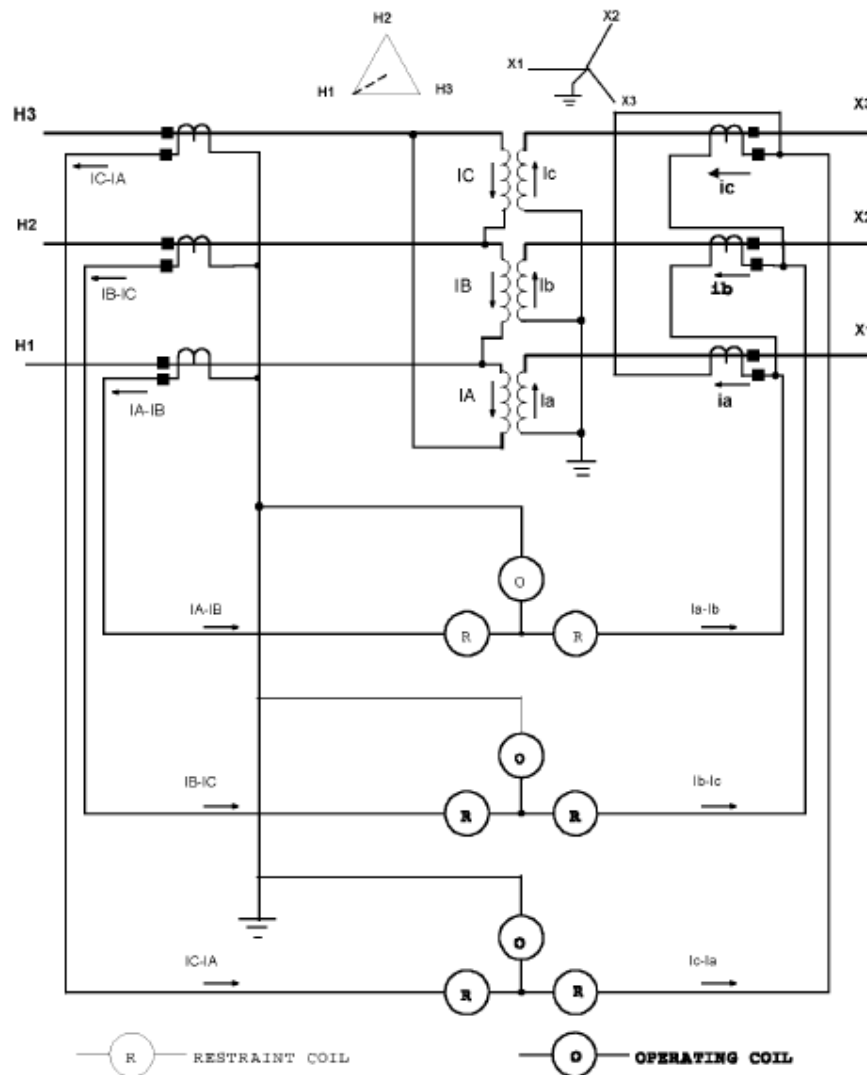


- Legacy Application
- Need to keep Delta CTs on WYE side of transformer

Custom Application: Accommodates any CTs

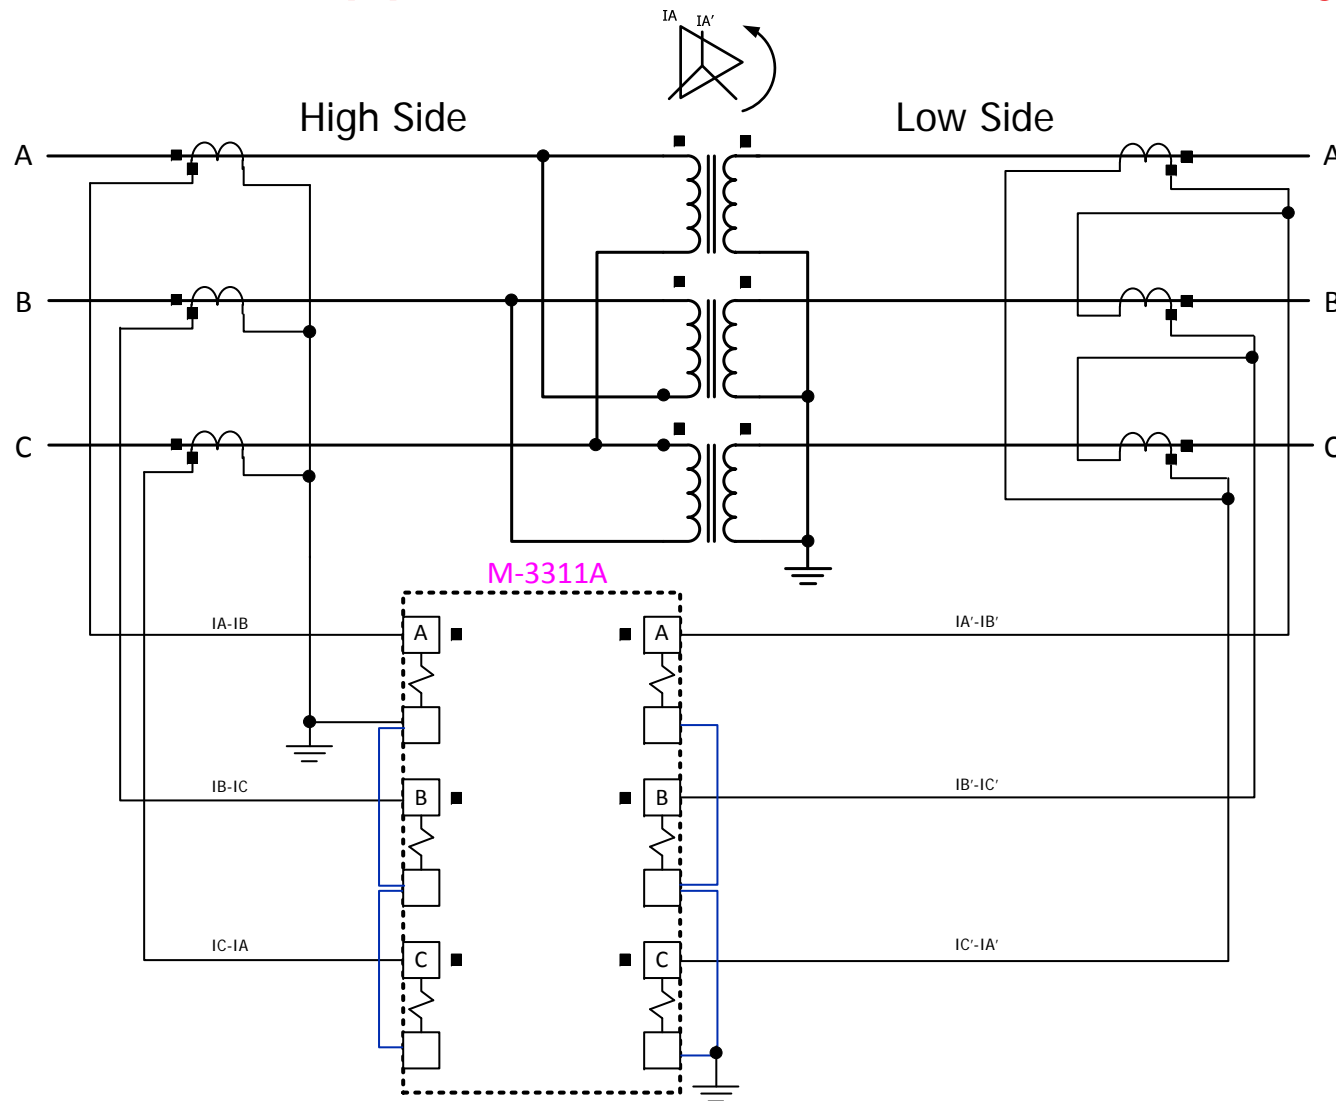

- Legacy Application
- Need to keep Delta CTs on WYE side of transformer


Relay Custom Application

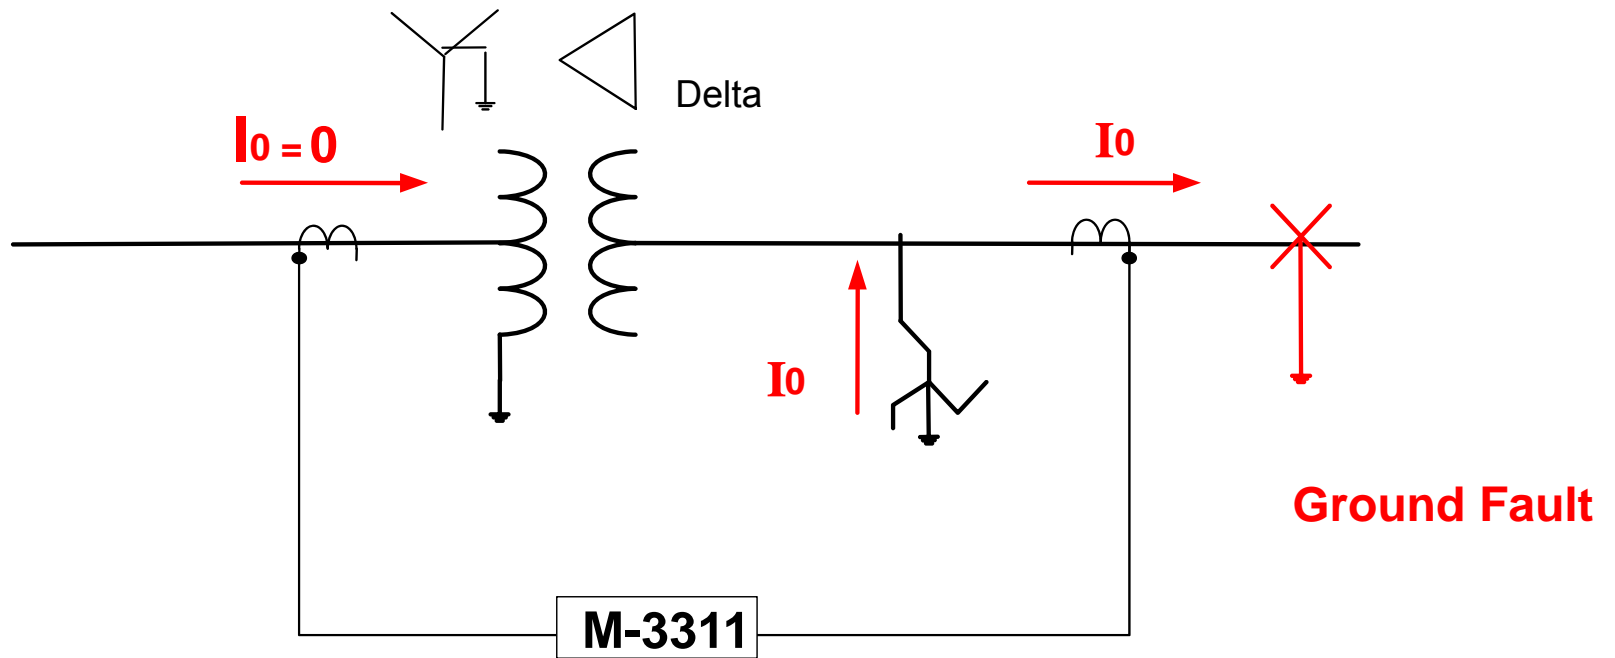

Winding Types

□ Zig-Zag

- Provides Ground Source for Ungrounded systems

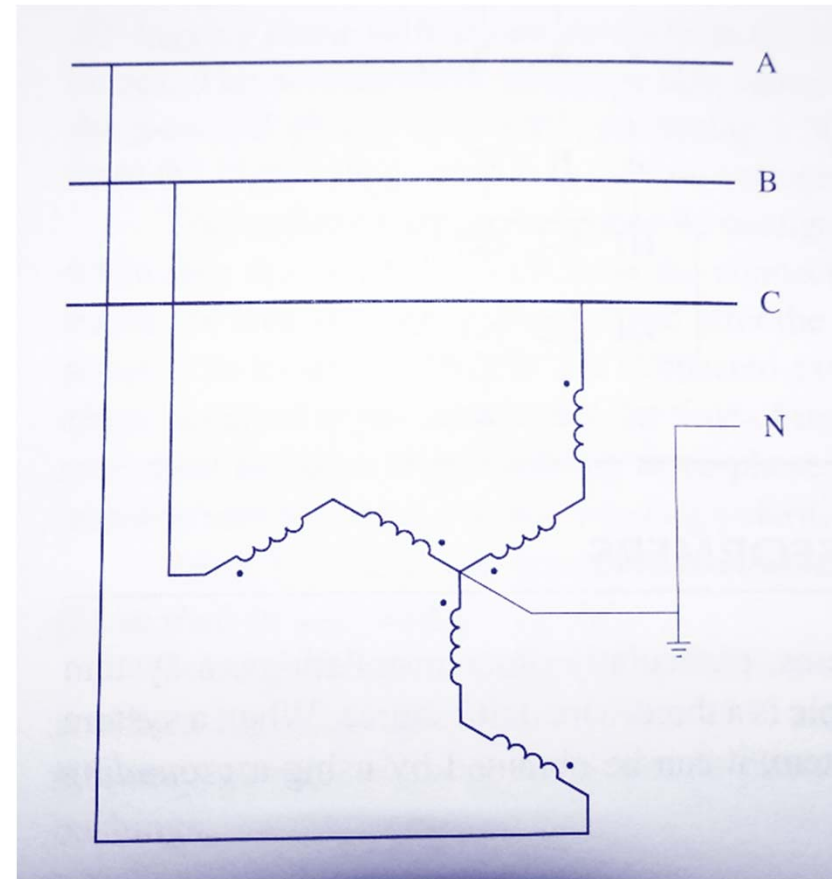


Industrial Power Distribution

Winding Types

□ Wye-Delta Ground Bank

- Provides Ground Source for Ungrounded Systems

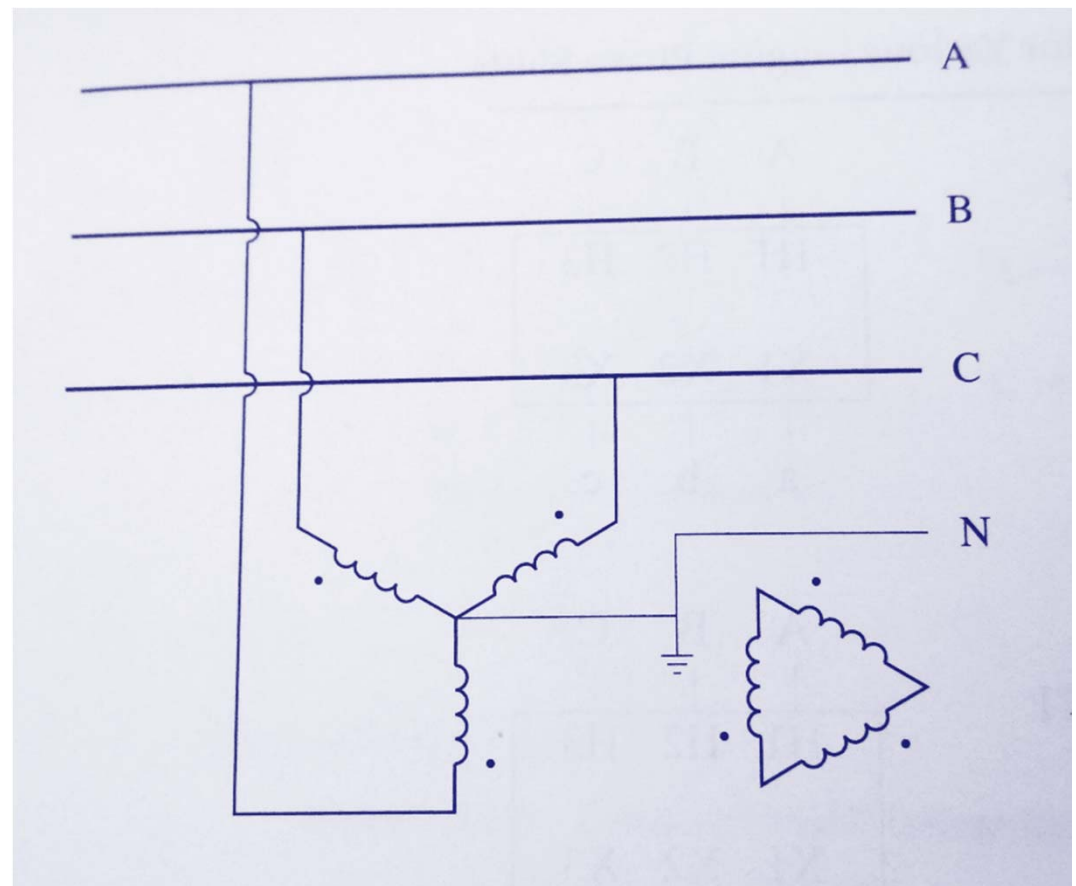

Industrial Power Distribution

Inrush Detection and Restraint

- Characterized by current into one winding of transformer, and not out of the other winding(s)
 - This causes a differential element to pickup

- Use **inrush restraint** to block differential element during inrush period
 - **Initial inrush** occurs during transformer energizing as the core magnetizes
 - **Sympathy inrush** occurs from adjacent transformer(s) energizing, fault removal, allowing the transformer to undergo a low level inrush
 - **Recovery Inrush** occurs after an out-of-zone fault is cleared and the fault induced depressed voltage suddenly rises to rated.


Classical Inrush Detection

- 2nd harmonic restraint has been employed for years
- “Gap” detection has also been employed
- As transformers are designed to closer tolerances, the incidence of both 2nd harmonic and low current gaps in waveform have decreased
- If 2nd harmonic restraint level is set too low, differential element may be blocked for internal faults with CT saturation (with associated harmonics generated)

Advanced Inrush Detection


- 4th harmonic is also generated during inrush
 - Even harmonics are more prevalent than odd harmonics during inrush
 - Odd harmonics are more prevalent during CT saturation
- Use 4th harmonic and 2nd harmonic together
 - Use RMS sum of the 2nd and 4th harmonic as inrush restraint
- Result: Improved security while not sacrificing reliability

Inrush Oscillograph

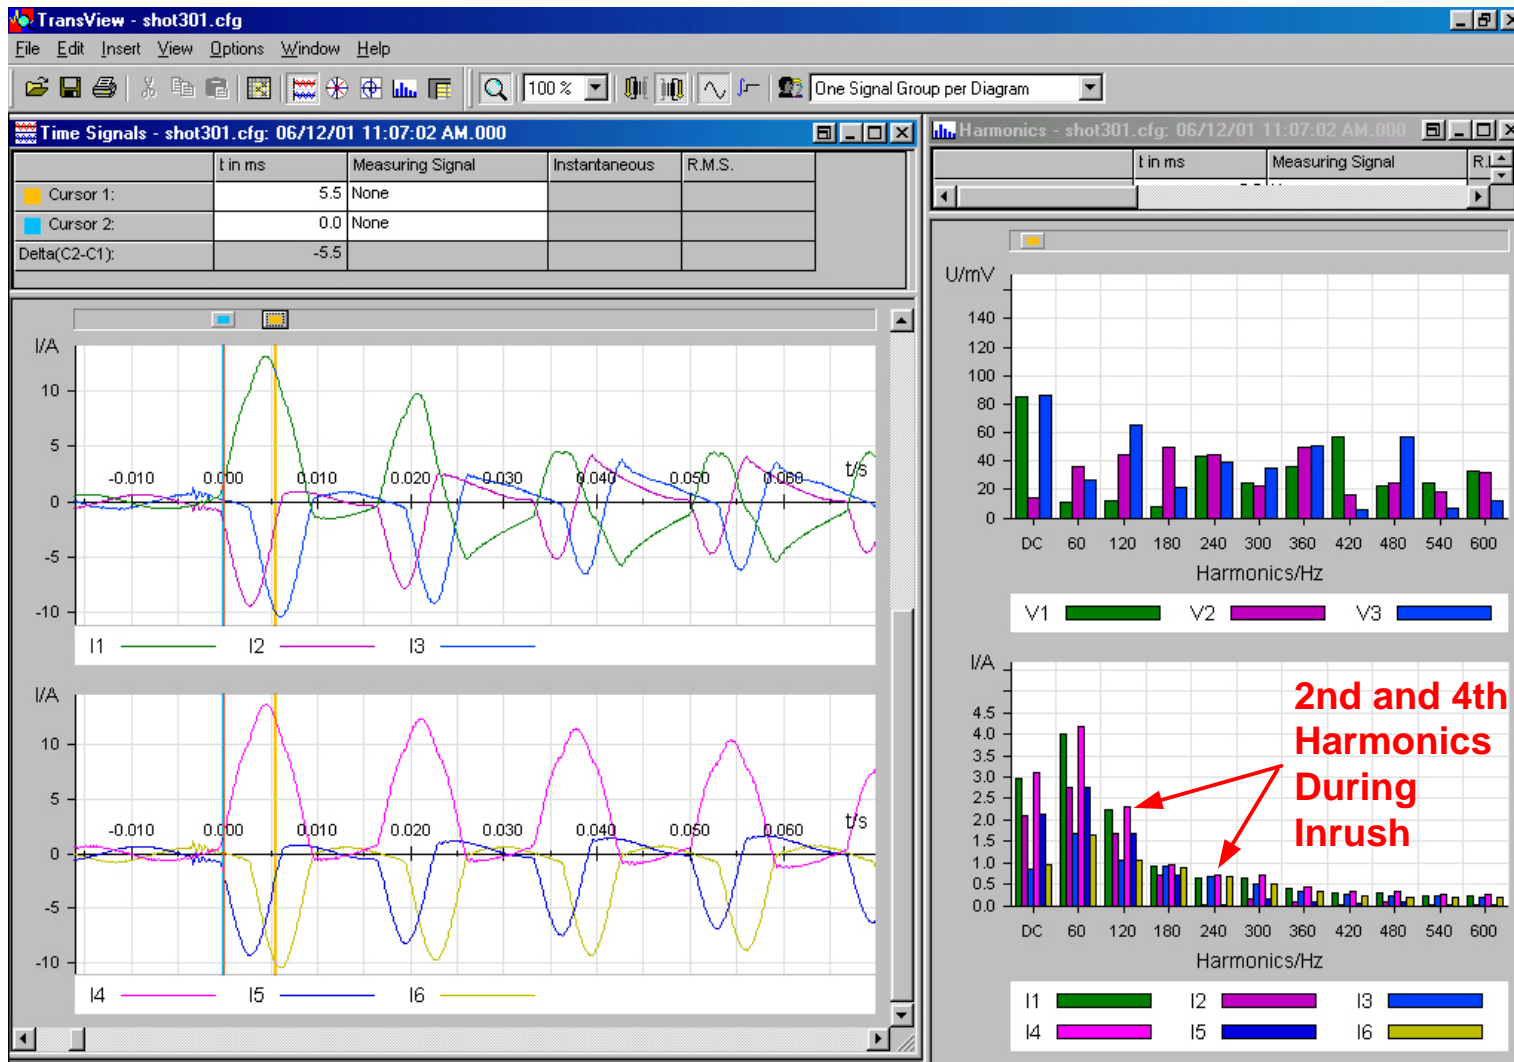

Typical Transformer Inrush Waveform

Inrush Oscillograph

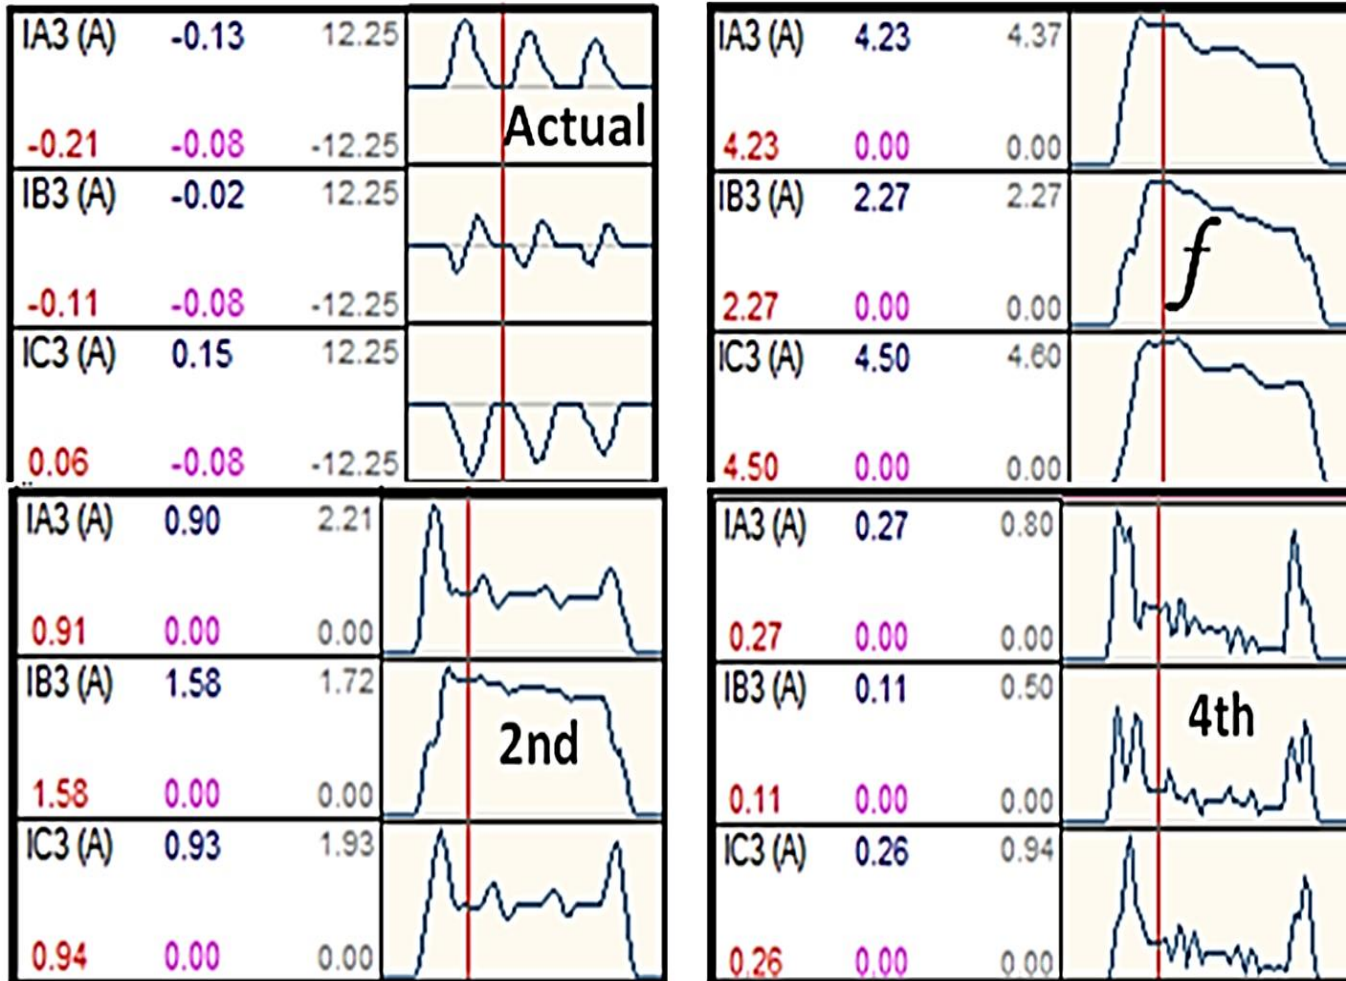

Typical Transformer Inrush Waveform

Point-on-Wave Considerations During Switch On

- As most circuit breakers are ganged three-pole, one phase will be near voltage zero at the moment of transformer energization
- When a phase of a transformer is switched on near zero voltage, the inrush is increased and so is the resultant harmonics
- Low levels of harmonics (especially modern transformers) may not provide inrush restraint for affected phase – security risk!
- Employ cross-phase averaging to compensate for this issue

Cross Phase Averaging

- Provides security if a phase(s) has low harmonic content during inrush
- Cross phase averaging uses the sum of harmonics on all three phases as the restraint value


$$I_{d_{CPA24}} = \sqrt{I_{Ad_{24}}^2 + I_{Bd_{24}}^2 + I_{Cd_{24}}^2}$$

- Cross Phase Averaging (harmonic sharing) is a modification of the harmonic blocking technique
- The harmonic content of all three phases is summed before checking the ratio of the fundamental to harmonic
- This approach adds security in applications in which harmonic content on one or two phases is not sufficient to block the operation of the relay


Overexcitation Restraint

- Overexcitation occurs when volts per hertz level rises (V/Hz) above the rated value
- This may occur from:
 - Load rejection (generator transformers)
 - Malfunctioning of voltage and reactive support elements
 - Malfunctioning of breakers and line protection (including transfer trip communication equipment schemes)
 - Malfunctioning of generator AVRs
- The voltage rise at nominal frequency causes the V/Hz to rise
- This causes the transformer core to saturate and thereby increase the magnetizing current.
- The increased magnetizing current contains 5th harmonic component
- This magnetizing current causes the differential element to pickup
 - Current into transformer that does not come out


Overexcitation Event

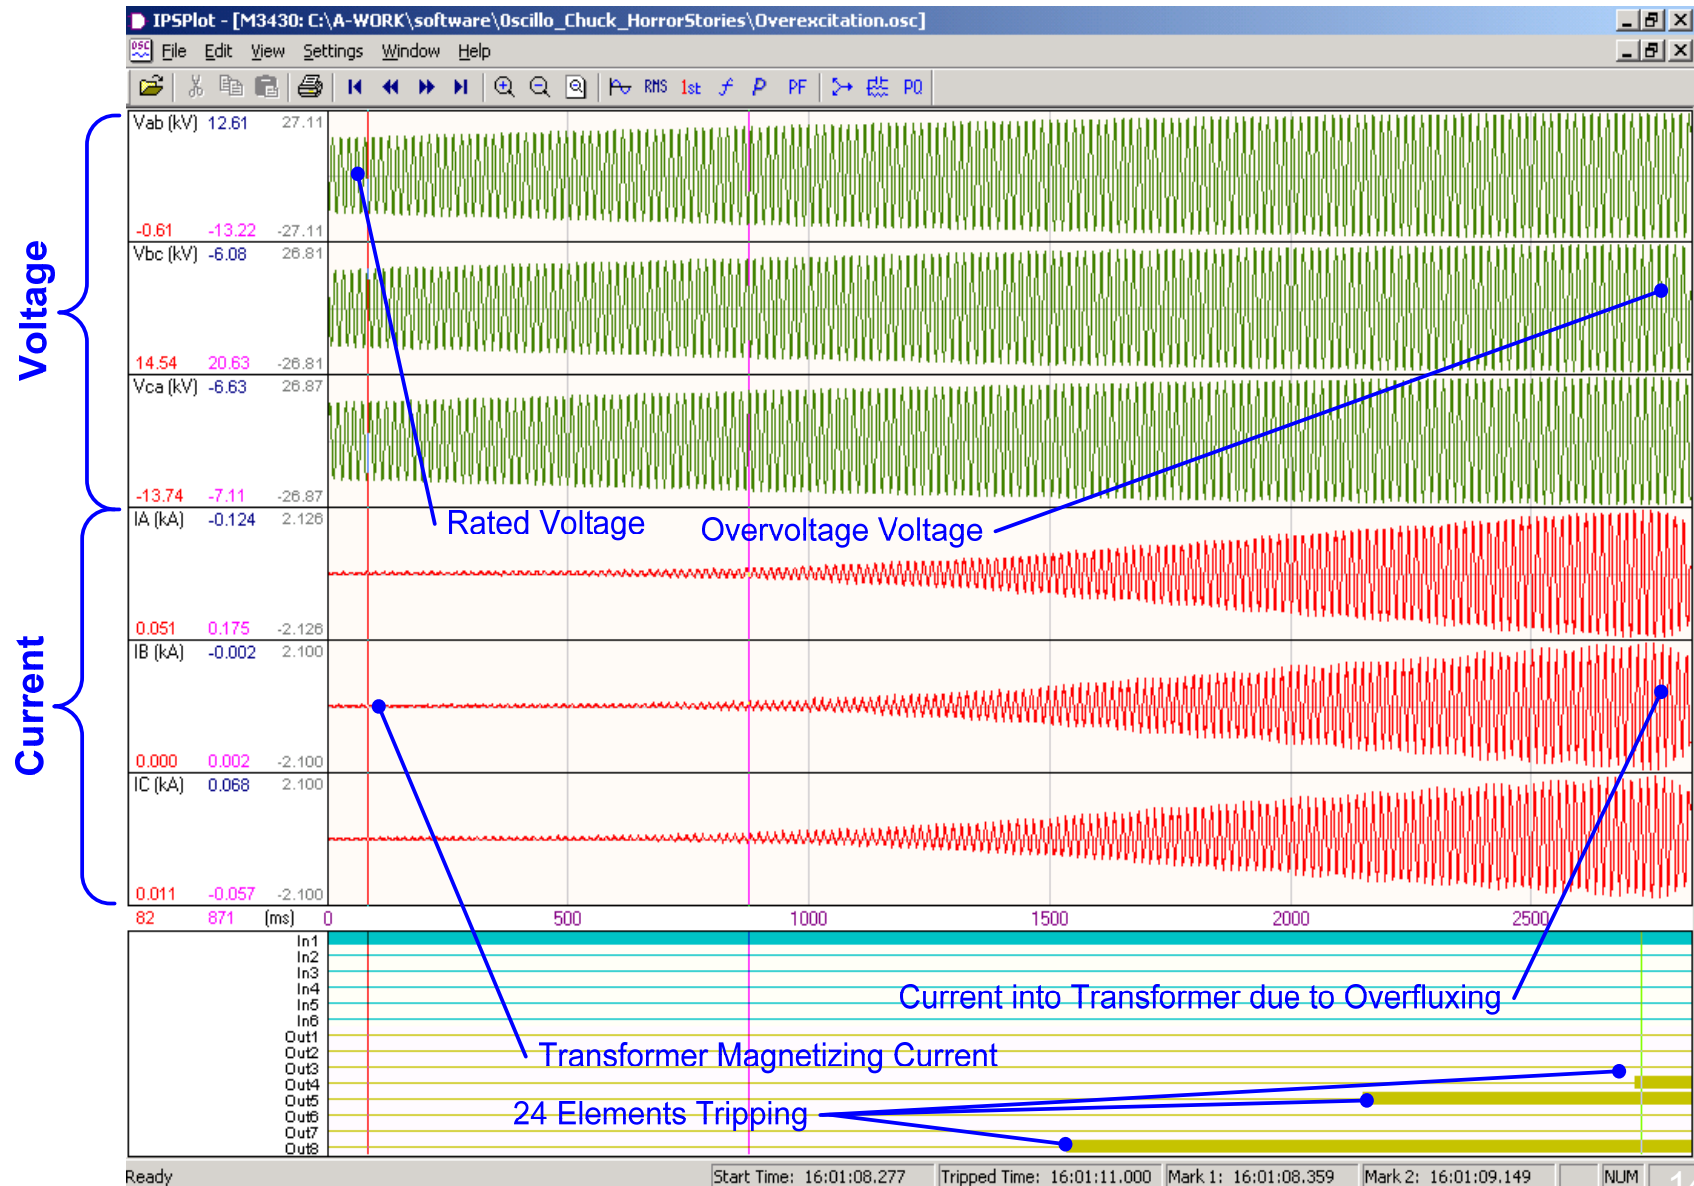


Overexcitation Event

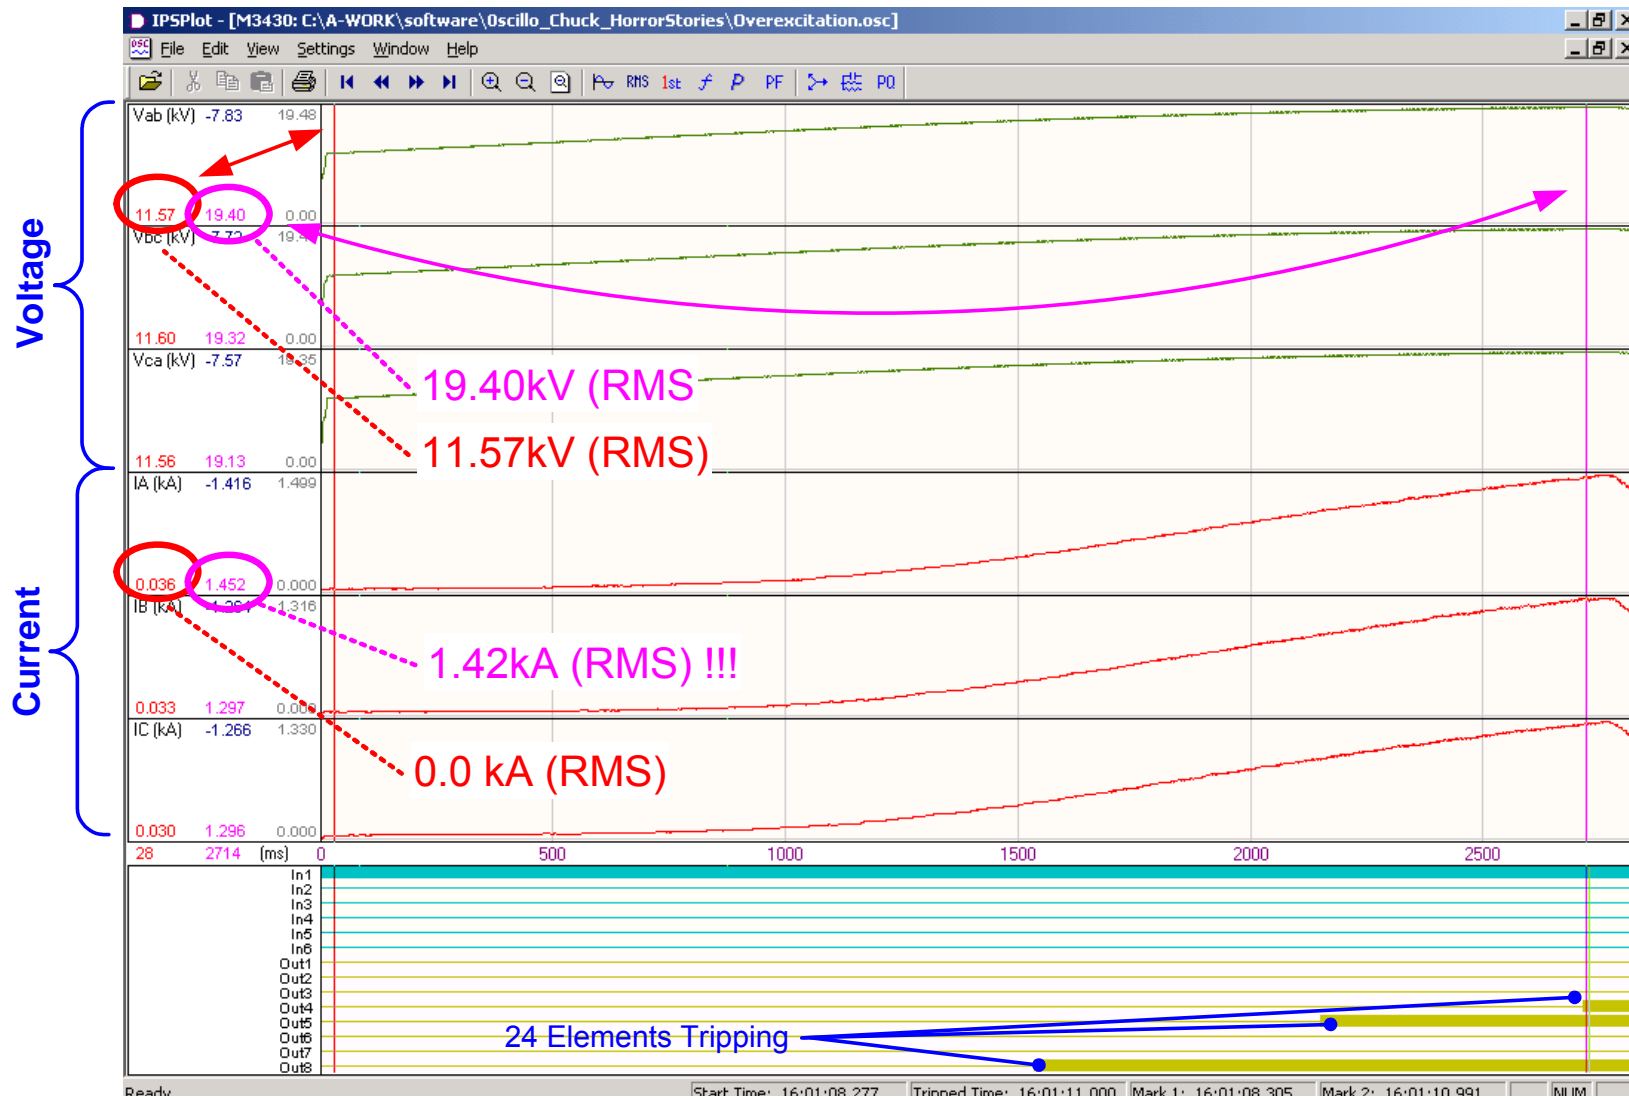

Overexcitation Event

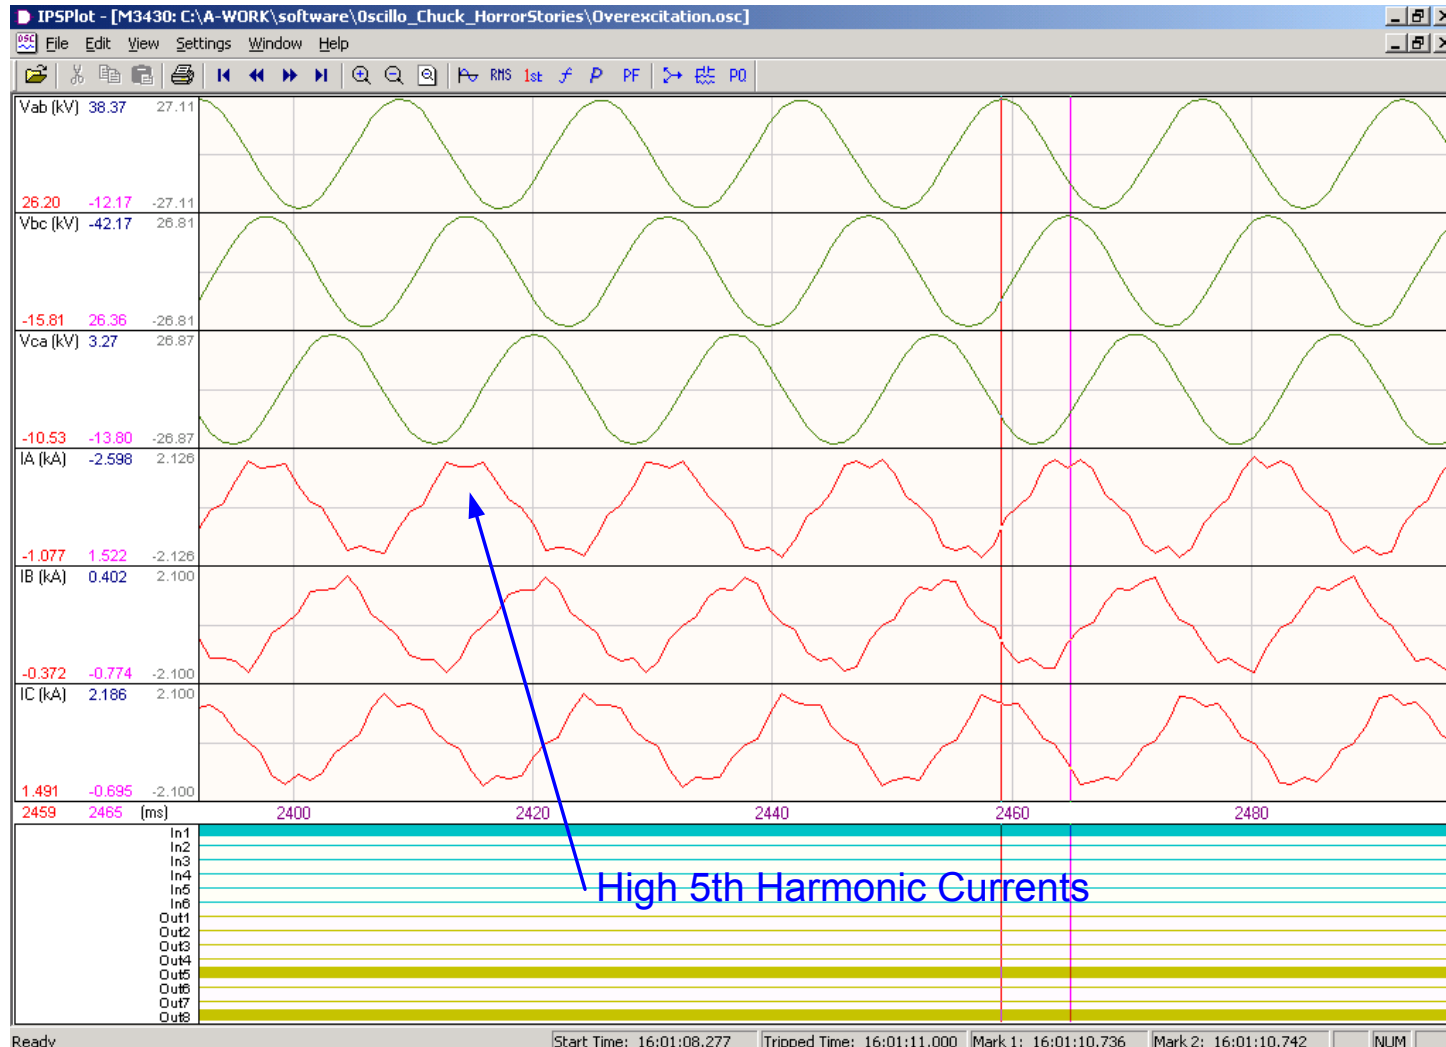


Overexcitation Event

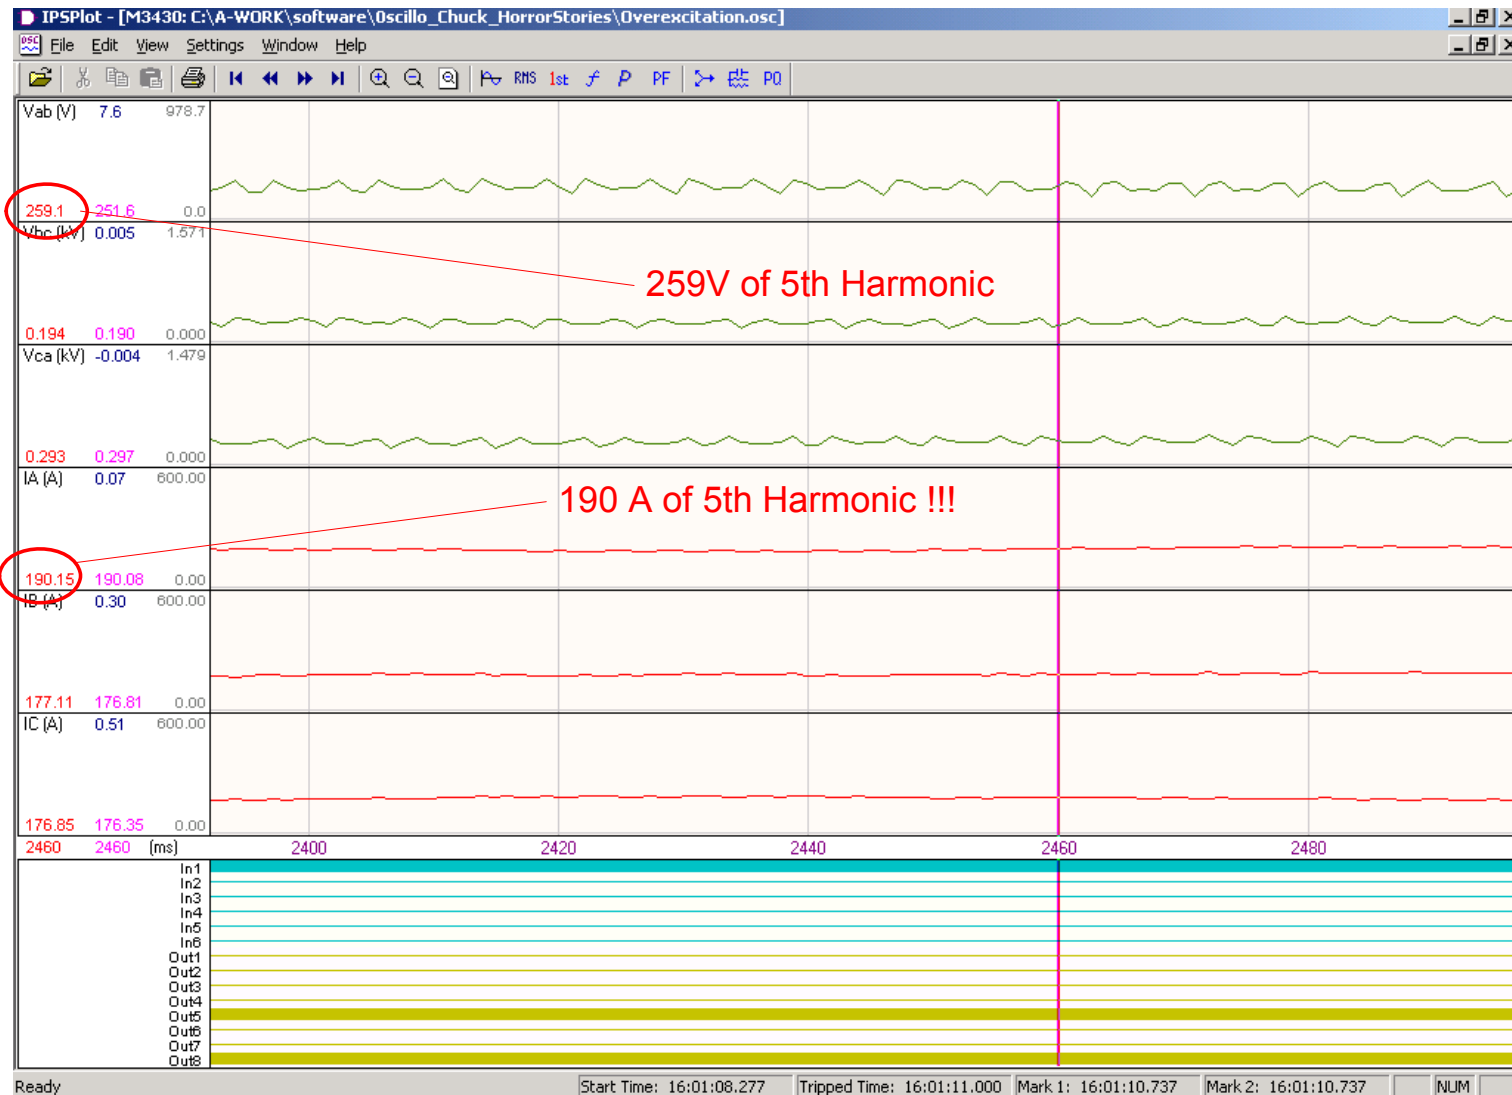

Overexcitation Restraint

- Use 5th harmonic level to detect overexcitation
- Most relays block the differential element from functioning during transformer overexcitation
 - If the transformer internally faults (1 or 2 Phase), the unfaulted phase(s) remain overexcited blocking the differential element
 - Faulting during overexcitation is more likely if the voltage is greater than rated, as it will cause increased dielectric stress
- An improved strategy is to raise the pick up level of the differential element to accommodate the increased difference currents caused by the transformer saturation
 - This allows the differential element to rapidly trip if an internal fault occurs during the overexcitation period
- Result: Improved reliability while not sacrificing security

Trip Characteristic – 87T

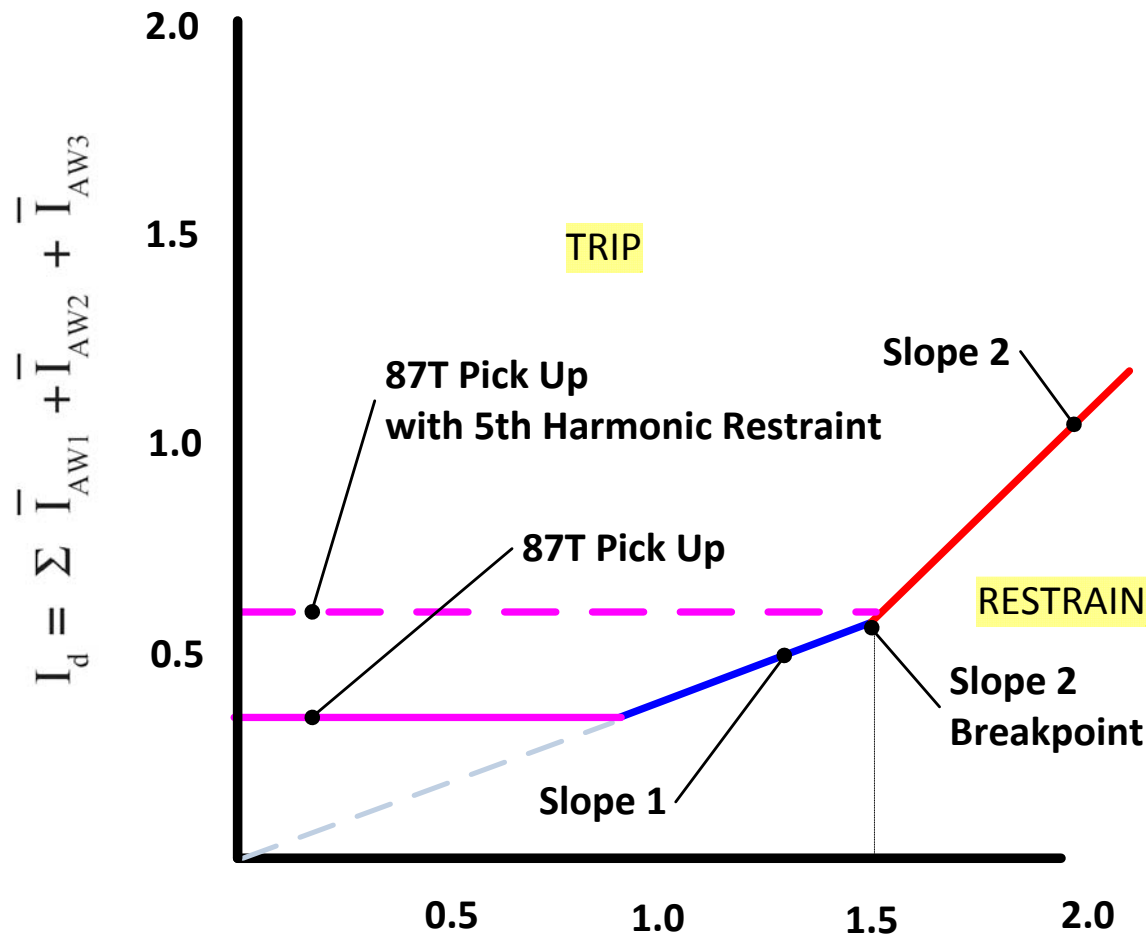

$$I_R = \frac{\sum |I_{AW1}| + |I_{AW2}| + |I_{AW3}|}{2}$$

Switch-onto-Fault

- Transformer is faulted on energizing
- Harmonic restraint on unfaulted phases may work against trip decision if cross phase averaging is used
 - This may delay tripping until the inrush current is reduced
- 87H and 87GD can be used to provide high speed protection for this condition
 - If fault is close to bushings current may be greater than 6-8pu
 - High set element 87H can provide high speed protection for severe faults as this function is not restrained by harmonics
 - 87H is set above the worst case inrush current
 - 87GD function can provide fast protection during switching onto ground faults as this element is not restrained using harmonics

Phase Differential

- 87T element is typically set with 30-40% pickup
 - This is to accommodate:
 - Class “C” CT accuracy (+/- 10%, x20 nominal current)
 - Effects of LTCs (+/- 10%)

- 87HS set to 9-12x rated current
 - Inrush does not exceed 6-8x rated current

- That leaves a portion of the winding not covered for a ground fault (near the neutral)

- Employ a ground differential element to improve sensitivity (87GD)

Phase Differential (87)

87: Phase Differential Current

F87T F87H C.T. Tap

Pickup: 0.10

Percent Slope #1: 5

Percent Slope #2: 5

Slope Break Point: 1.0

Even Harmonics Restraint (2nd and 4th) Disable Enable Enable w/cross average

Restraint: 5

5th Harmonic Restraint Disable Enable Enable w/cross average


Restraint: 5

Pickup: 0.10


Outputs: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16

Blocking Inputs: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18

Save Cancel

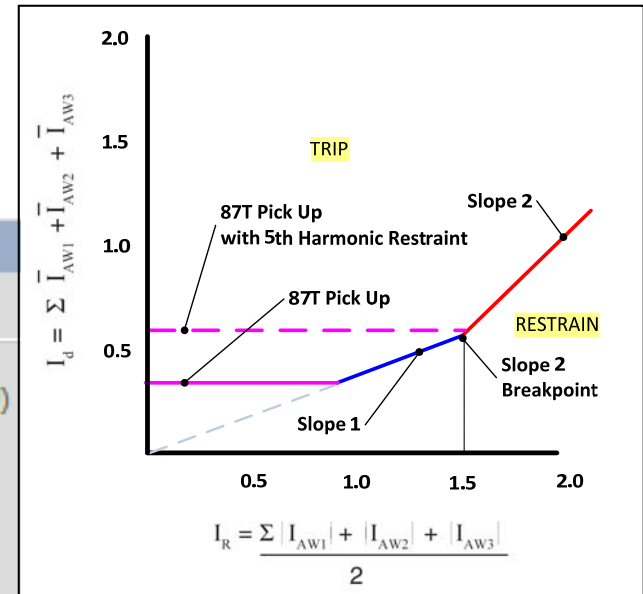


Phase Differential (87)

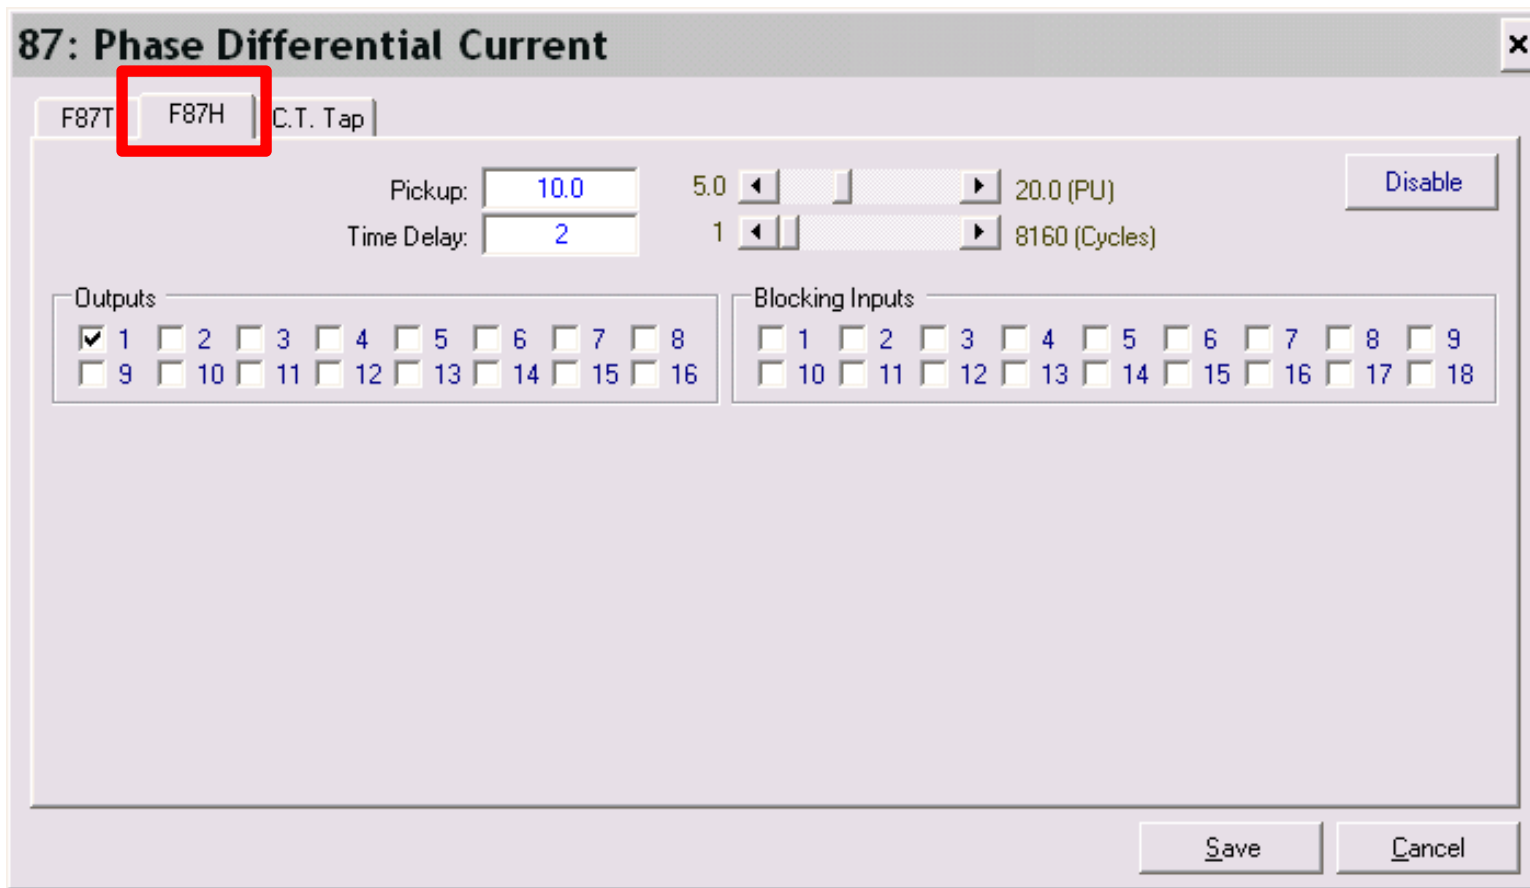

Phase Differential (87)

- Setting “tap” is a method used to nominalize the winding currents with respect to MVA, kV and CT ratio

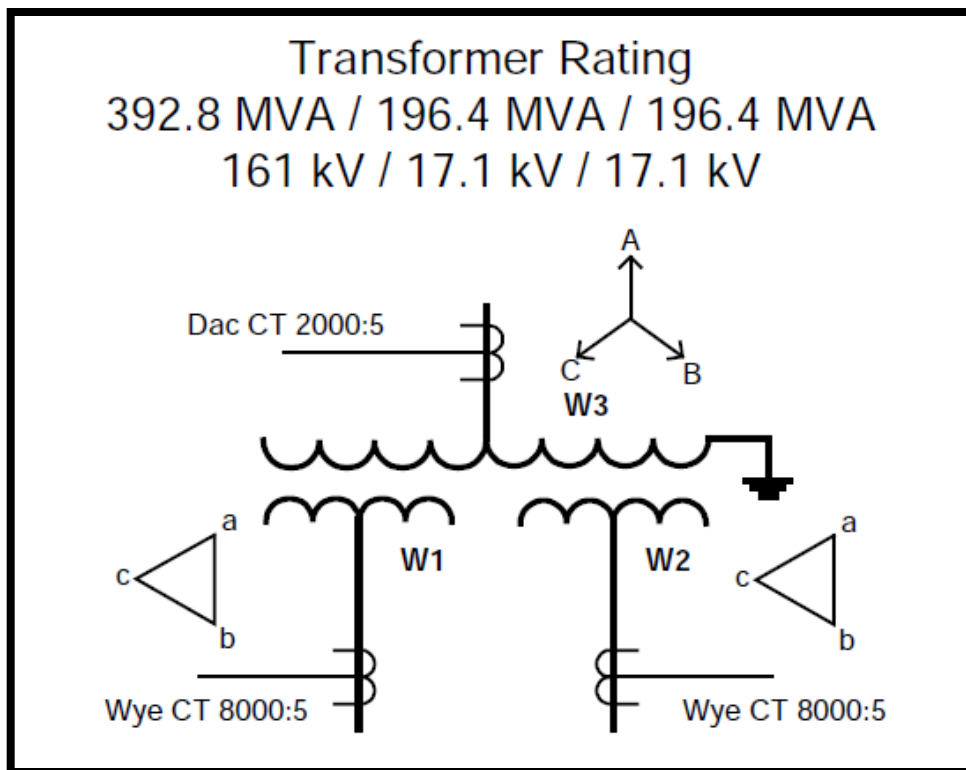

$$87 \text{ CT Tap}_{w1} = \frac{392.8 \text{ MVA} \times 10^3}{\sqrt{3} \times 17.1 \text{ kV} \times 1600} = 8.29$$

$$87 \text{ CT Tap}_{w2} = \frac{392.8 \text{ MVA} \times 10^3}{\sqrt{3} \times 17.1 \text{ kV} \times 1600} = 8.29$$

$$87 \text{ CT Tap}_{w3} = \frac{392.8 \text{ MVA} \times 10^3}{\sqrt{3} \times 161 \text{ kV} \times 400} = 3.52$$

Phase Differential (87)

87: Phase Differential Current

F87T | F87H | **C.T. Tap**


Winding 1 C.T. Tap:	8.29	1.00	100.00
Winding 2 C.T. Tap:	8.29	1.00	100.00
Winding 3 C.T. Tap:	3.52	1.00	100.00
Winding 4 C.T. Tap:	5.00	1.00	100.00

Save Cancel

Types of Protection: Ground Differential (87GD; REF)


- Sensitive detection of ground faults, including those near the neutral
- Does not require inrush or overexcitation restraint
- Low impedance grounded systems use directional signal for added stability
- Low impedance grounded systems do not require dedicated CTs
 - Same set of CTs can be used for phase differential, phase overcurrent, ground differential and ground overcurrent protection

Types of Protection: Ground Differential (87GD; REF)

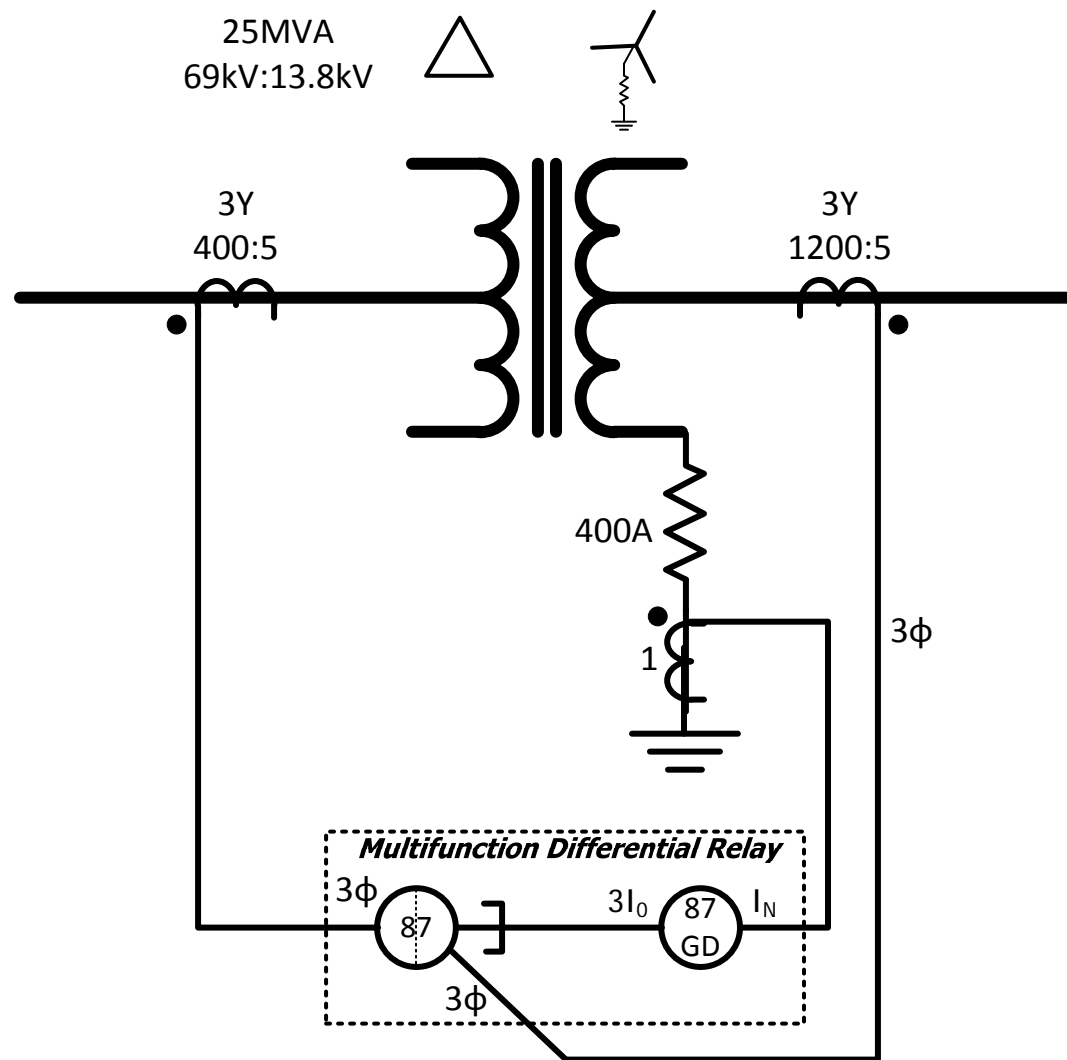


Improved Ground Fault Sensitivity


- Use 87GD
- $I_A + I_B + I_C = 3I_0$
- If fault is internal, opposite polarity
- If fault is external, same polarity

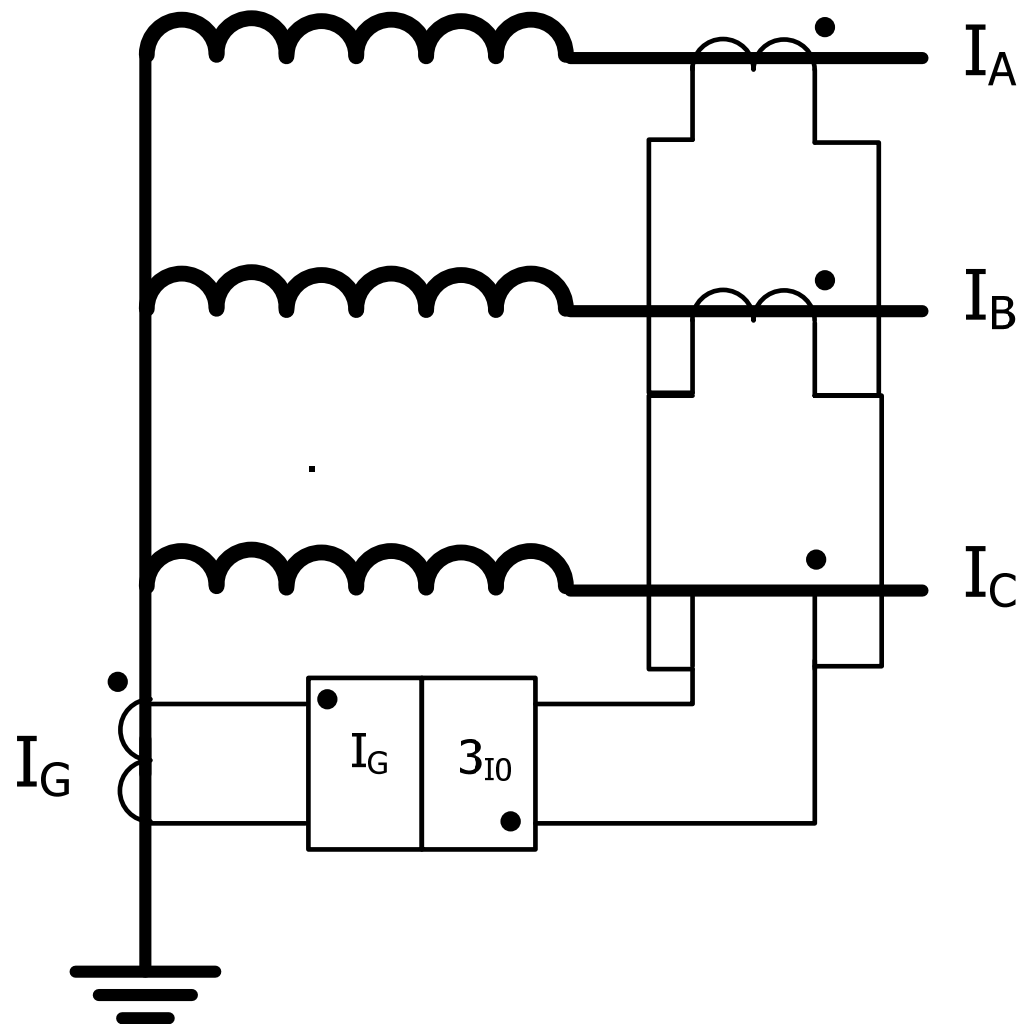

87GD with Internal Fault, Double Fed

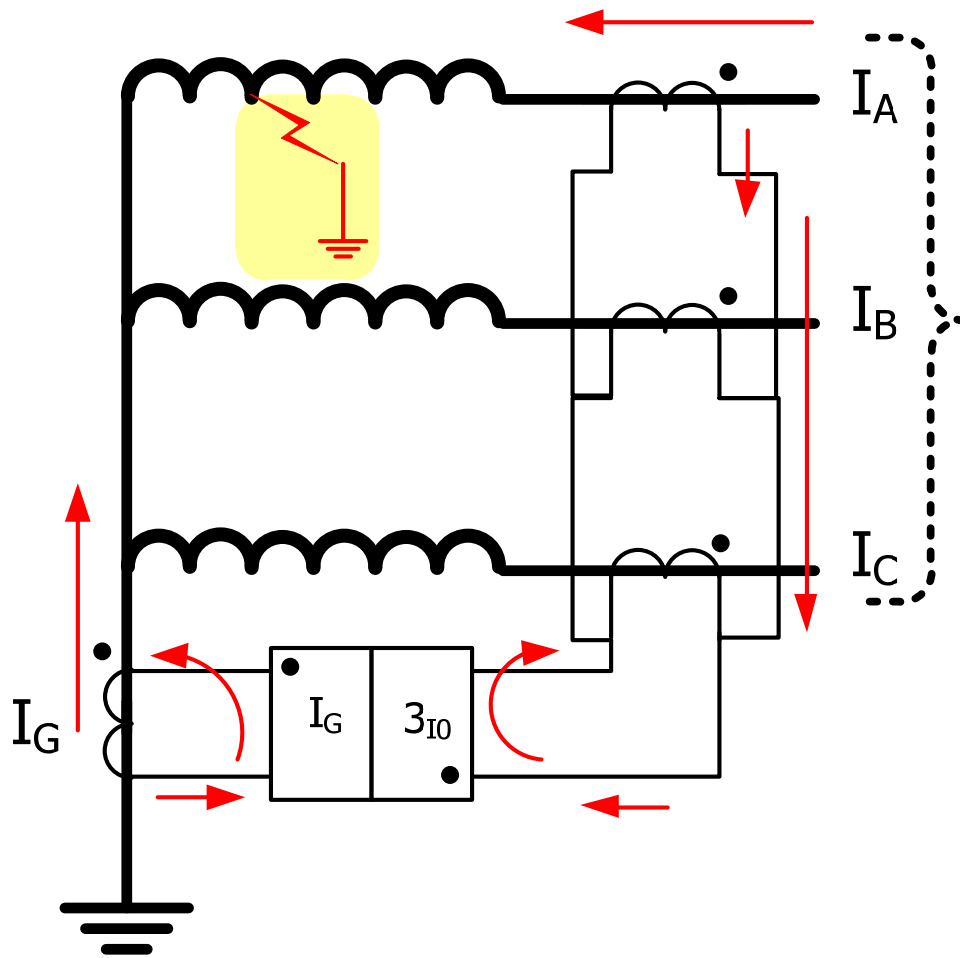


- Residual current ($3I_0$) calculated from individual phase currents
- Paralleled CTs shown to illustrate principle

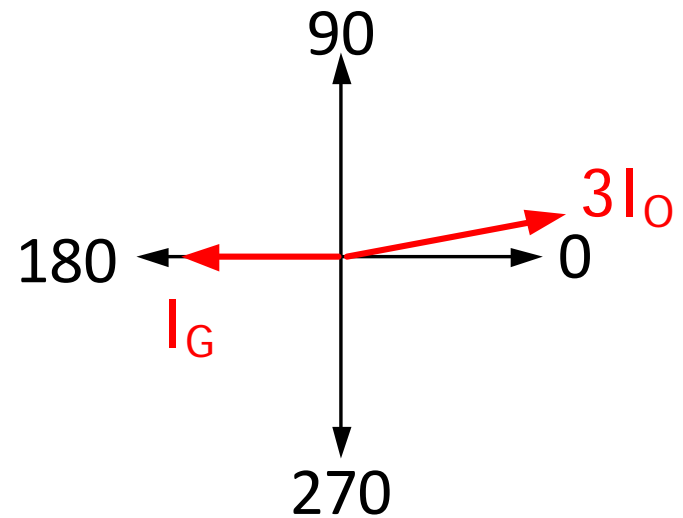


$$-3I_0 \times I_G \cos(180) = 3I_0 I_G$$

87GD with External Through Fault

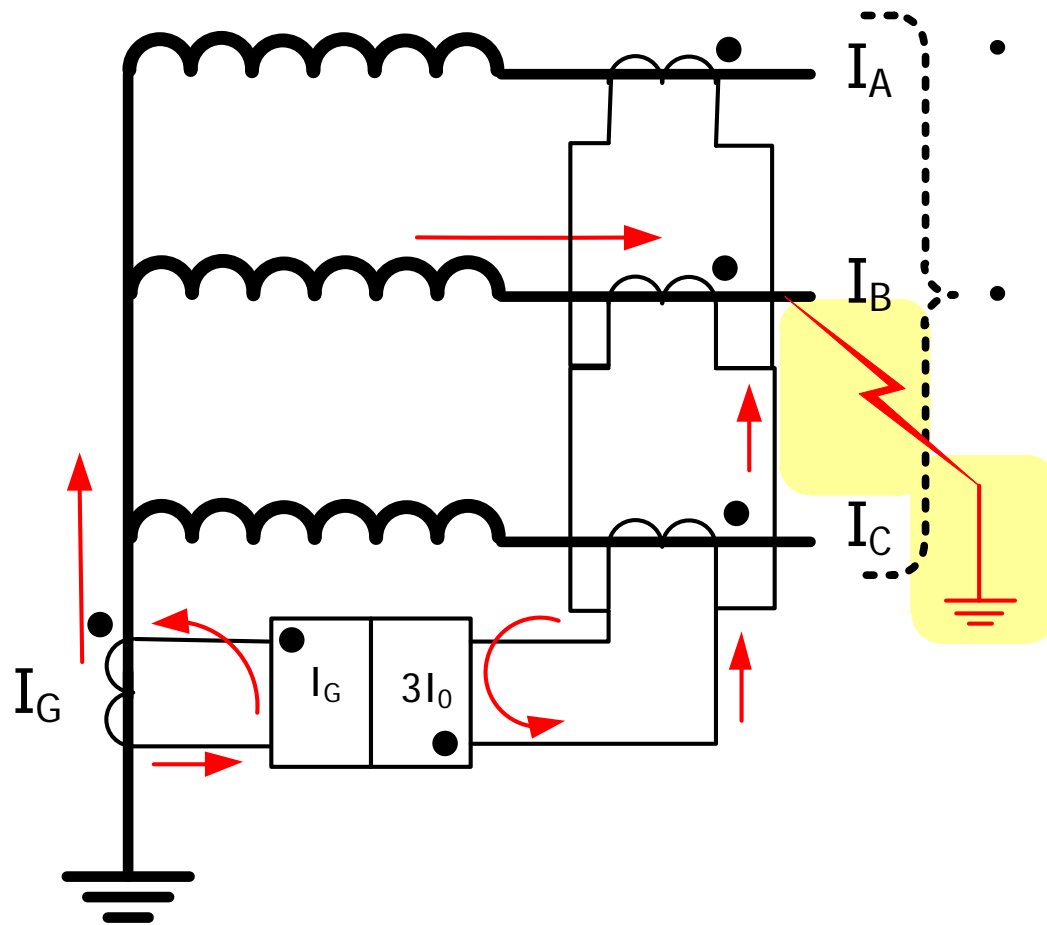

- Residual current ($3I_0$) calculated from individual phase currents
- Paralleled CTs shown to illustrate principle

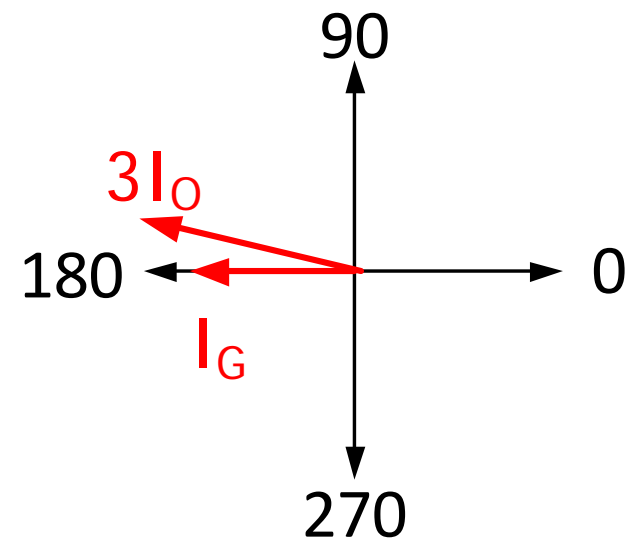


$$-3I_0 \times I_G \cos(180) = 3I_0 I_G$$

Improved Ground Fault Sensitivity (87GD)

- Direction calculation used with currents over 140mA on both sets of CTs (3_{I0} and I_G)
- Directional element used to improve security for heavy external phase to phase faults that cause saturation
- When current $>140\text{mA}$, element uses current setting *and* directional signal
- When current $\leq 140\text{mA}$, element uses current setting only
 - Saturation will not occur at such low current levels
 - Directional signal not required for security
 - Allows element to function for internal faults without phase output current (open low side breaker, transformer energized)

87GD with Internal Fault, Single Feed

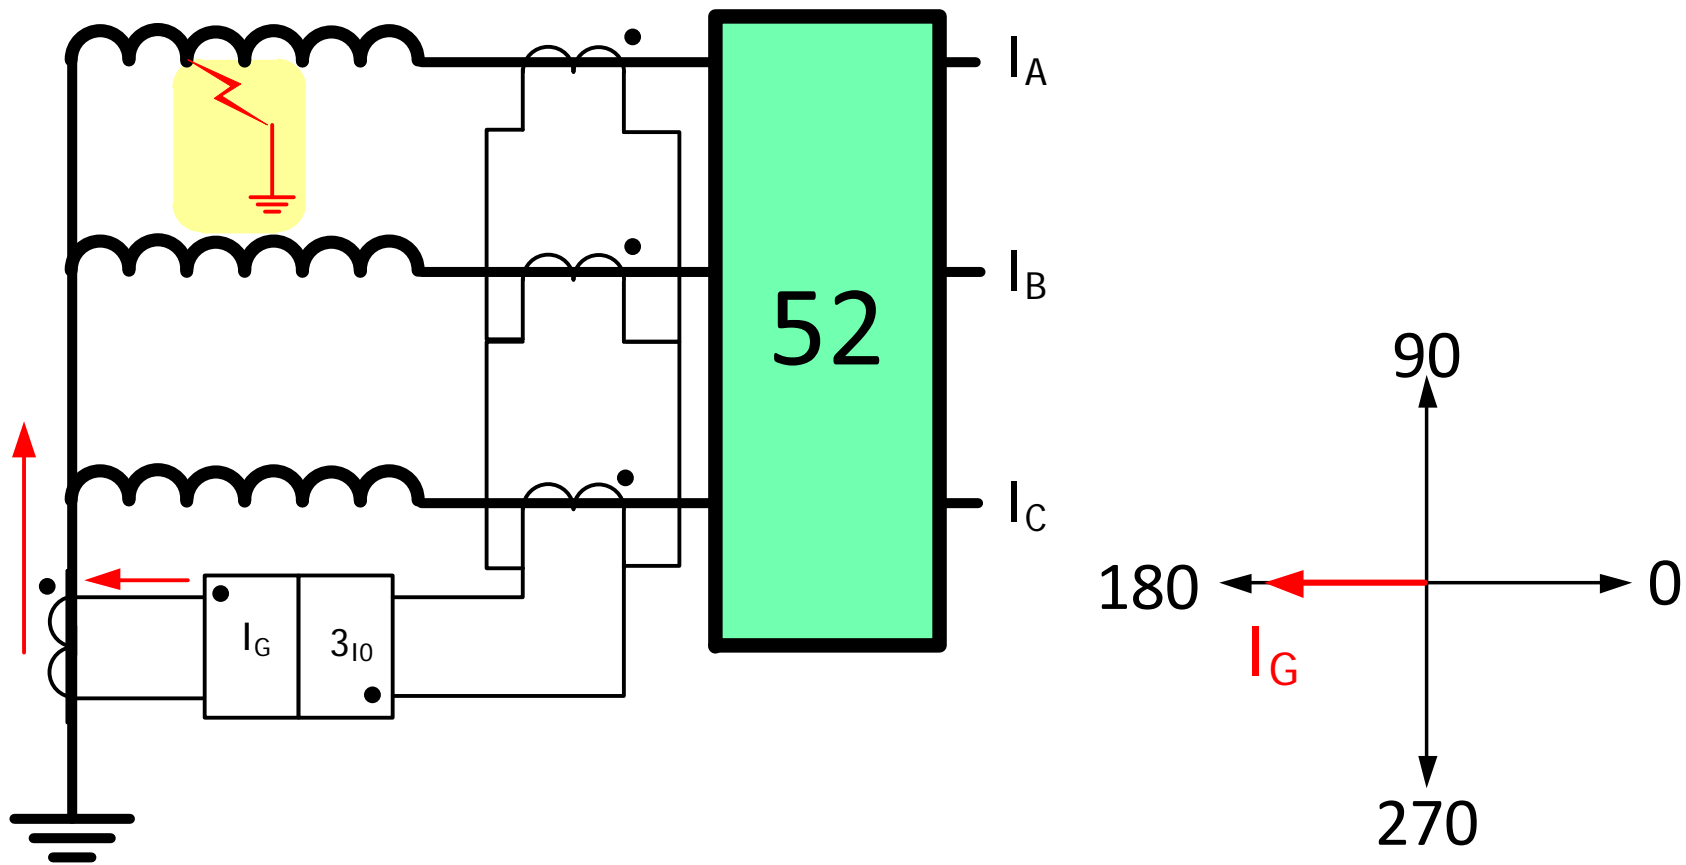

$$-3I_0 \times I_G \cos(180) = 3I_0 I_G$$

$I_G > \text{setting}$

87GD Function

May be used with Current Summing

87GD: Ground Differential [X]

Winding 2 | Winding 3 | Winding 4

#1

Pickup: 0.20 [▼] [▲] 10.00 (A) Disable

Time Delay: 1 [▼] [▲] 8160 (Cycles)

Outputs: 1 2 3 4 5 6 7 8
 9 10 11 12 13 14 15 16

Blocking Inputs: 1 2 3 4 5 6 7 8 9
 10 11 12 13 14 15 16 17 18

#2

Pickup: 0.20 [▼] [▲] 10.00 (A) Disable

Time Delay: 1 [▼] [▲] 8160 (Cycles)

Outputs: 1 2 3 4 5 6 7 8
 9 10 11 12 13 14 15 16

Blocking Inputs: 1 2 3 4 5 6 7 8 9
 10 11 12 13 14 15 16 17 18

Settings


3I0 Current Selection: Summing 1 Summing 2 Winding 2

Directional Element: Disable Enable

CT Ratio Correction: 0.10 [▼] [▲] 7.99

Save Cancel

Ground Fault Protection for Delta-Wye Transformer

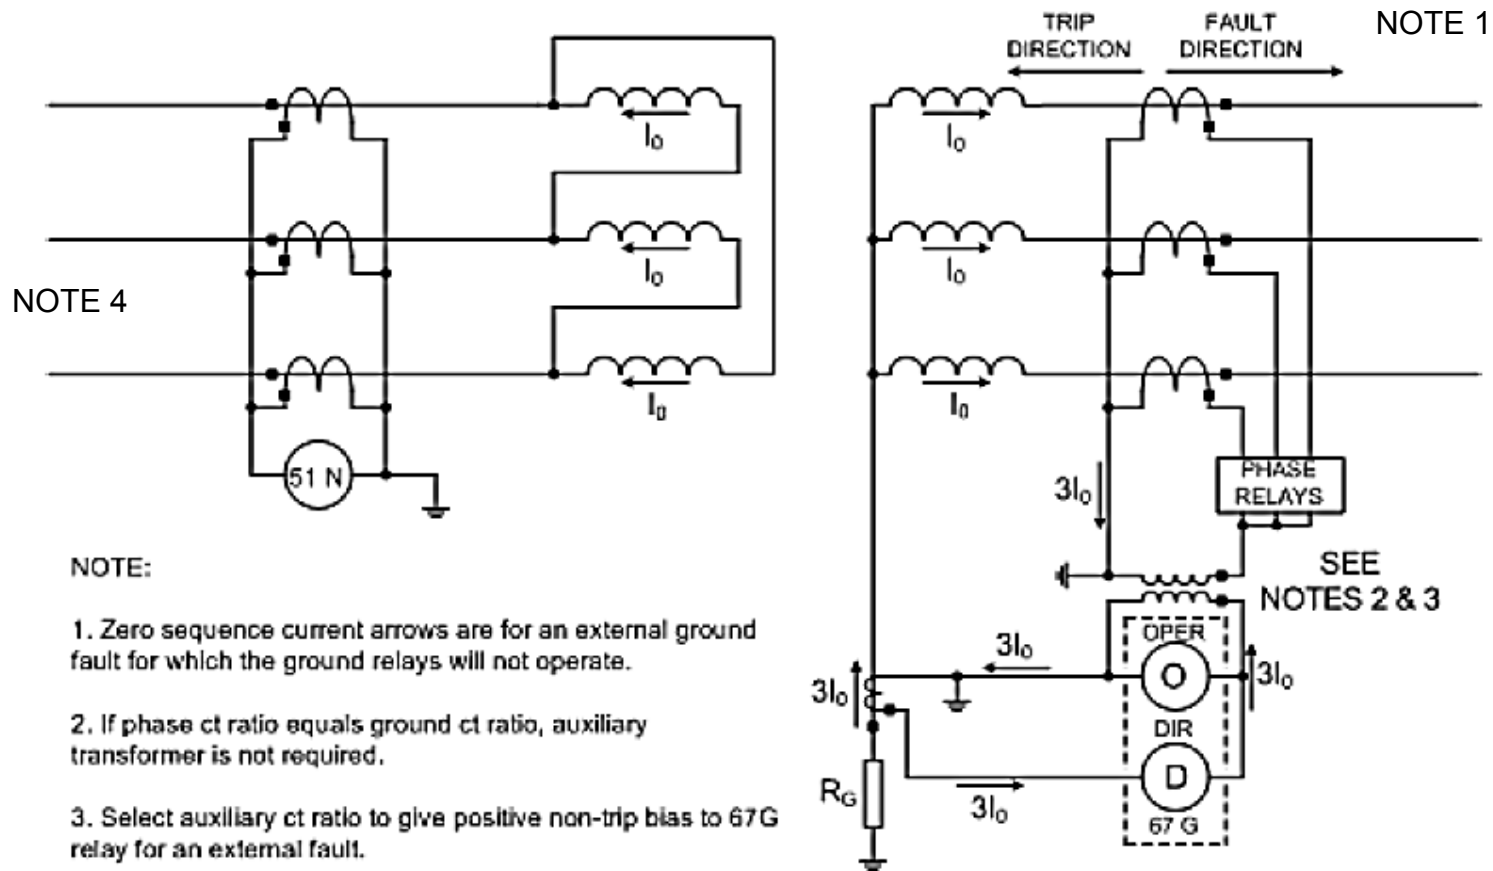

4. System must supply zero sequence current for this scheme to work


49 Thermal Overcurrent

- The Transformer Overload function (49) provides protection against possible damage during overload conditions
- IEC-255-8 standard (presently under revision), provides both cold and hot curves
- The function uses the thermal time constant of the transformer and the maximum allowable continuous overload current (I_{\max}) in implementing the inverse time characteristic

49 Thermal Overcurrent

The operating time is defined according to the standard IEC 60255-8:

$$t = \tau \times \ln \left(\frac{I_L^2 - I_{PL}^2}{I_L^2 - I_{max}^2} \right)$$

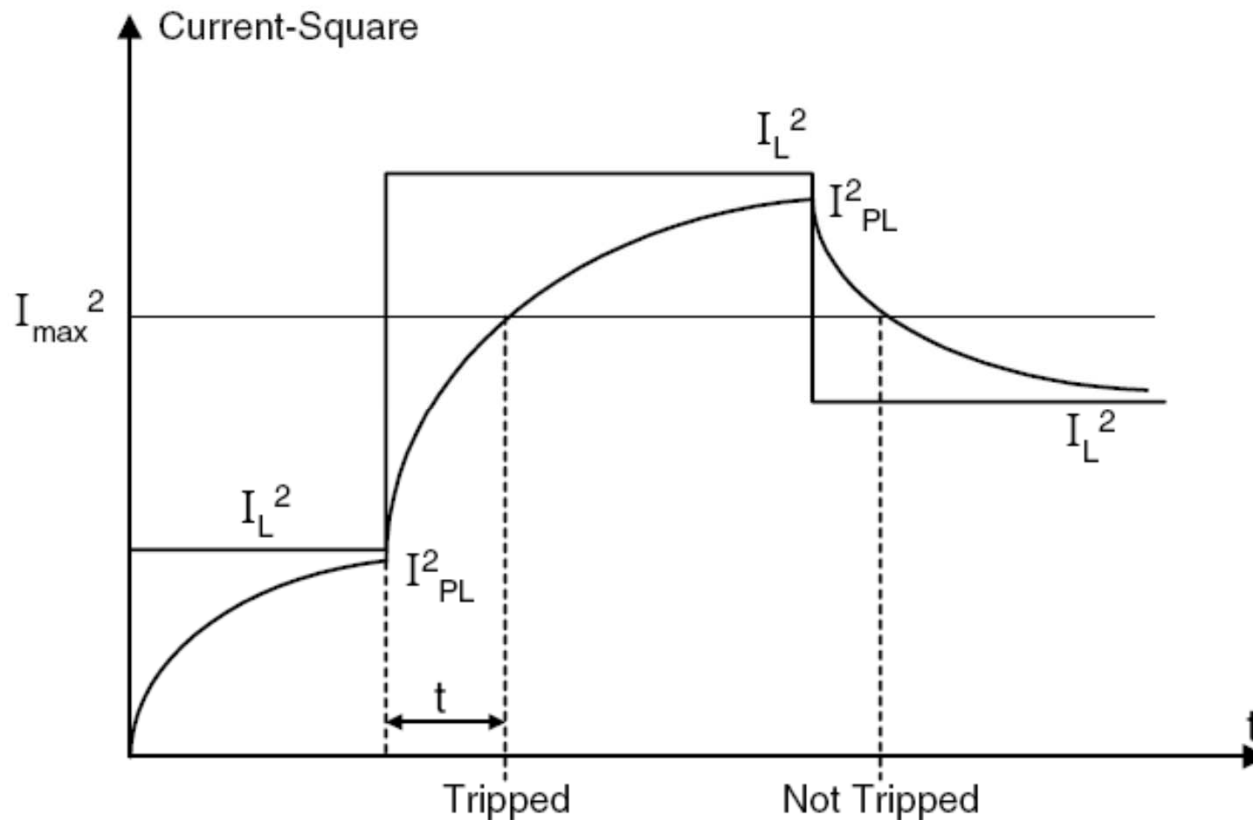

49 Thermal Overcurrent

49: Winding Thermal Protection ✕

Time Constant: 1.0 999.9 (min)

Max Overload Current: 1.00 10.00 (A)

Current Selection: ▾

Outputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input checked="" type="checkbox"/> 7	<input type="checkbox"/> 8
<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16

Blocking Inputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9
<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 17	<input type="checkbox"/> 18



Phasor Displays


***A very useful commissioning tool
for viewing selected vectors***

- **Differential**
 - Displays uncompensated currents
 - You can see the phase shift and relative magnitudes
 - Displays compensated currents
 - If they are equal in magnitude, and W2 and W3 are 180 degrees out from W1, the field wiring and relay settings are in agreement


- **All Currents and Voltages**
 - Displays all values

Phasor Diagram

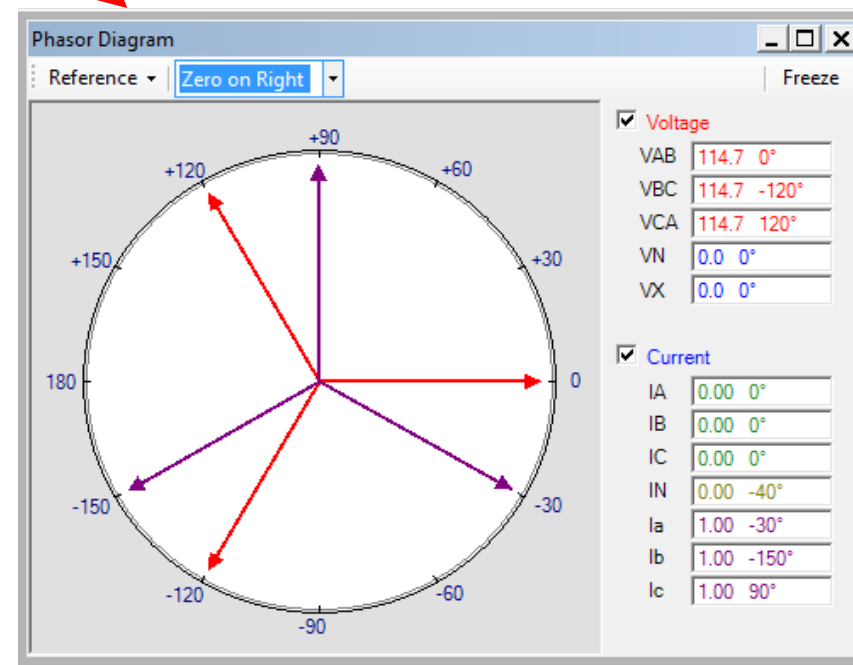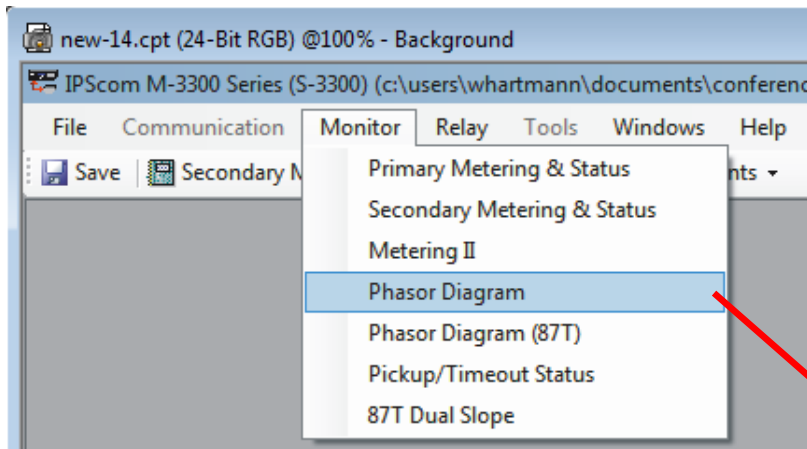


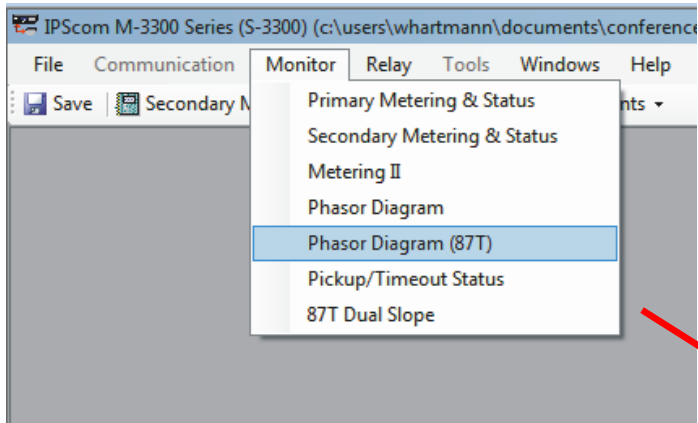

Phasor Diagram

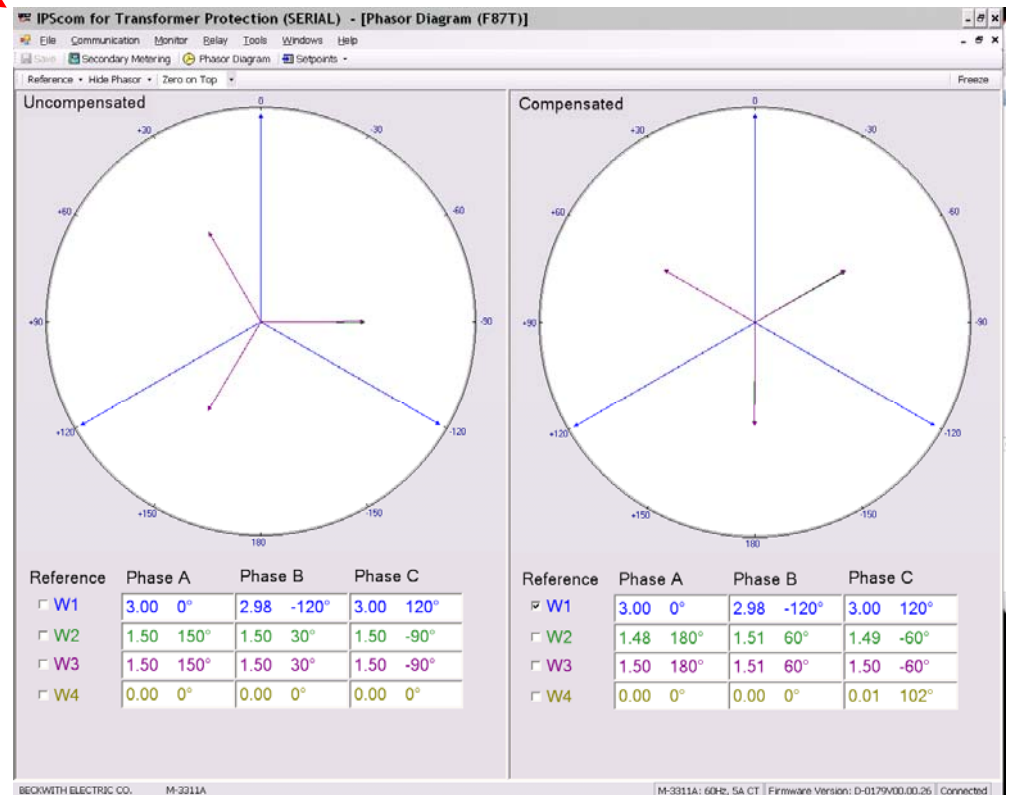


Phasor Display (Vectors)

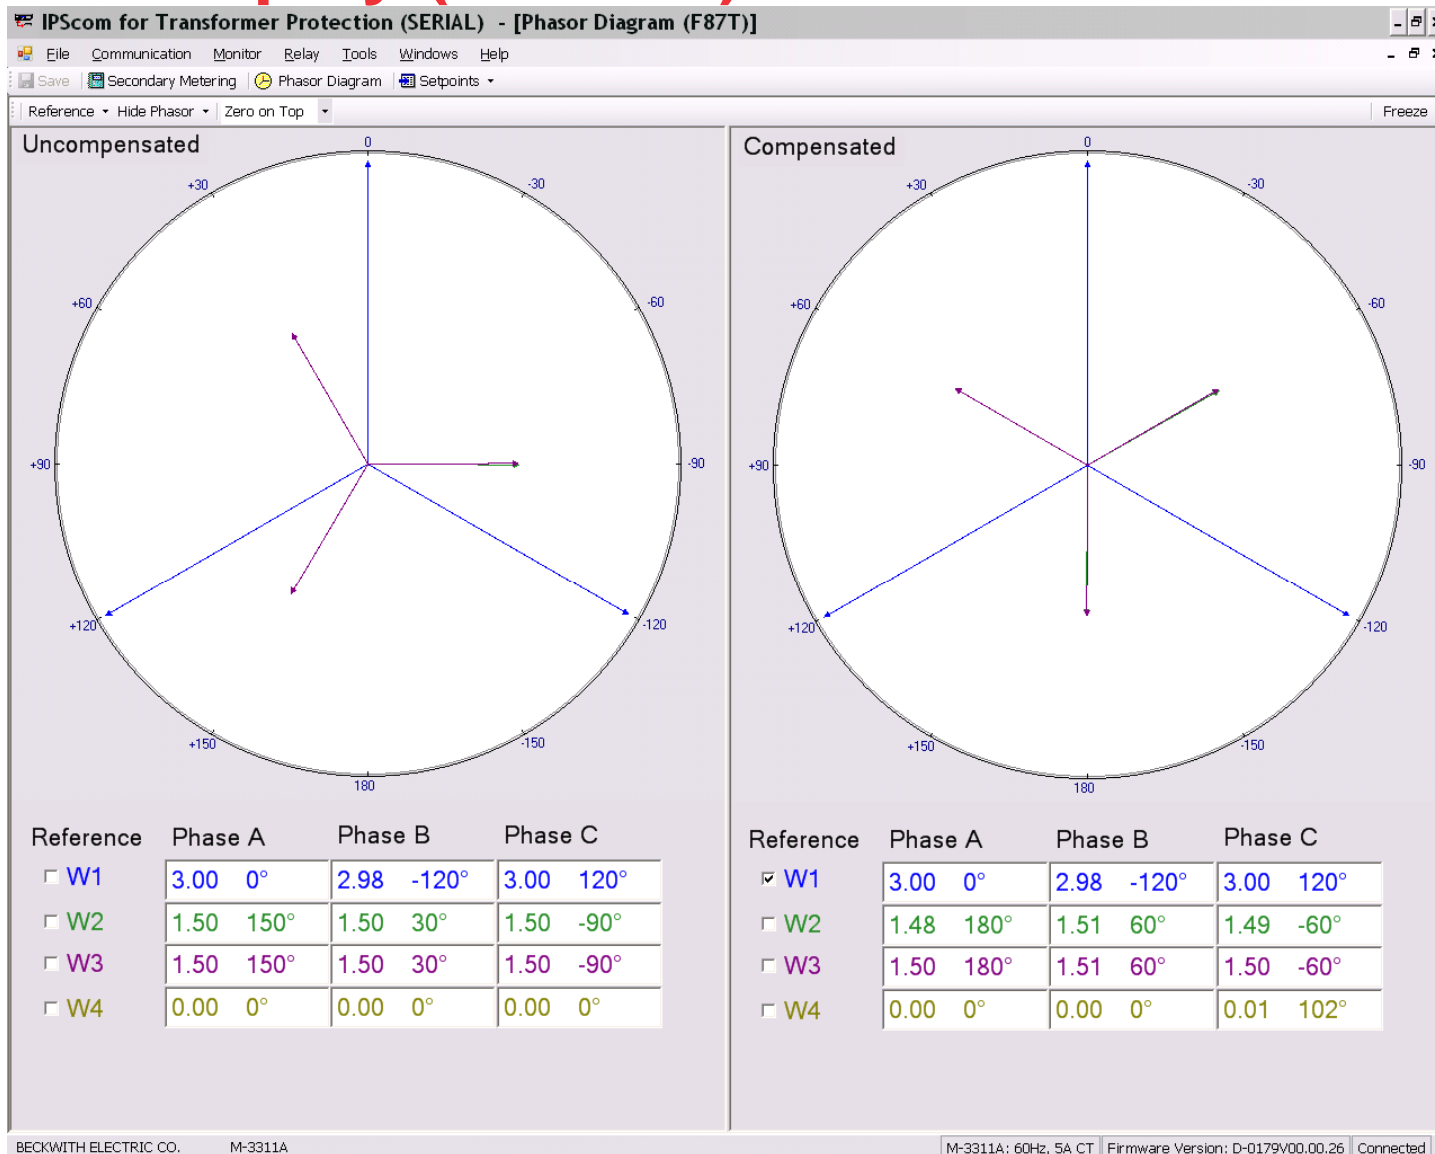


Oscillography Uses




- Speed transformer's return to service if event is not an internal fault
 - Identify type of testing needed
 - In the transformer or system?
 - Provide data to transformer manufacturer if asset health is in question
- Determine if relay and circuit breaker operated properly
 - Identify relay, control or breaker problem
- Uncovers unexpected problems
 - Settings
- Comtrade Oscillographs (*.cfg)

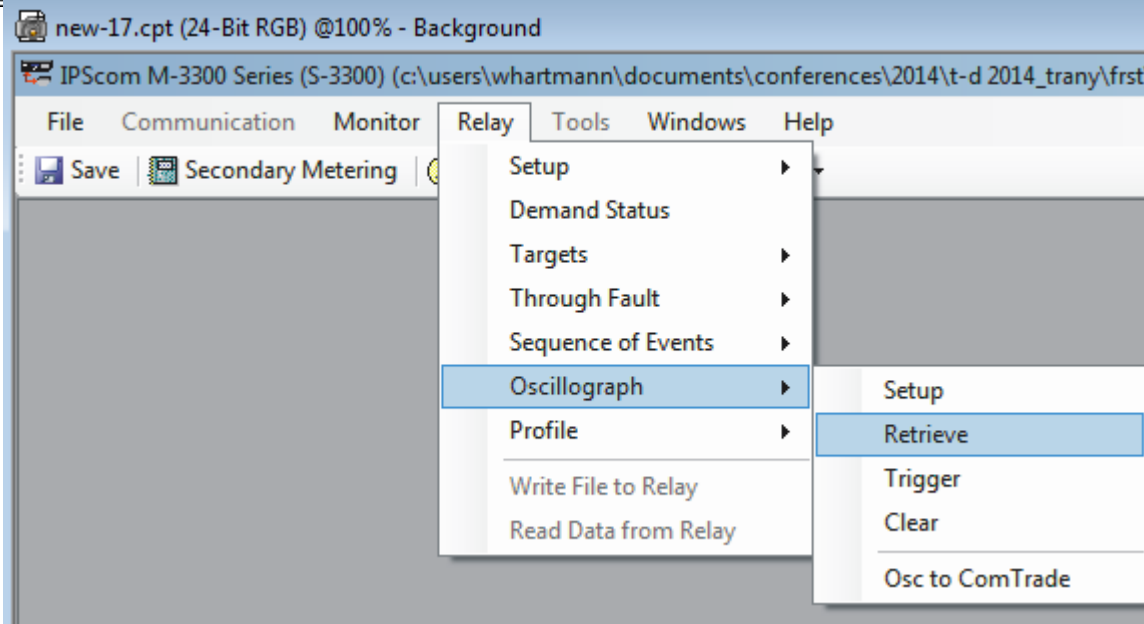


**Retrieve
Oscillographic
Record**

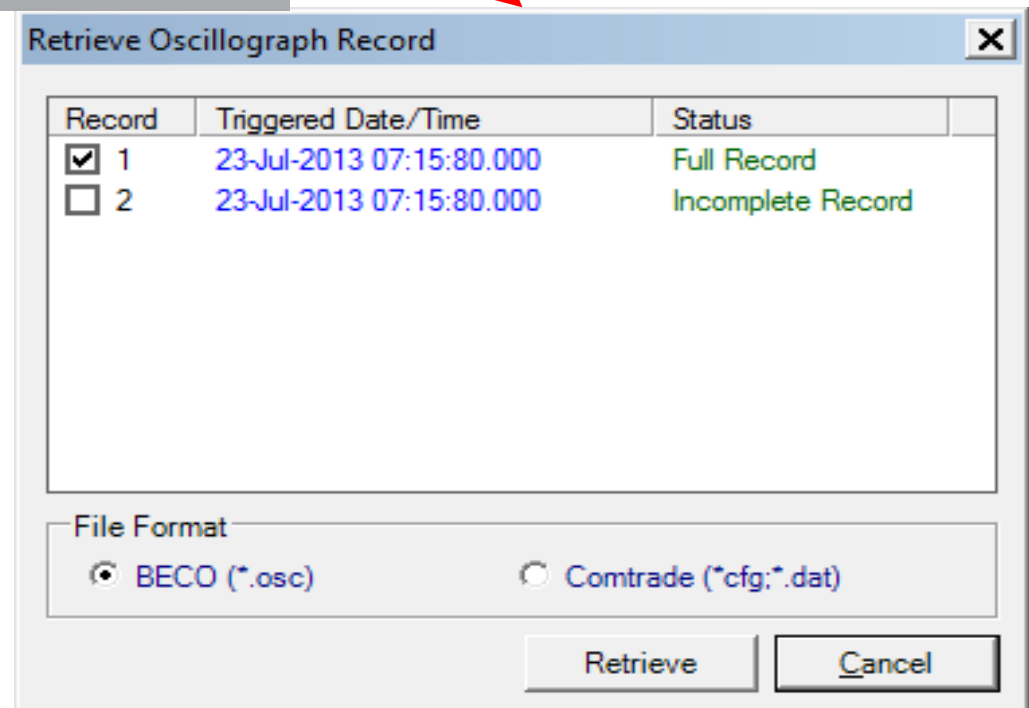

Opening an Oscillographic File (*.cfg or *.ocs)

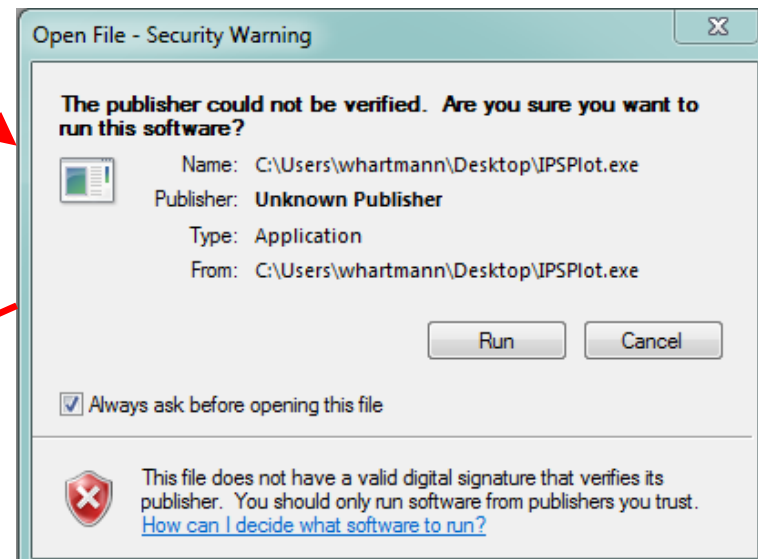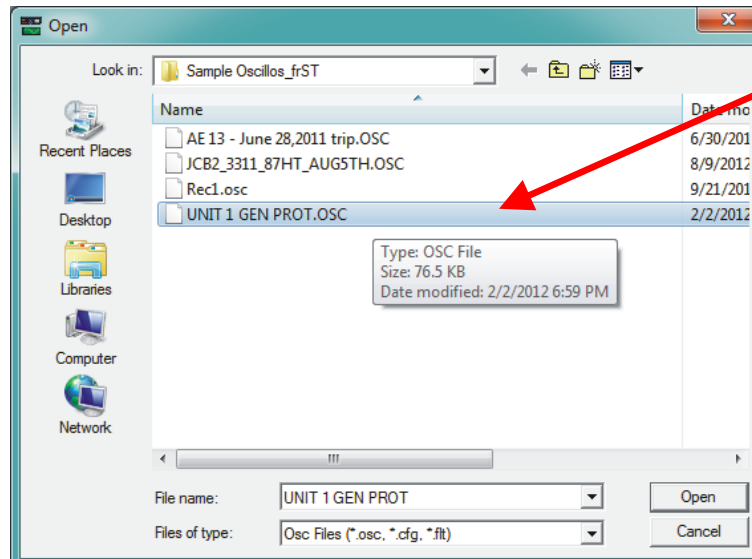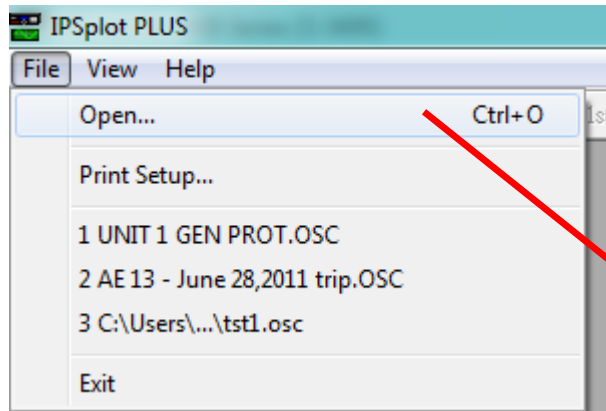

Waveform Capture

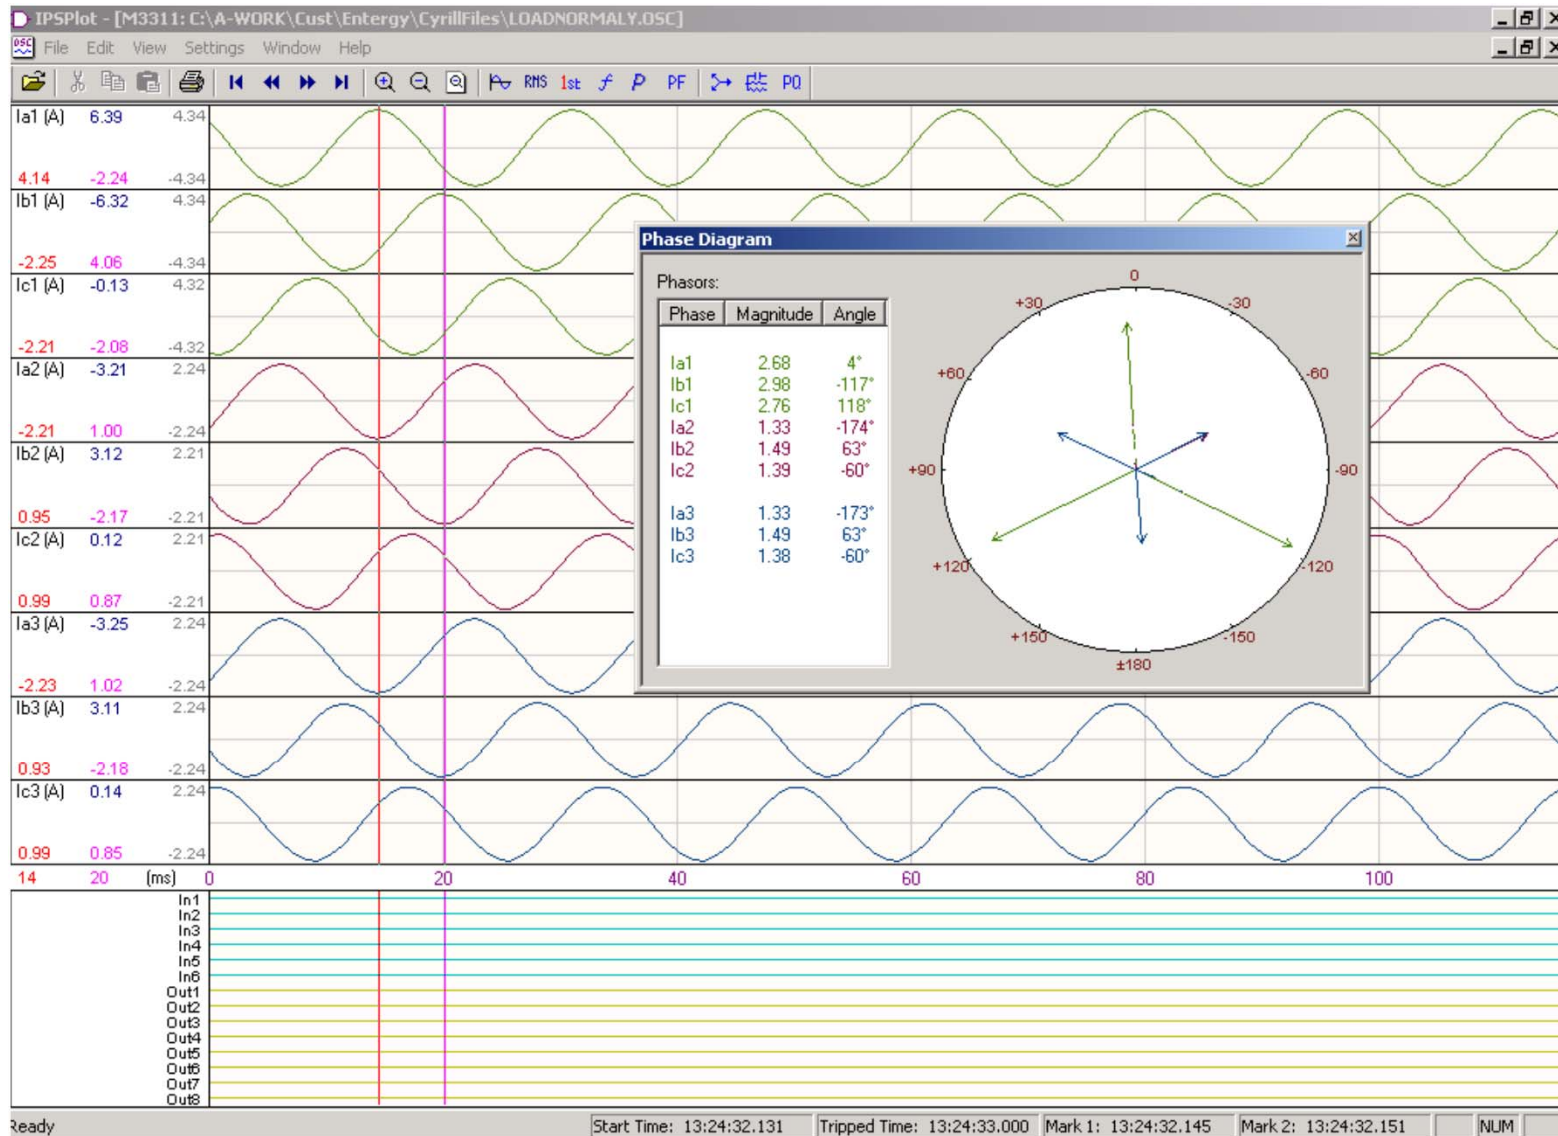

Test and Commissioning



Commissioning Tasks

- PAT
 - Panel Acceptance Test
 - Test from the panel terminal blocks to the relay
 - Includes test switches
- SAT
 - Site Acceptance Test
 - Take successful PAT panel, and test with:
 - Secondary injection from CT termination cabinet at transformer/switchyard
 - Load pick up on transformer

Commissioning Tools

- Advanced Metering
 - Sequence components for all windings
 - Positive, negative and zero
- Restraint and differential currents
- Vector Metering
 - Uncompensated
 - Raw signal
 - Compensated
 - Post vector and ratio corrections
- Digital Oscillography
 - All winding currents

Commissioning Examples


- Y-Y-Y, yyy, normal load flow
- Y-Y-Y, yyy, rolled A-phase on W2
- Δ -Y-Y, yyy, normal load flow
- Δ -Y-Y, yyy, rolled A-phase on W1
- Δ -Y-Y, yyy, rolled C-phase on W1

Details

- Used test equipment to simulate 3 winding transformers of various winding and CT configurations
- Injected 3A into W1, injected 1.5A into W2 and W3 to simulate load flow
- Assumed 1:1 transformer and 1:1 CTs for easy viewing of principles
- Created correct “base case”
- Created incorrect case
- Used advanced protection system tools to “diagnose” the incorrect issue

Y:Y:Y, yyy, 1:1 Ratio,
1:1 CTs, Normal


Three Line: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Normal

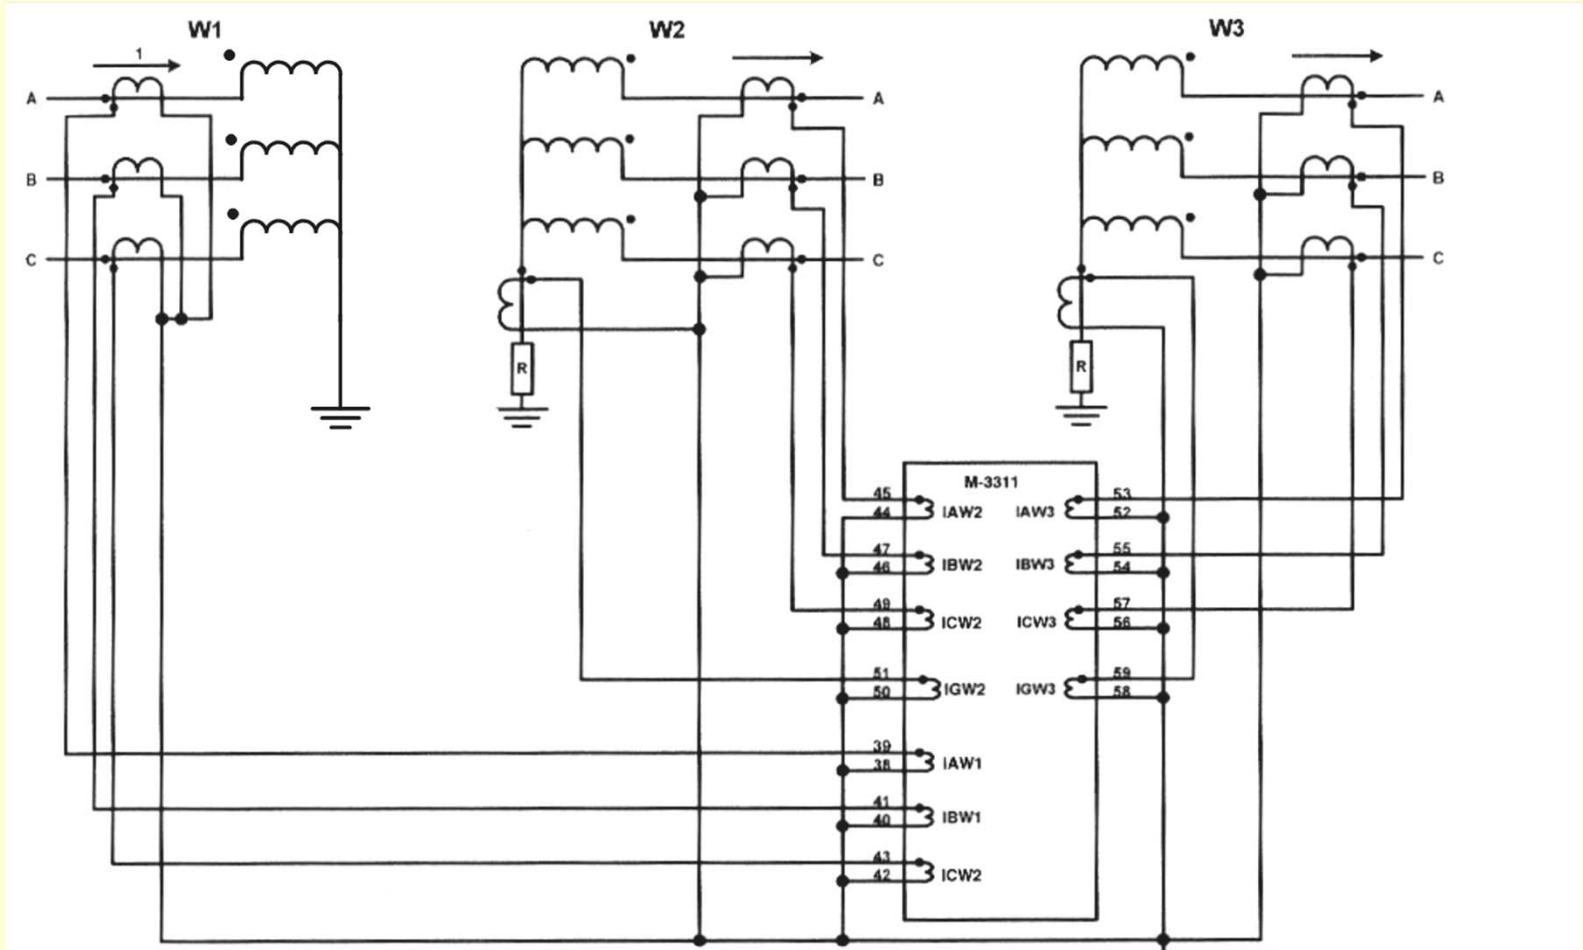

Advanced Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Normal

Low levels of negative and zero sequence current


High level of positive sequence current

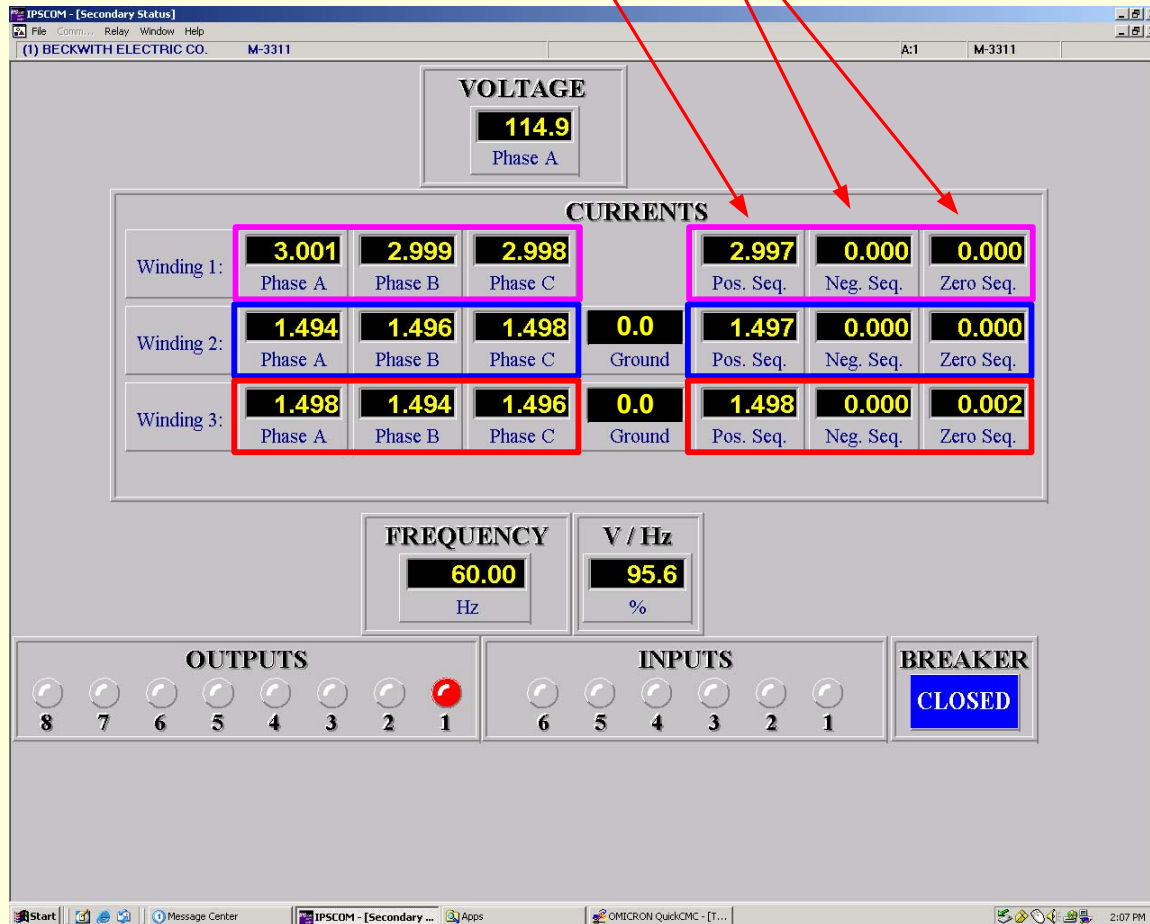

Advanced Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Normal


Very low differential current

Very high restraint current

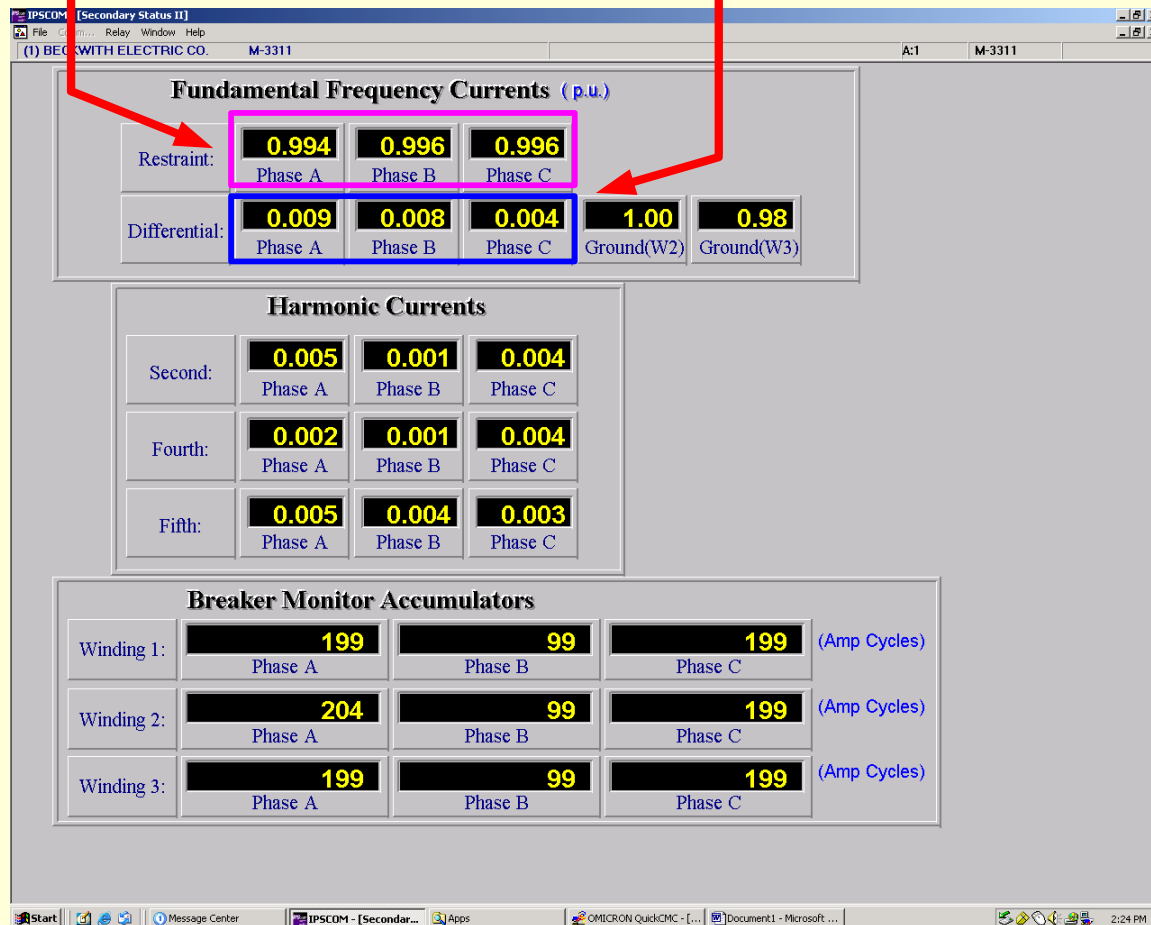


Vector Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Normal

W1, Phase A at 0 degrees
W2, Phase A at 180 degrees
W3, Phase A at 180 degrees

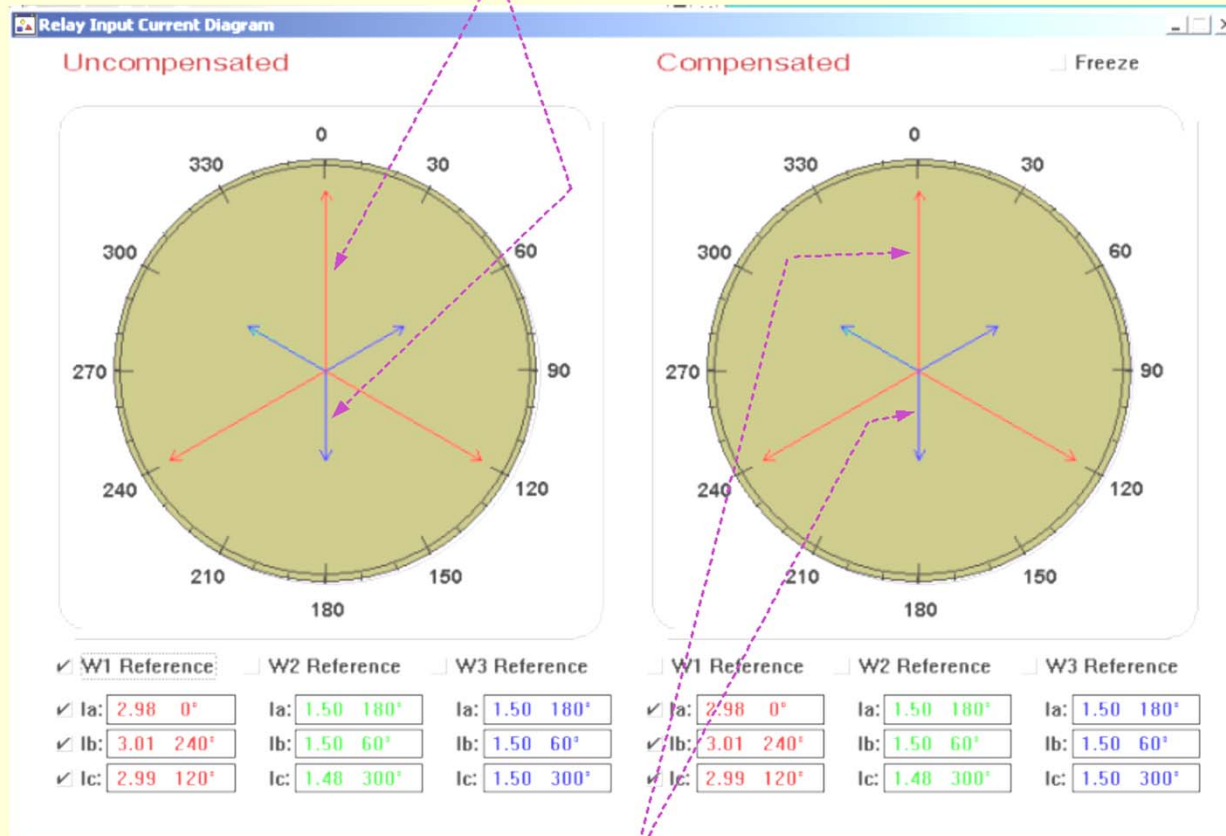


W1, Phase A at 0 degrees
W2, Phase A at 180 degrees
W3, Phase A at 180 degrees

Digital Oscillography: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Normal

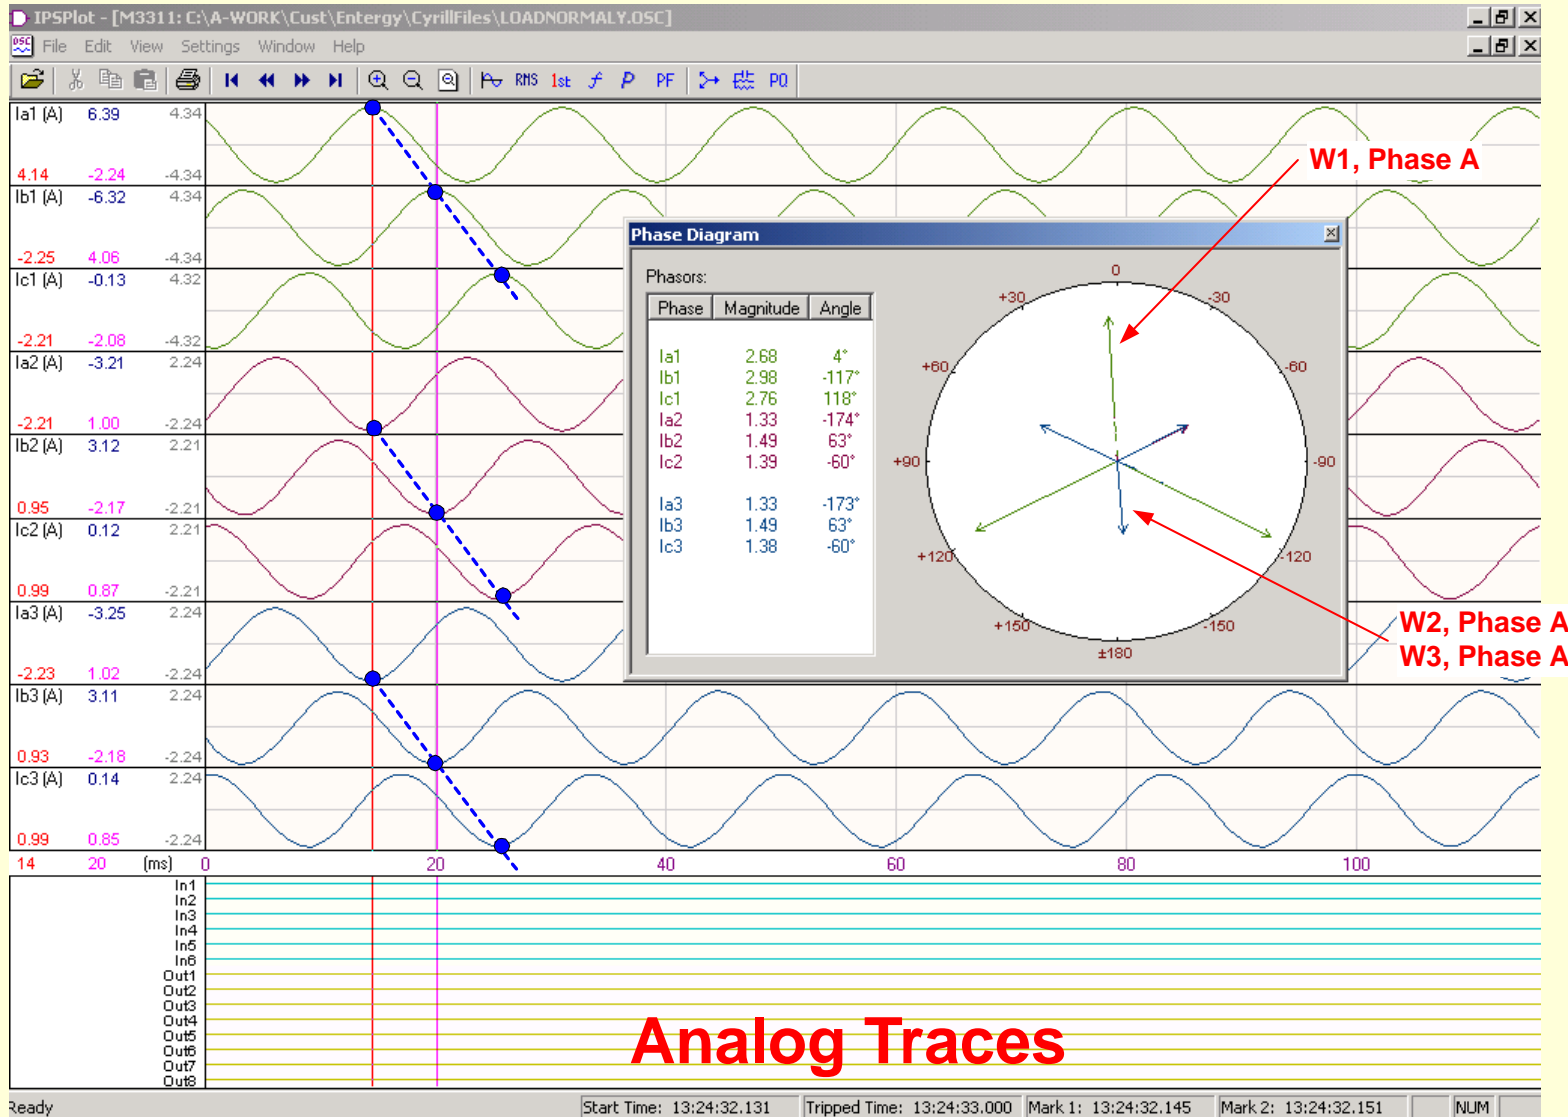


Y:Y:Y, yyy, 1:1 Ratio, 1:1 CTs,
Roll W2, ØA

Three Line: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Roll ØA, W2

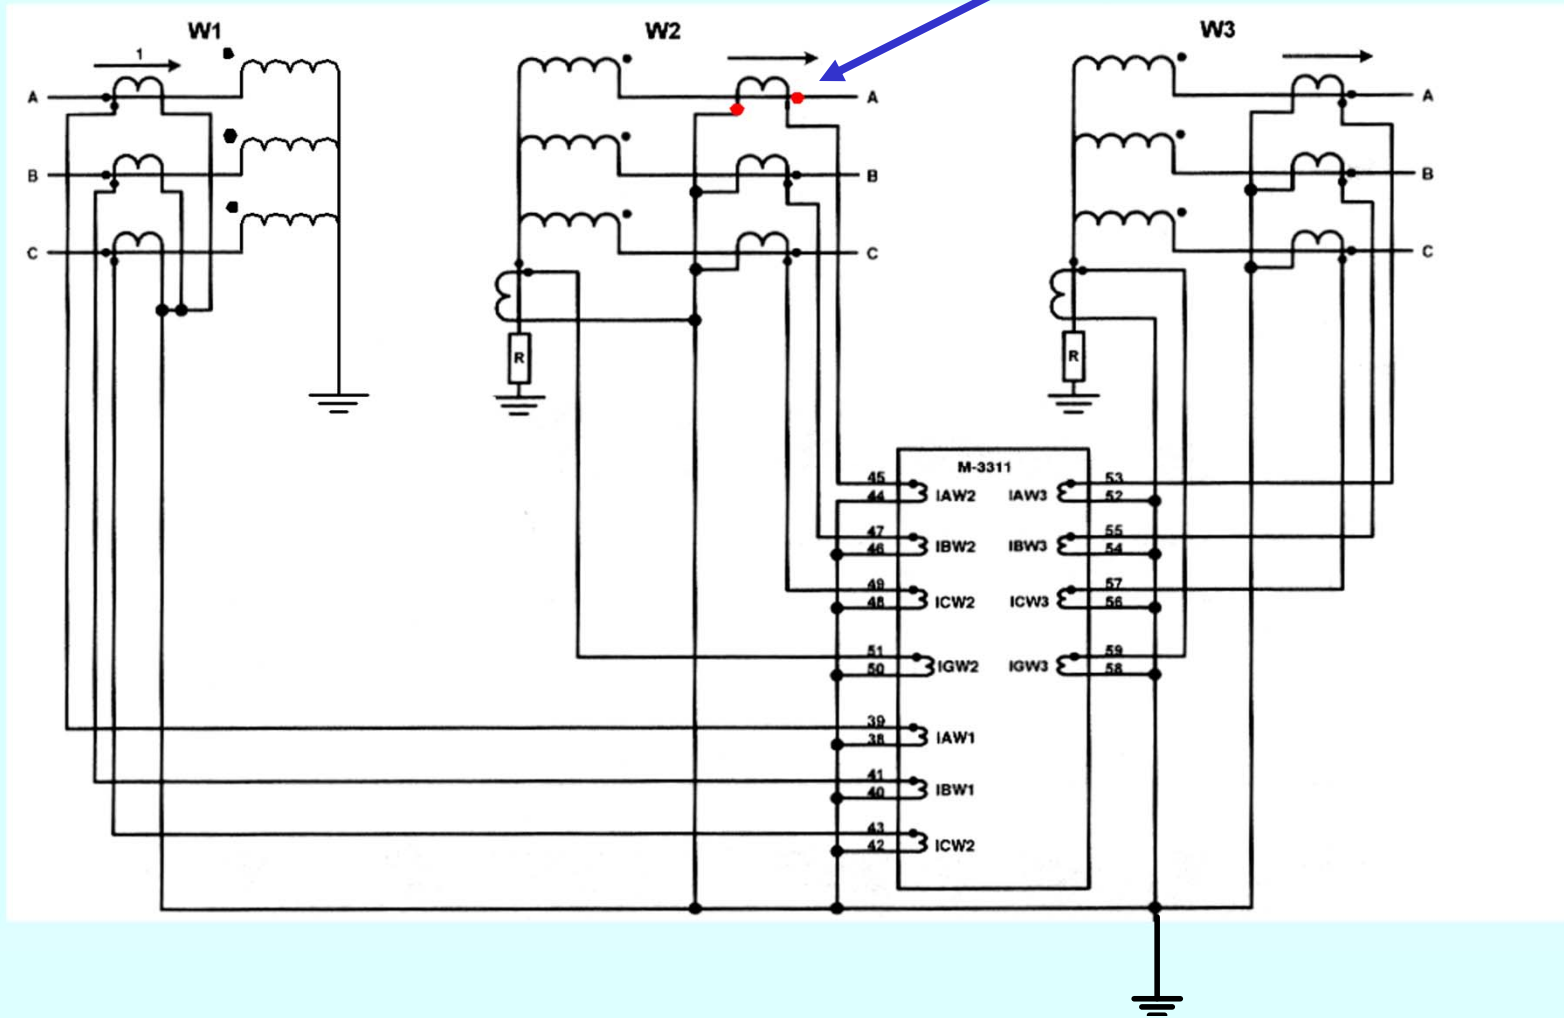

Advanced Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Roll ØA, W2


High level of positive
sequence current

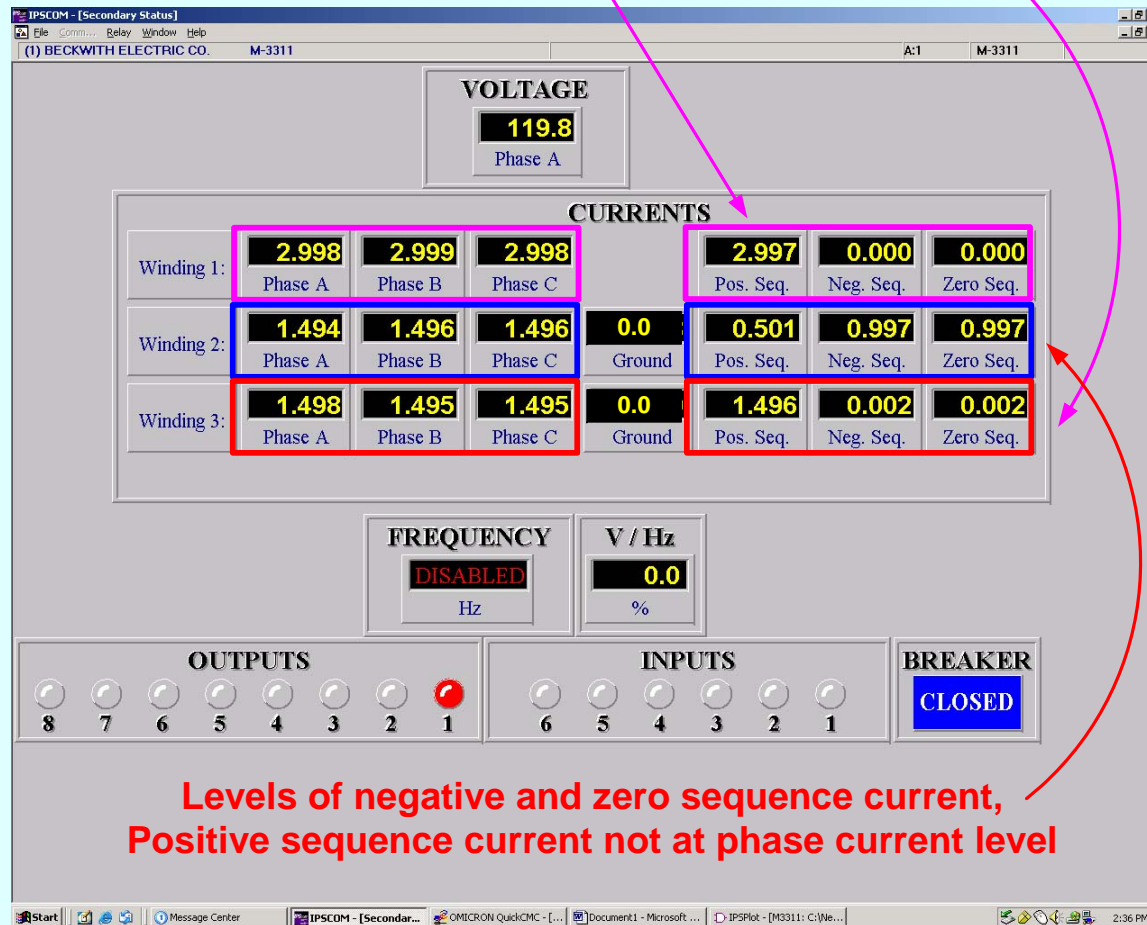

Advanced Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Roll ØA, W2


High differential current

Restraint current less than through current

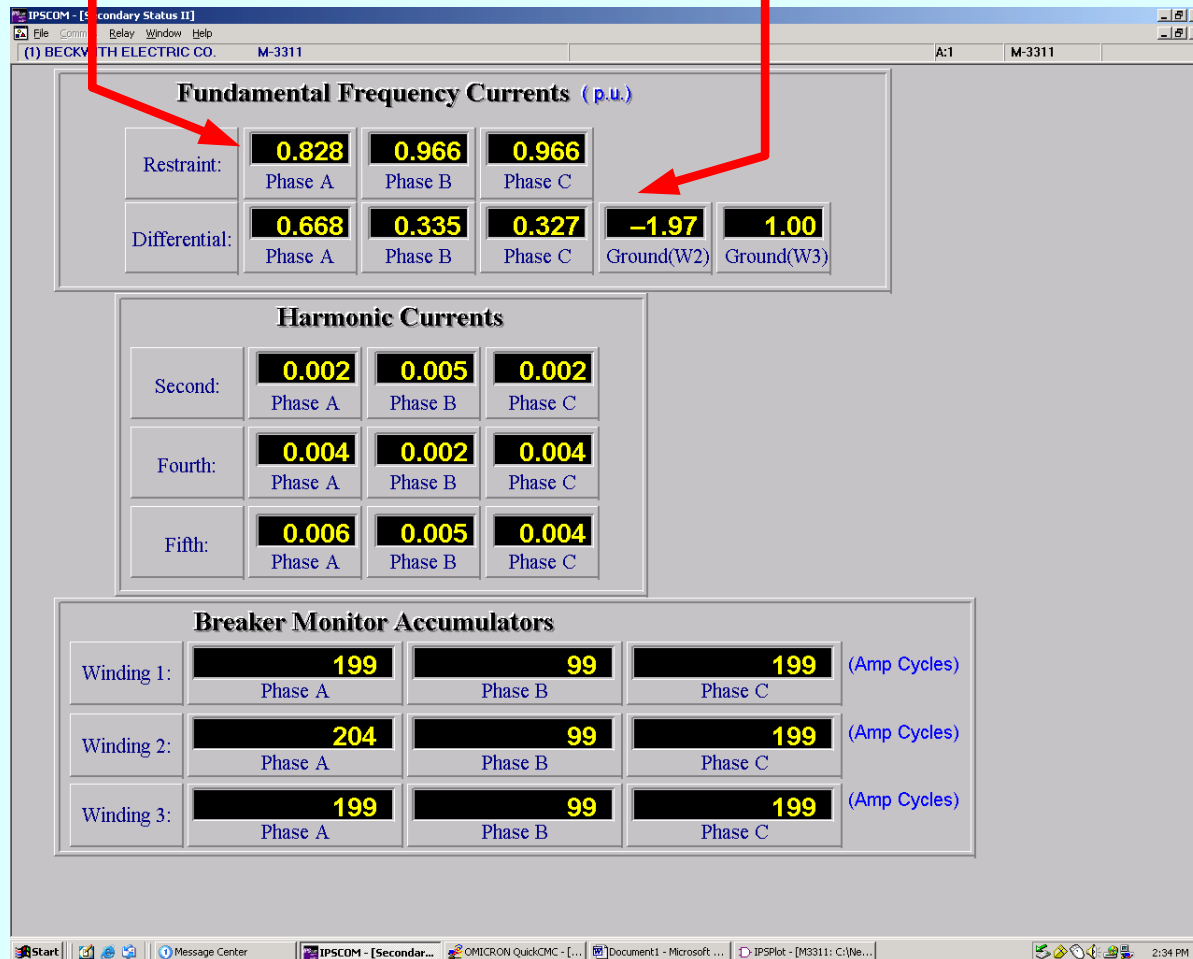


Vector Metering: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Roll ØA, W2

W1, Phase A at 0 degrees
 W2, Phase A at 0 degrees (180)
 W3, Phase A at 180 degrees

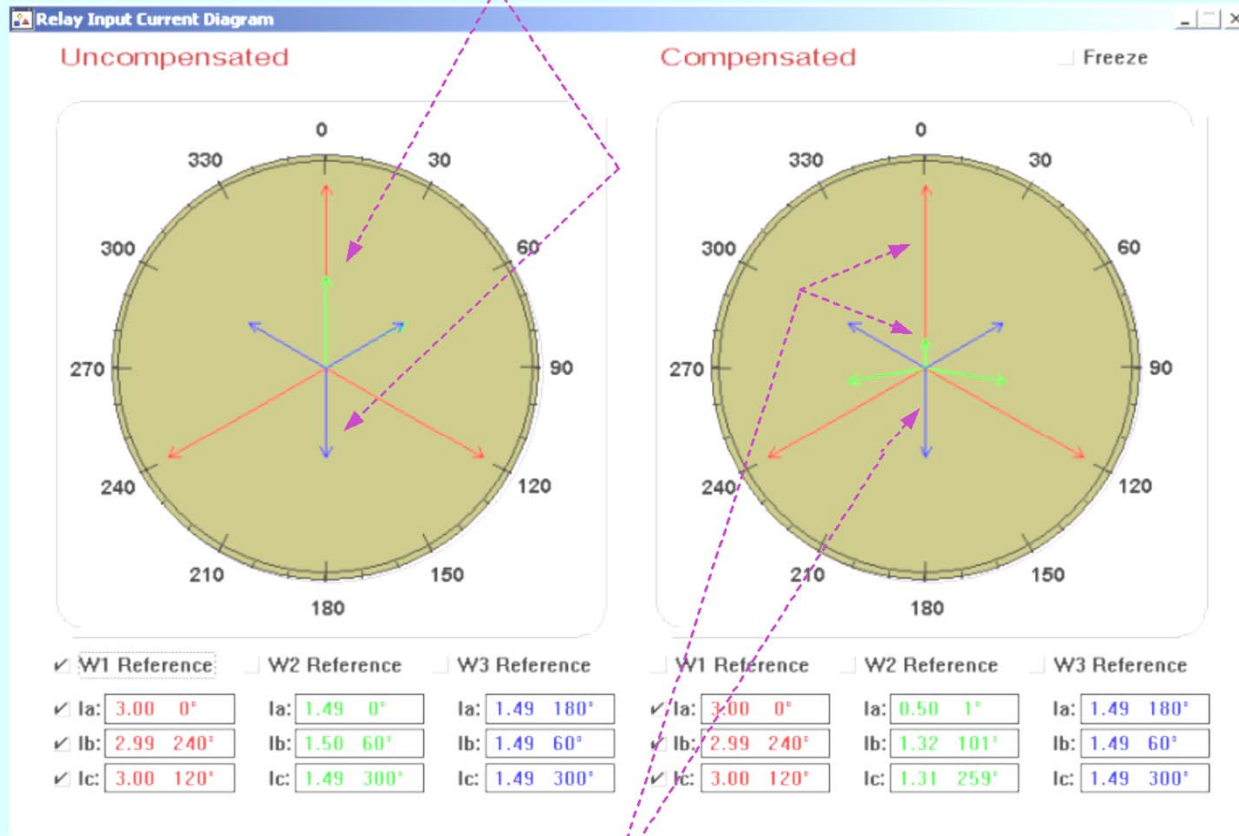


W1, Phase A at 0 degrees
 W2, Phase A at 0 degrees (180)
 W3, Phase A at 180 degrees

Digital Oscillography: Y:Y:Y, 1:1 Ratio, 1:1 CTs, Roll ØA, W2

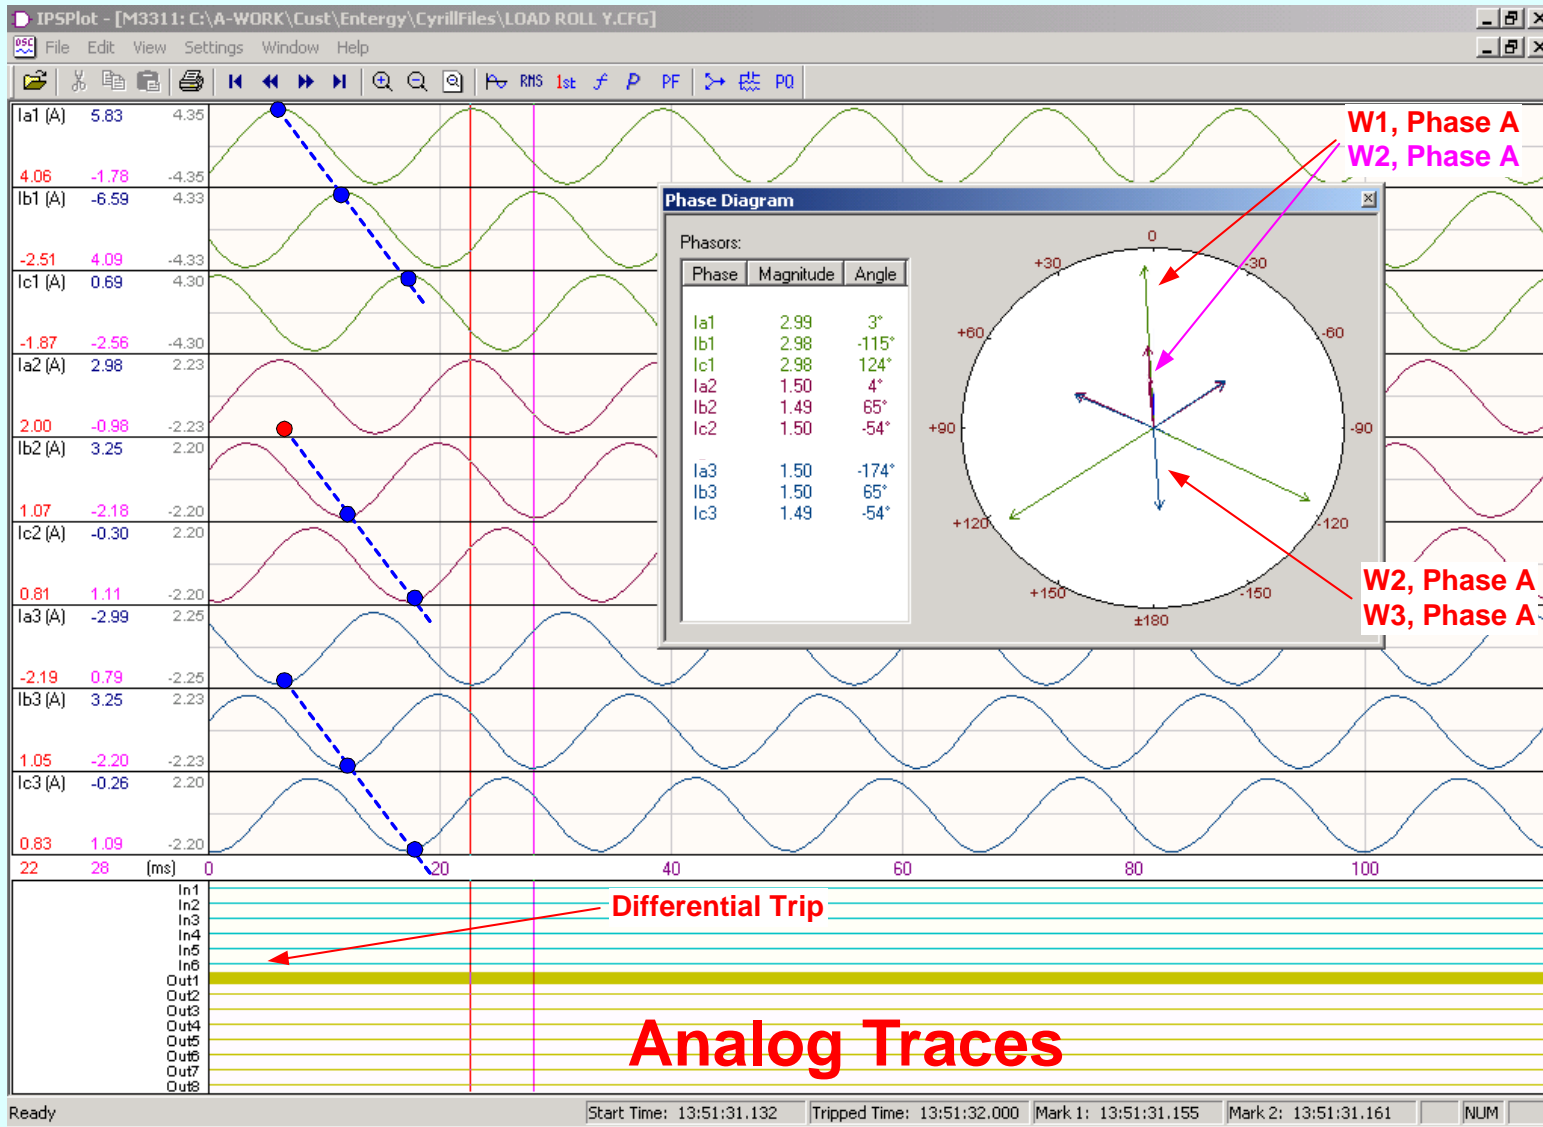

$\Delta:Y:Y$, yyy , 1:1 Ratio,
1:1 CTs, Normal


Three Line: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, Normal

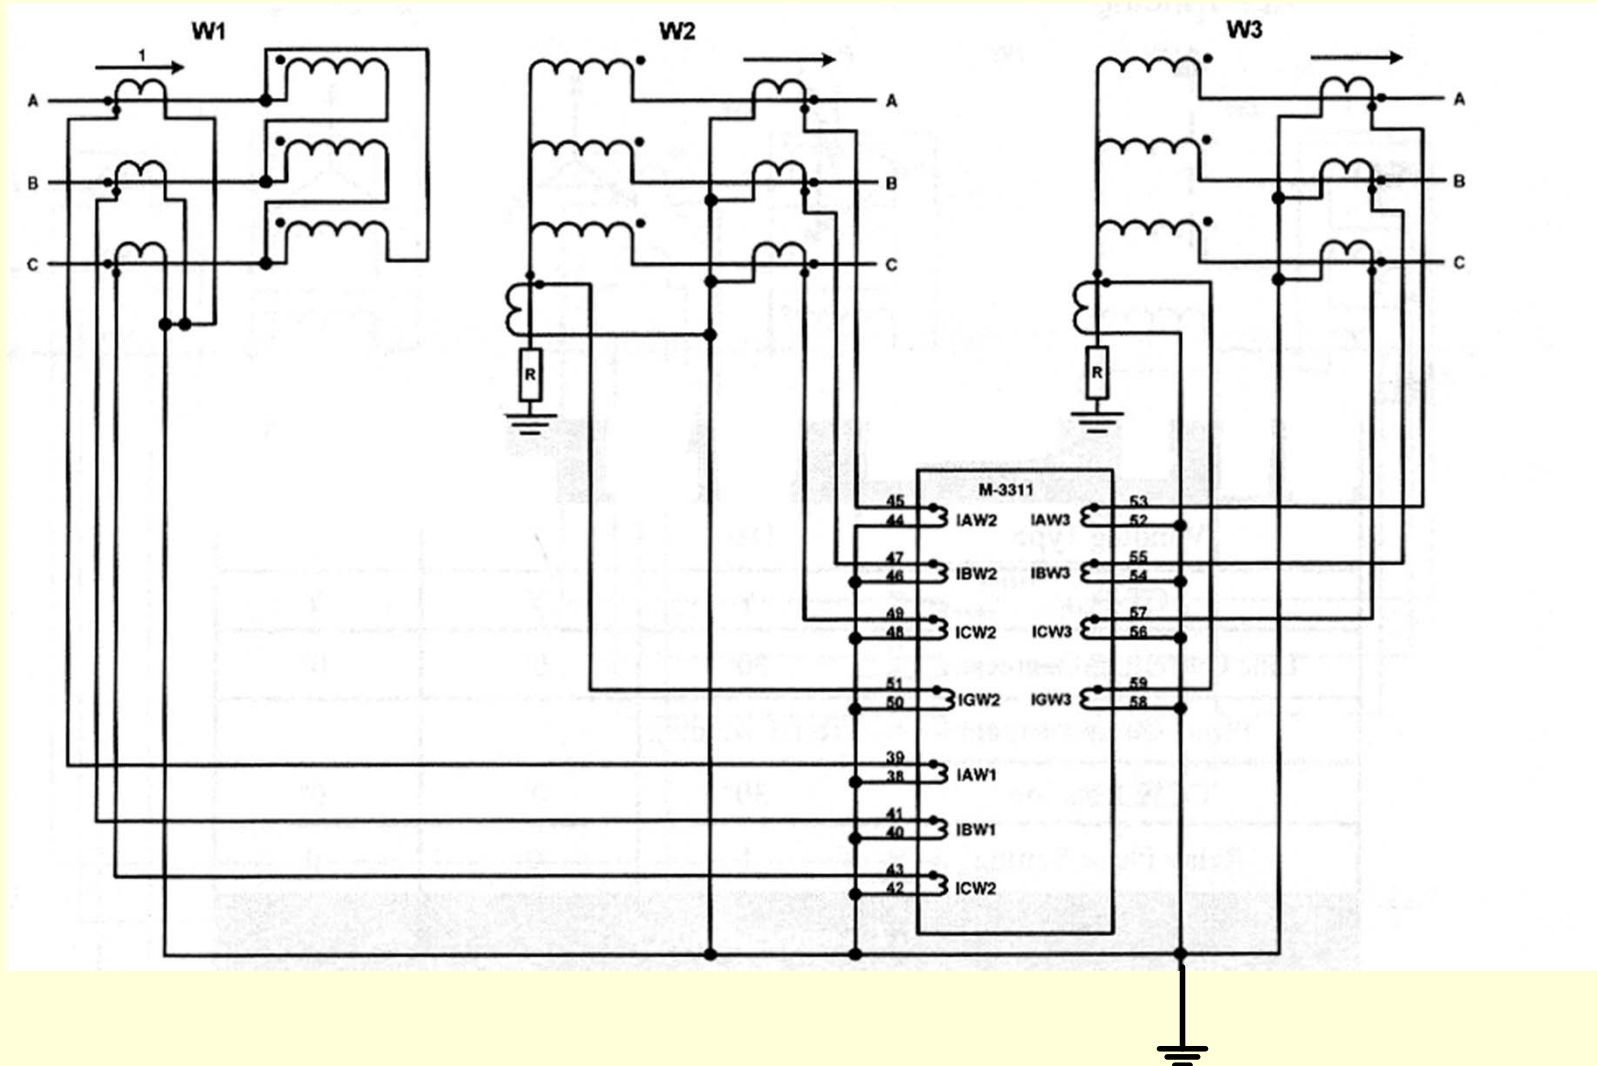

Advanced Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, Normal

Low levels of negative and zero sequence current


High level of positive sequence current

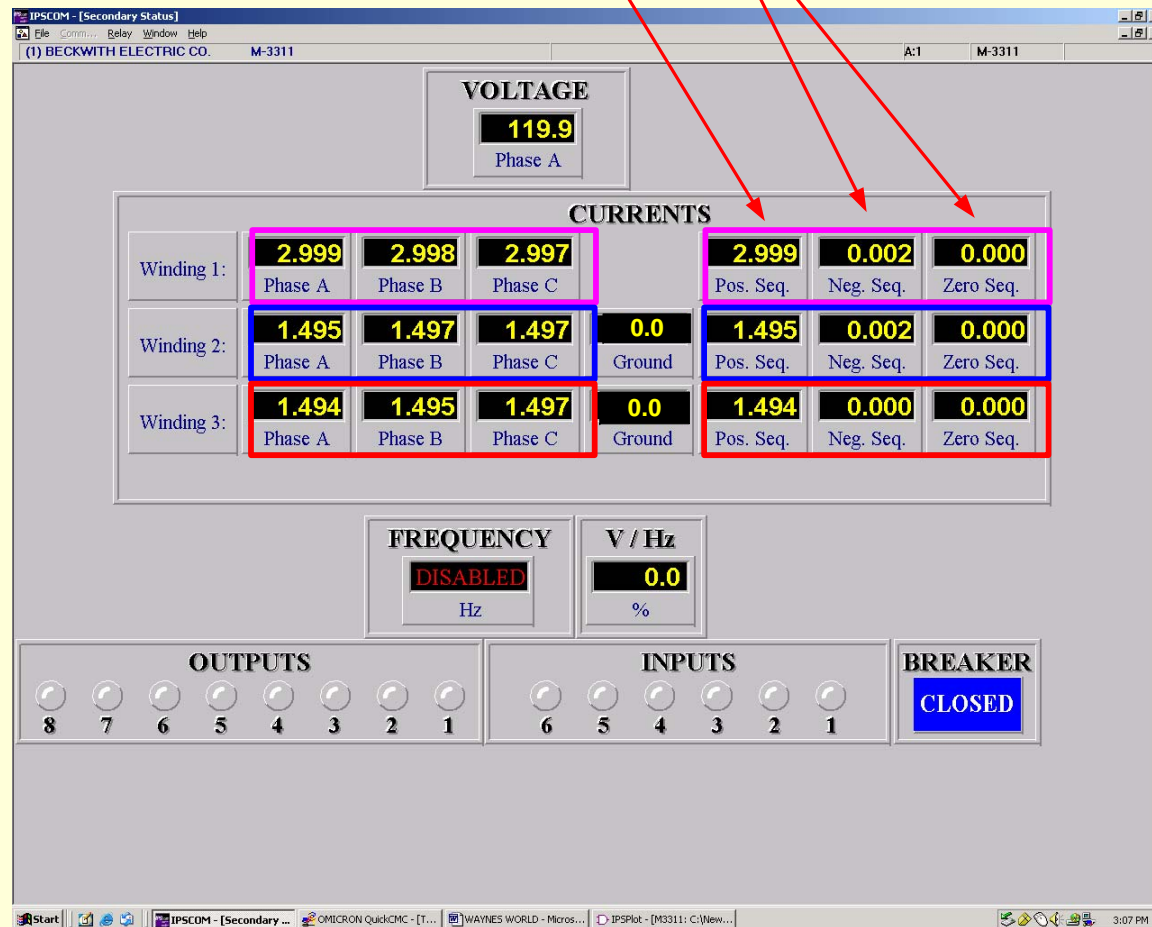

Advanced Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, Normal


Very low differential current

Very high restraint current

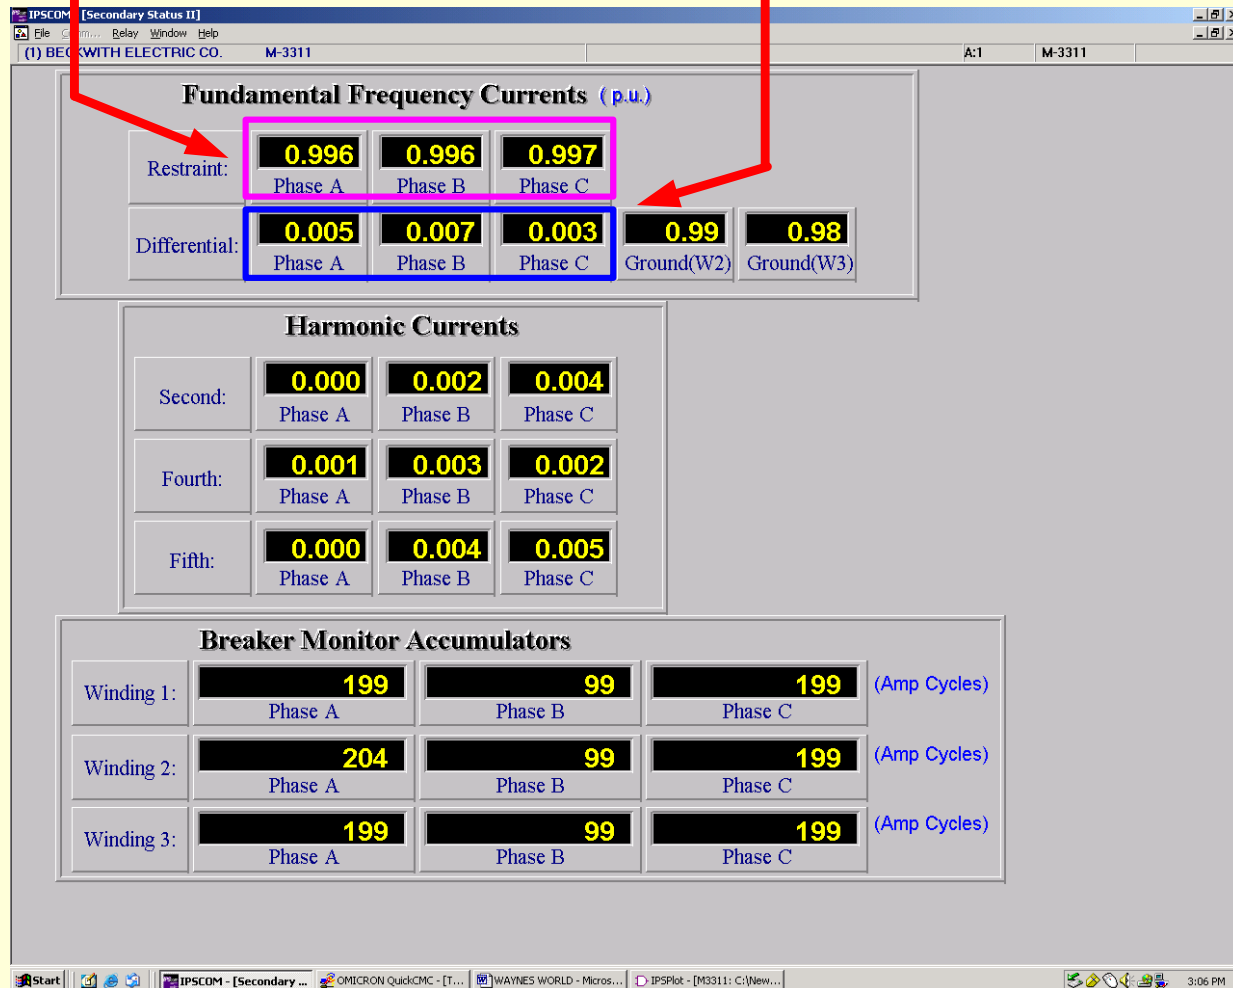


Vector Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, Normal

W1, Phase A at 0 degrees
 W2, Phase A at 30 degrees
 W3, Phase A at 30 degrees

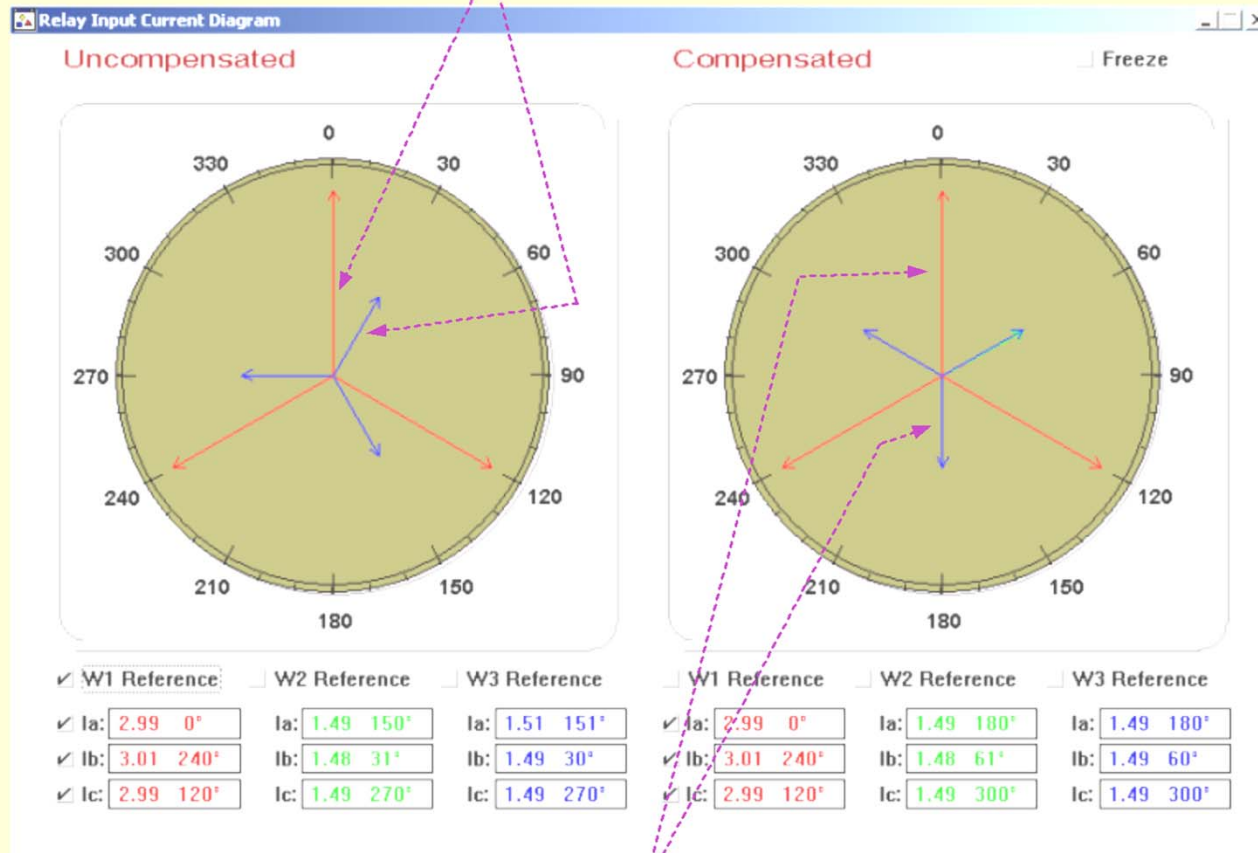

W1, Phase A at 0 degrees
 W2, Phase A at 180 degrees
 W3, Phase A at 180 degrees


Digital Oscillography: Δ :Y:Y, 1:1 Ratio, 1:1 CTs, Normal

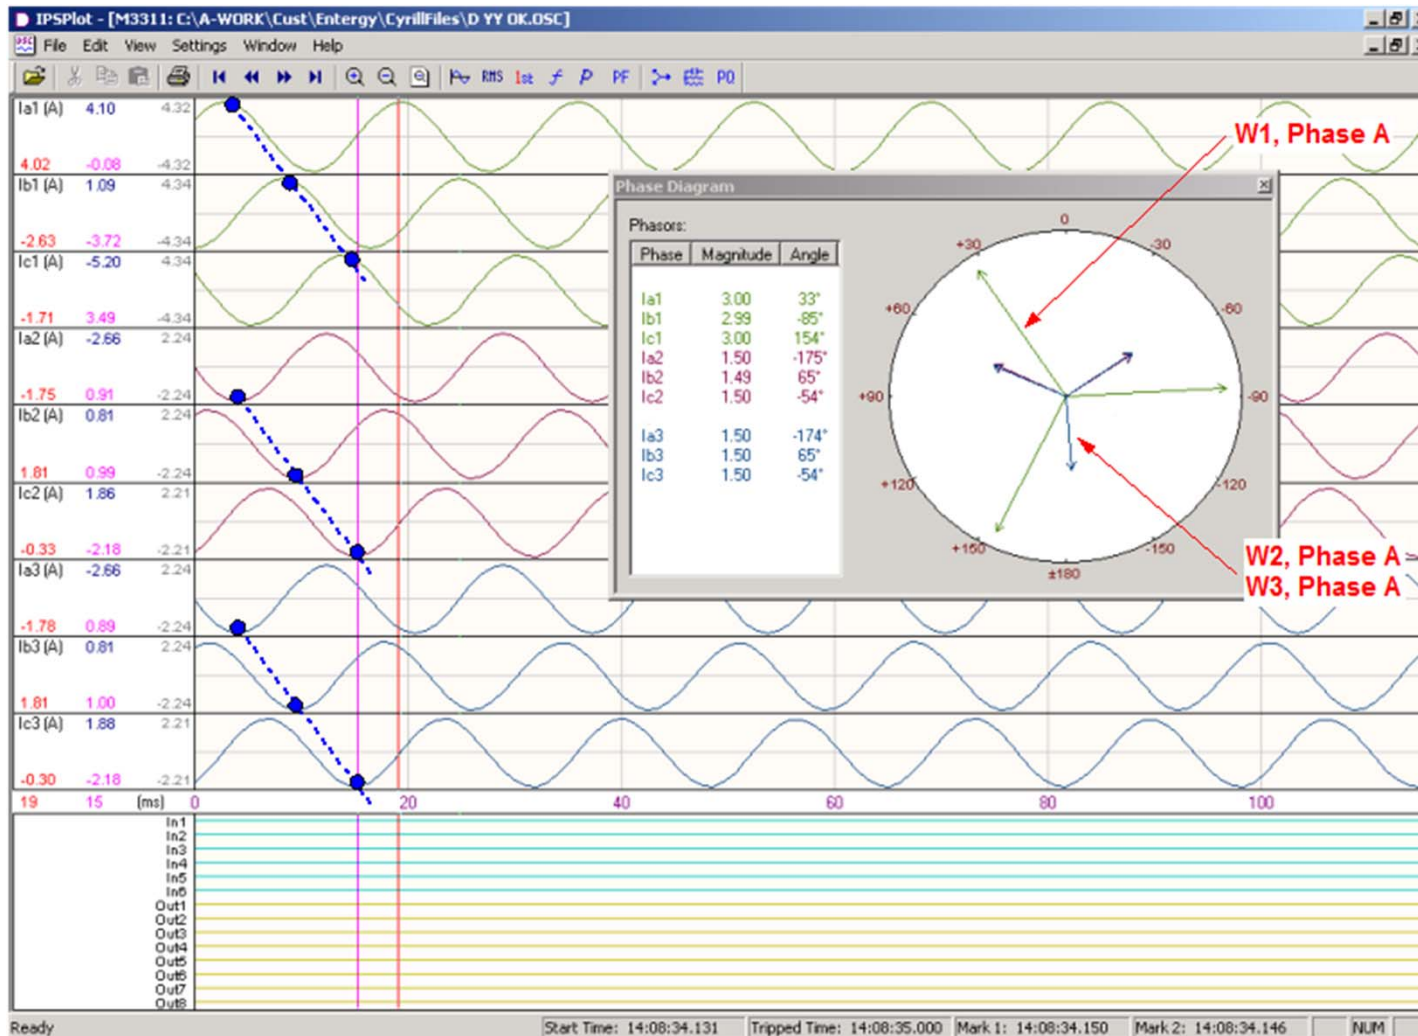

Analog Traces


$\Delta:Y:Y$, yyy , 1:1 Ratio,
1:1 CTs, Roll W1, $\emptyset A$

Three Line: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset A$

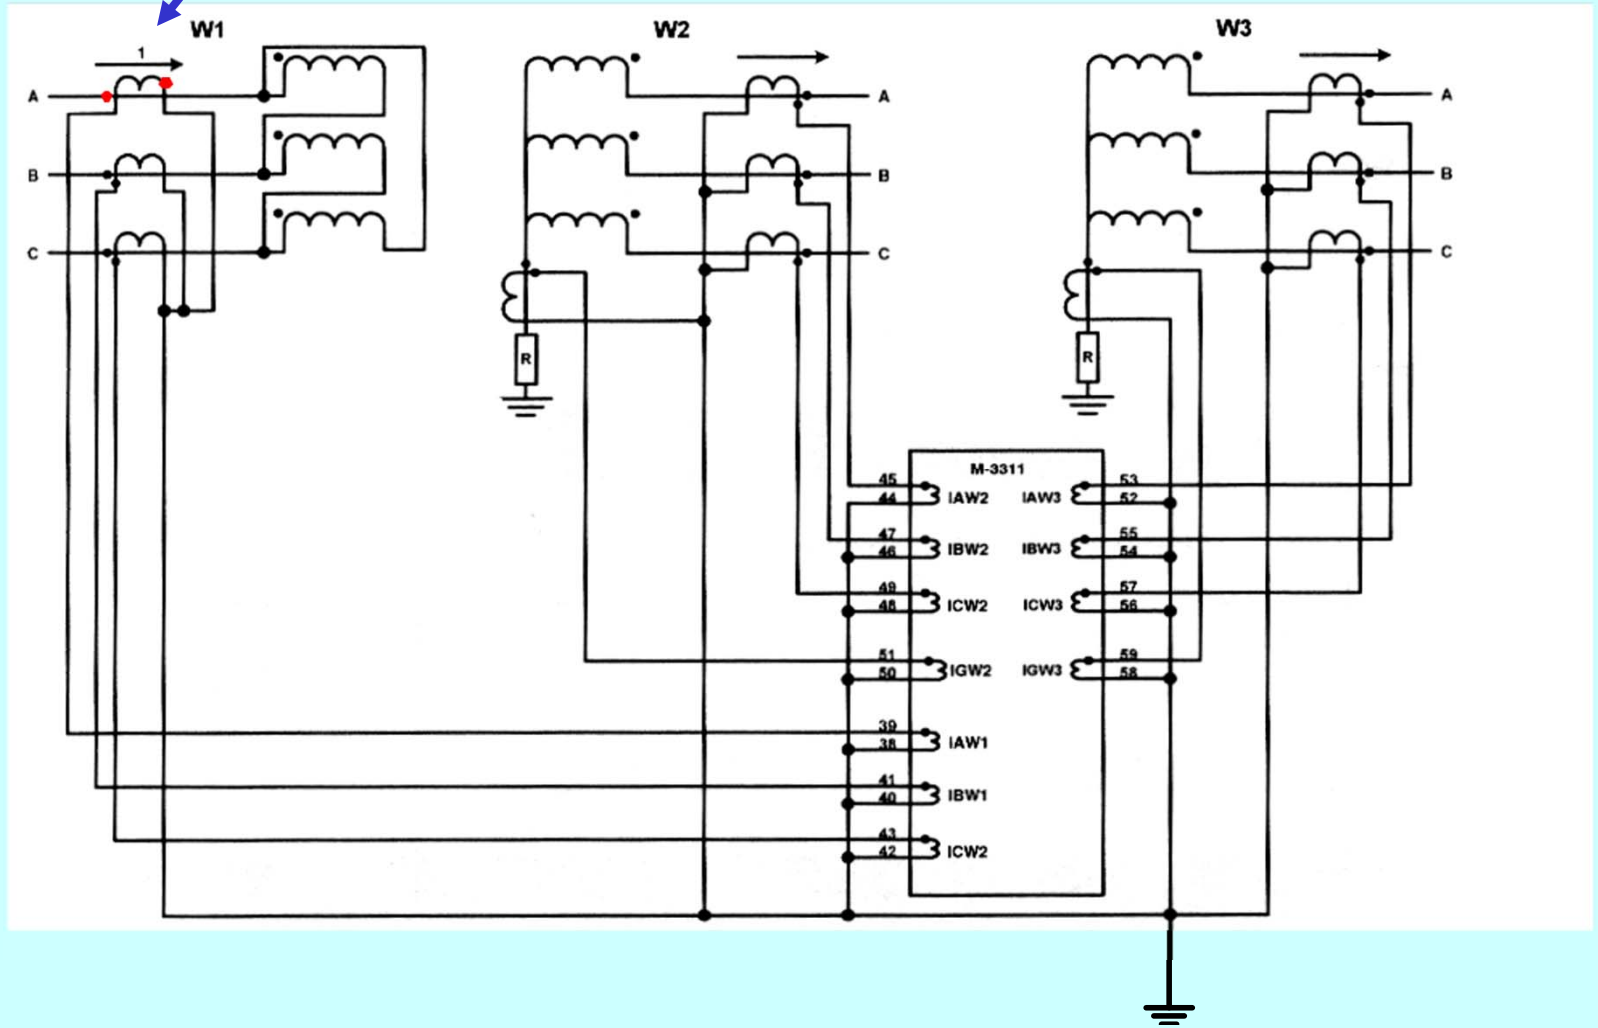

Advanced Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset A$

Levels of negative and zero sequence current,
 Positive sequence current not at phase current level

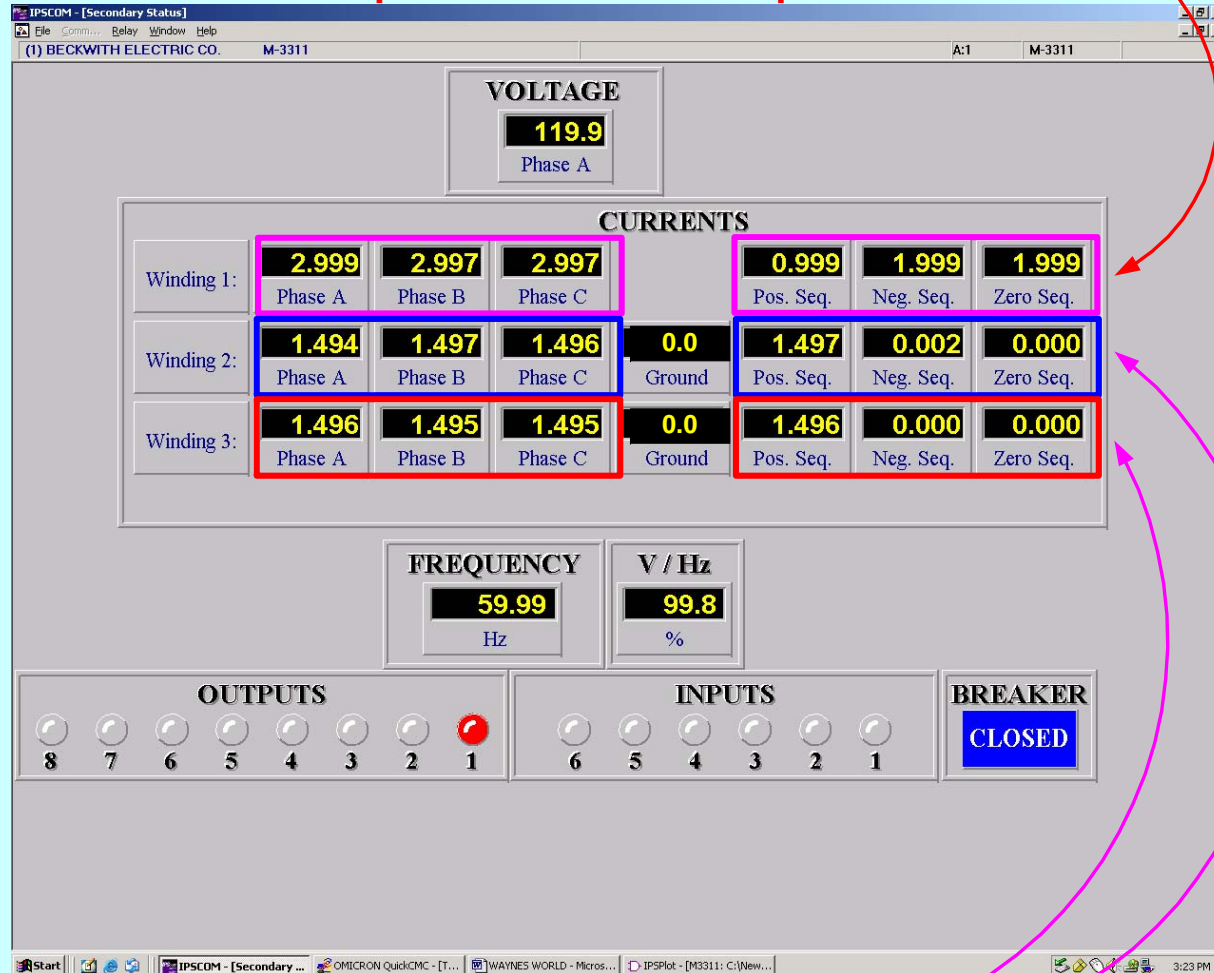


High level of positive sequence current

Advanced Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset A$

High differential current

Restraint current less than through current

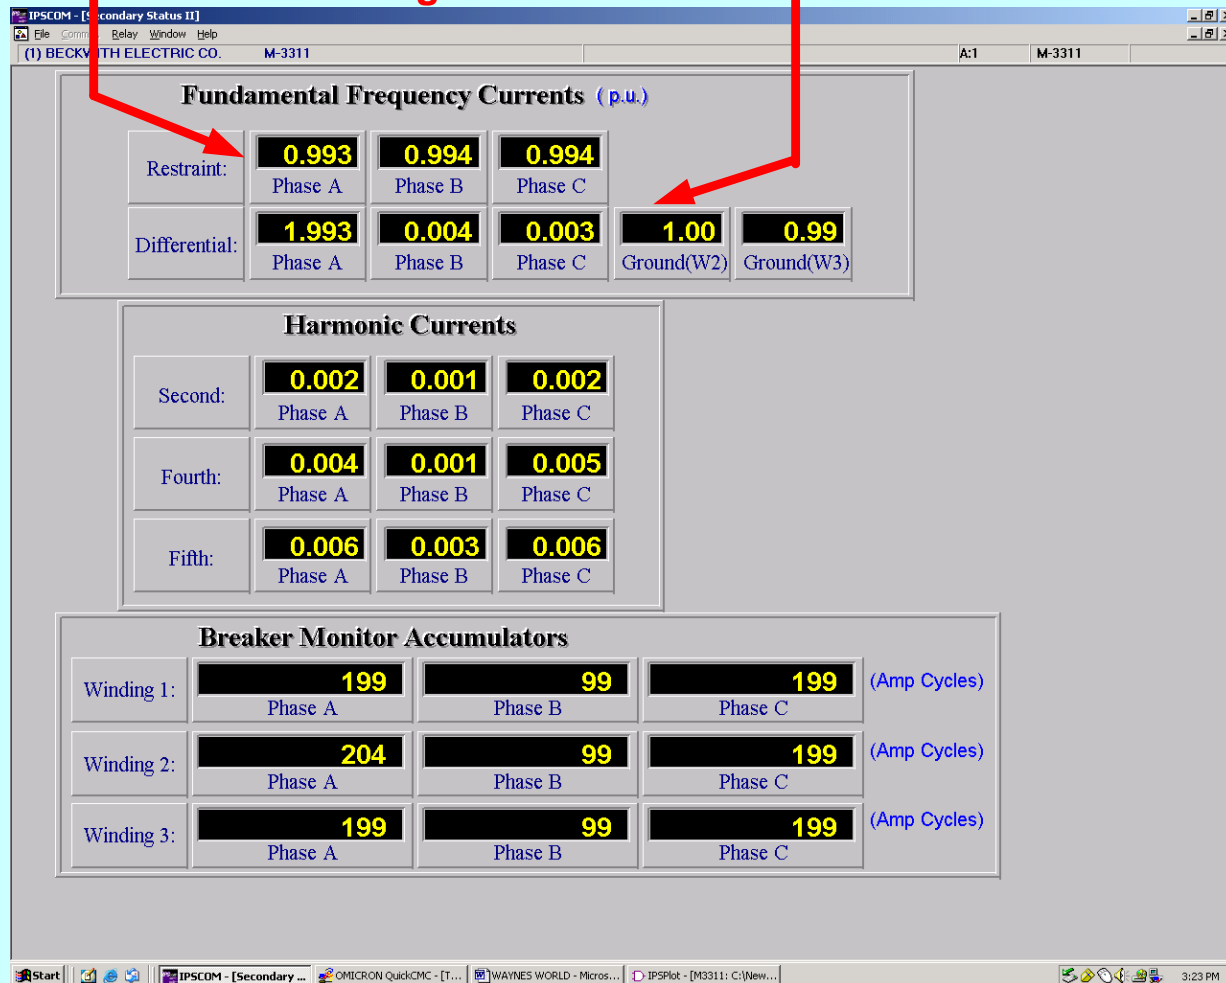


Vector Metering:

$\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset A$

W1, Phase A at 0 degrees (180)

W2, Phase A at 210 degrees

W3, Phase A at 210 degrees

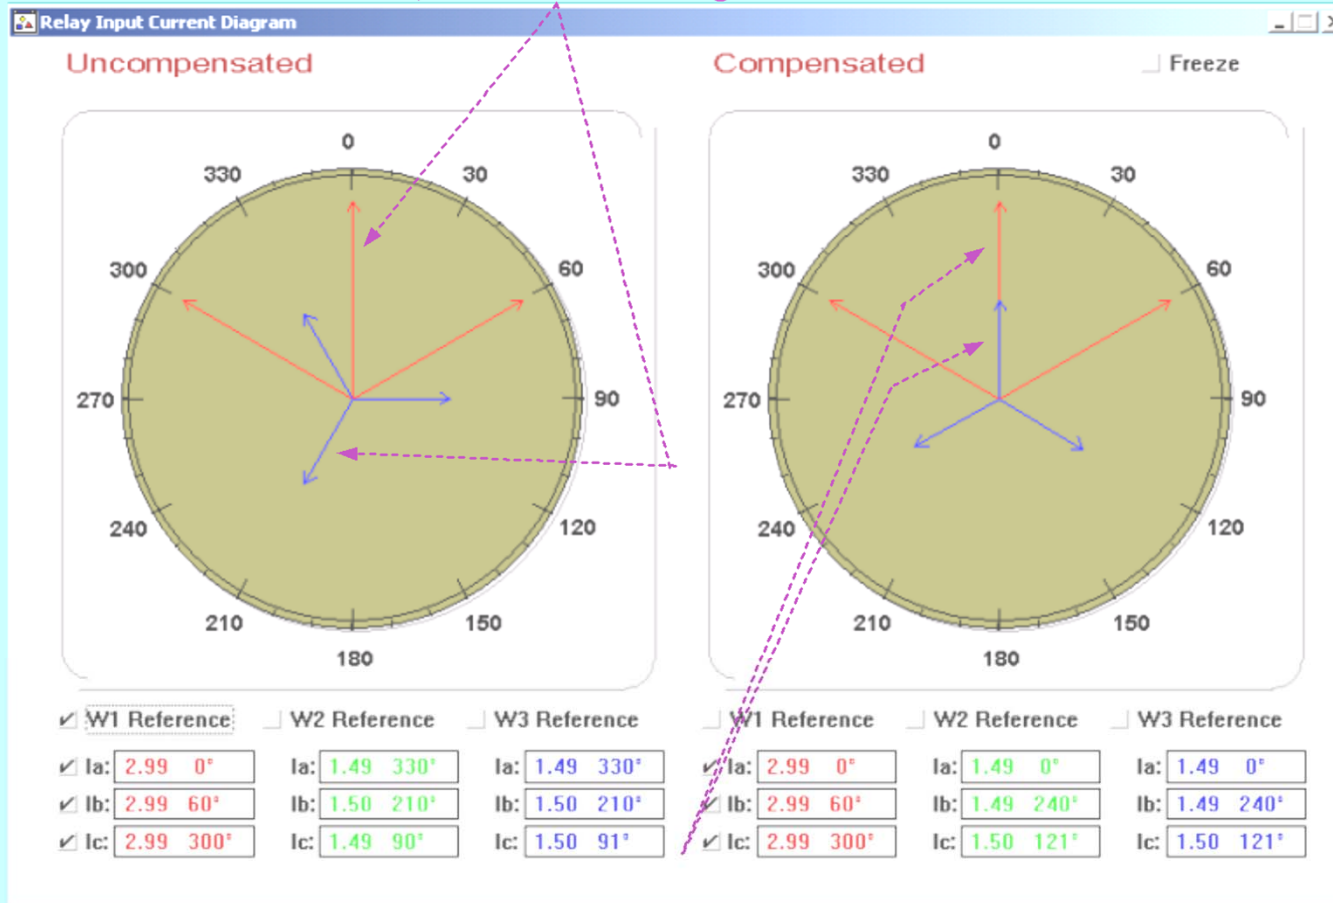


W1, Phase A at 0 degrees (180)

W2, Phase A at 0 degrees


W3, Phase A at 0 degrees

Digital Oscillography: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset A$

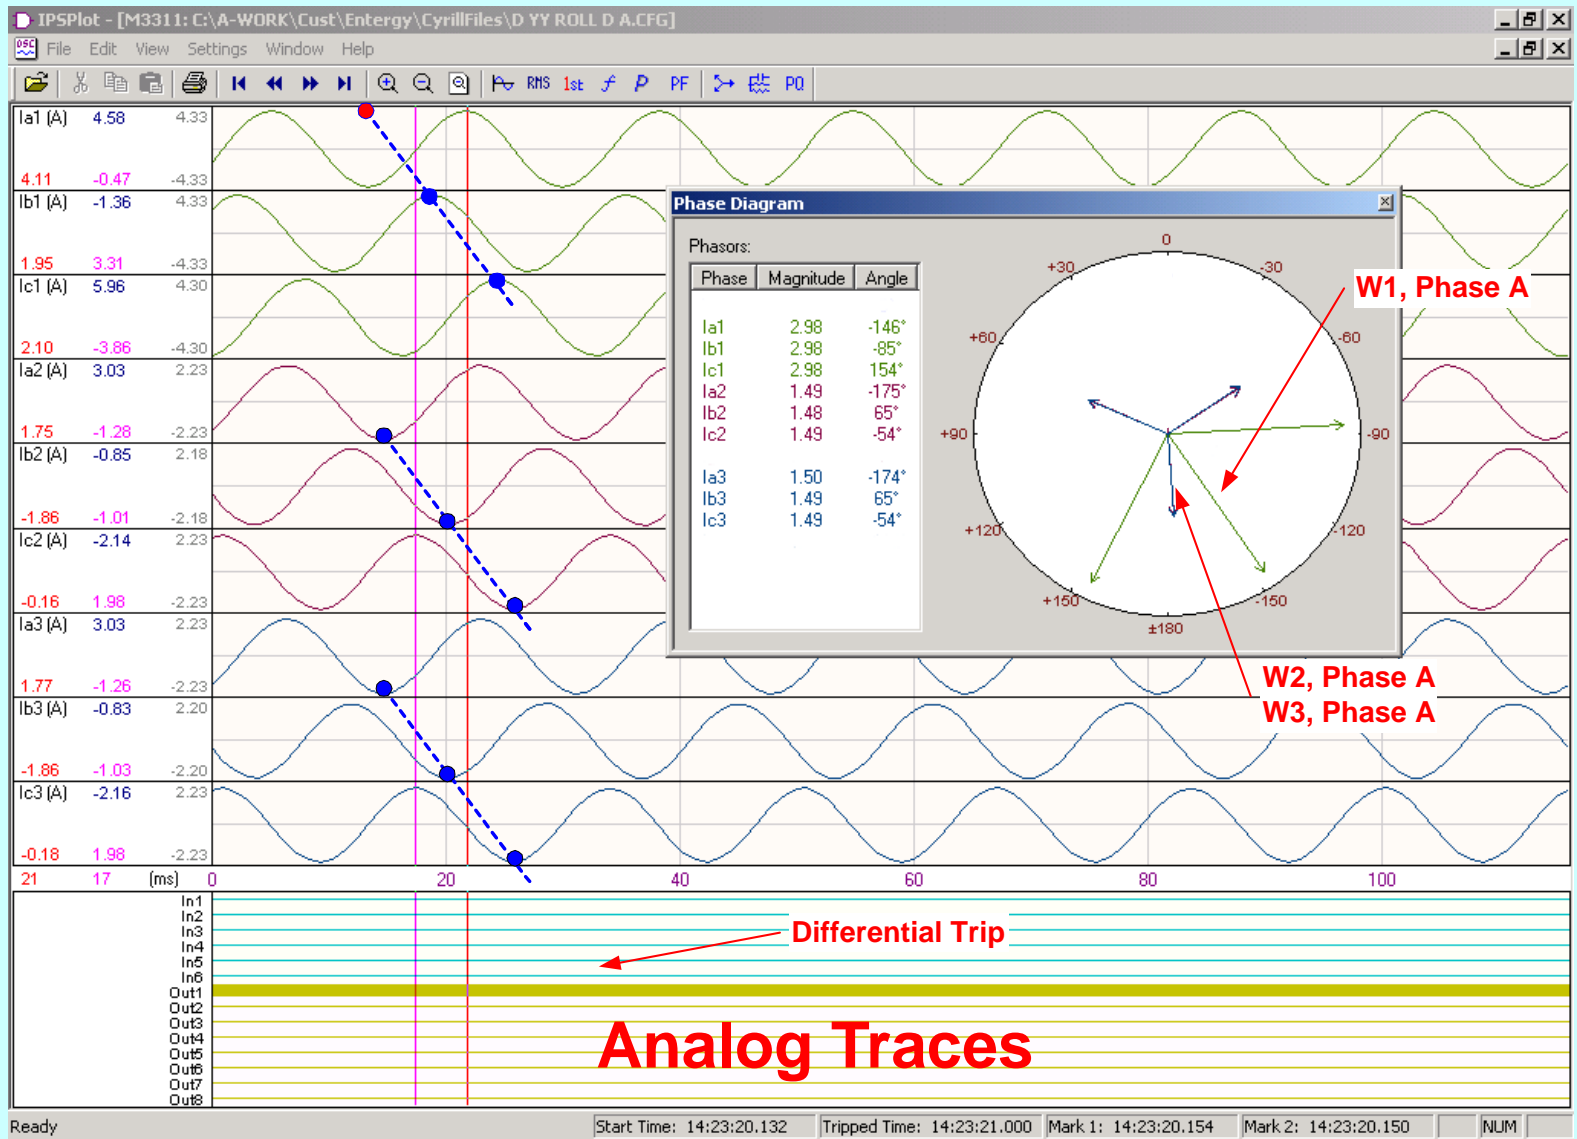

$\Delta:Y:Y$, yyy , 1:1 Ratio,
1:1 CTs, W1, Roll $\emptyset C$

Three Line: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll \emptyset C

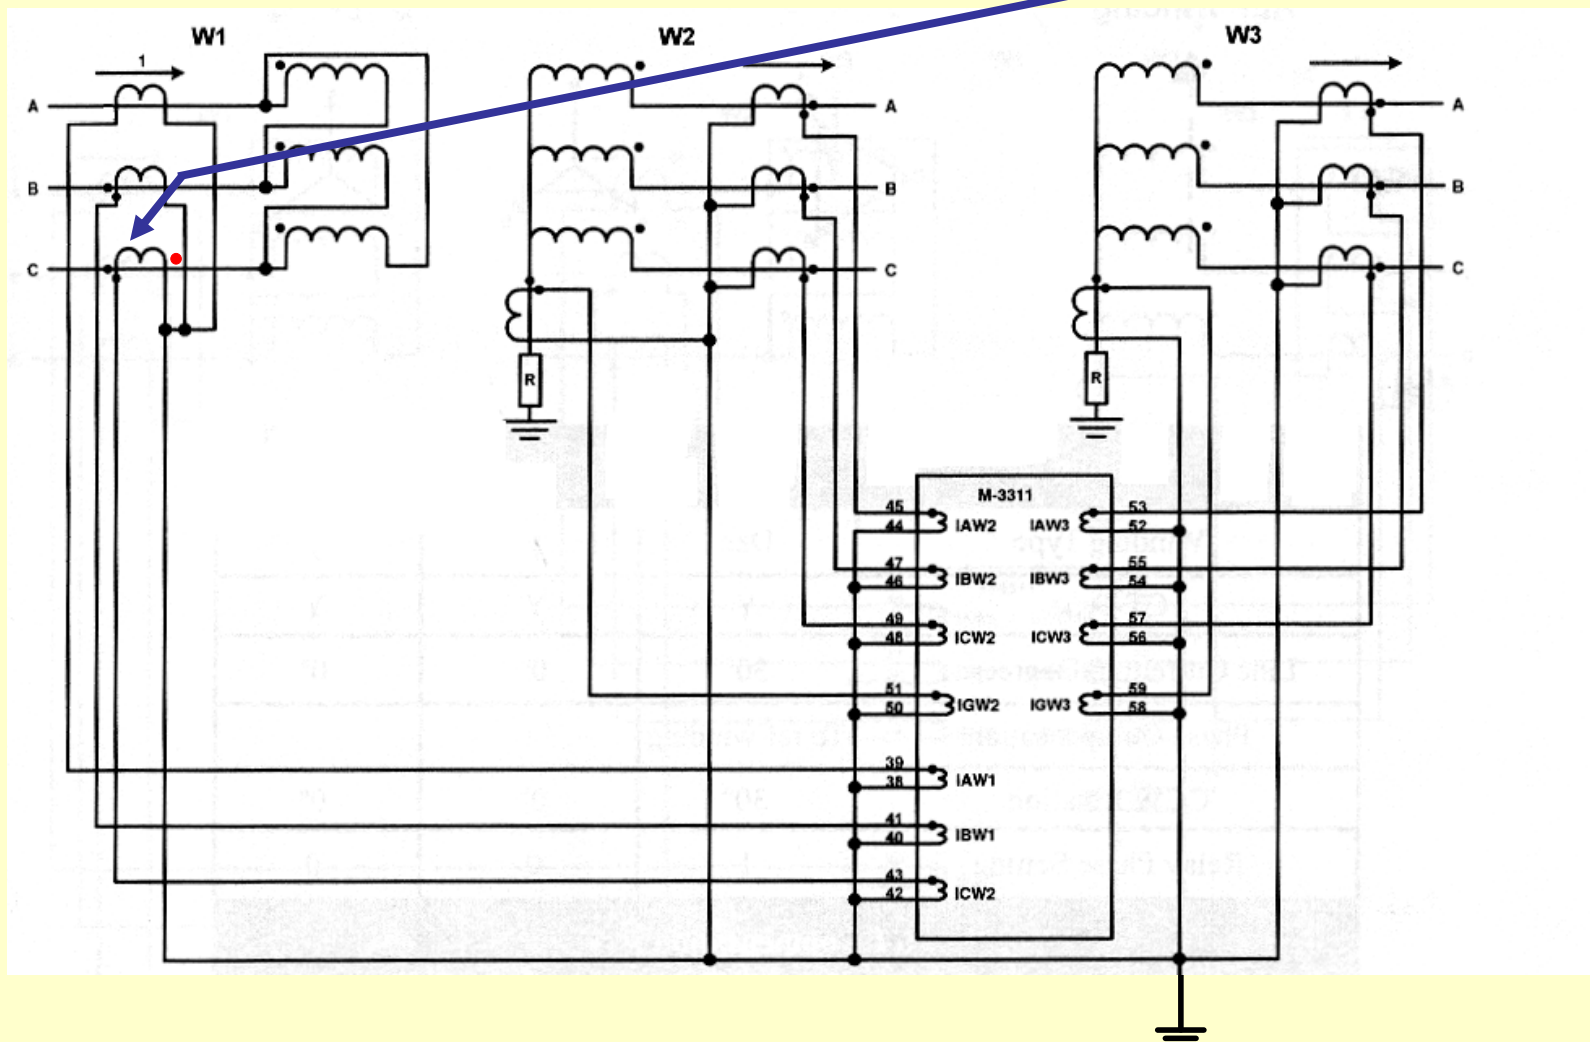

Advanced Metering: Δ:Y:Y, 1:1 Ratio, 1:1 CTs, W1, Roll ØC

IPScom M-3300 Series (S-3300) (SERIAL) - [Secondary Metering & Status]

File Communication Monitor Relay Tools Windows Help

Secondary Metering Phasor Diagram Setpoints

W1 Currents (A)		W2 Currents (A)		W3 Currents (A)		W4 Currents (A)	
Phase A	2.988	Phase A	1.495	Phase A	1.494	Phase A	0.002
Phase B	2.981	Phase B	1.494	Phase B	1.495	Phase B	0.000
Phase C	2.997	Phase C	1.495	Phase C	1.493	Phase C	0.000
Ground		Ground	0.000	Ground	0.000	Ground	0.000
Pos. Seq.	0.993	Pos. Seq.	1.493	Pos. Seq.	1.493	Pos. Seq.	0.000
Neg. Seq.	1.996	Neg. Seq.	0.004	Neg. Seq.	0.002	Neg. Seq.	0.000
Zero Seq.	1.993	Zero Seq.	0.004	Zero Seq.	0.005	Zero Seq.	0.000

Phase Differential (pu)		Restr. Currents (pu)		Ground Differential (A)		Misc	
Phase A	0.01	Phase A	2.98	W2	0.00	VAB (V)	114.9
Phase B	0.01	Phase B	2.98	W3	0.00	VG (V)	0.0
Phase C	5.98	Phase C	2.98	W4	0.00	Freq (Hz)	60.00
						V/Hz (%)	100.0


Inputs											
1	2	3	4	5	6	7	8	9	10	11	
12	13	14	15	16	17	18	TC 1	TC 2	CC 1	CC 2	

Outputs							
1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16


Status
Breaker Closed
Aux Voltage
Osc Triggered
Targets

BECKWITH ELECTRIC CO. M-3311A M-3311A: 60Hz, 5A CT Firmware Version: D-0179V00.01.05 Connected

Vector Metering: $\Delta:Y:Y$, 1:1 Ratio, 1:1 CTs, W1, Roll $\emptyset C$

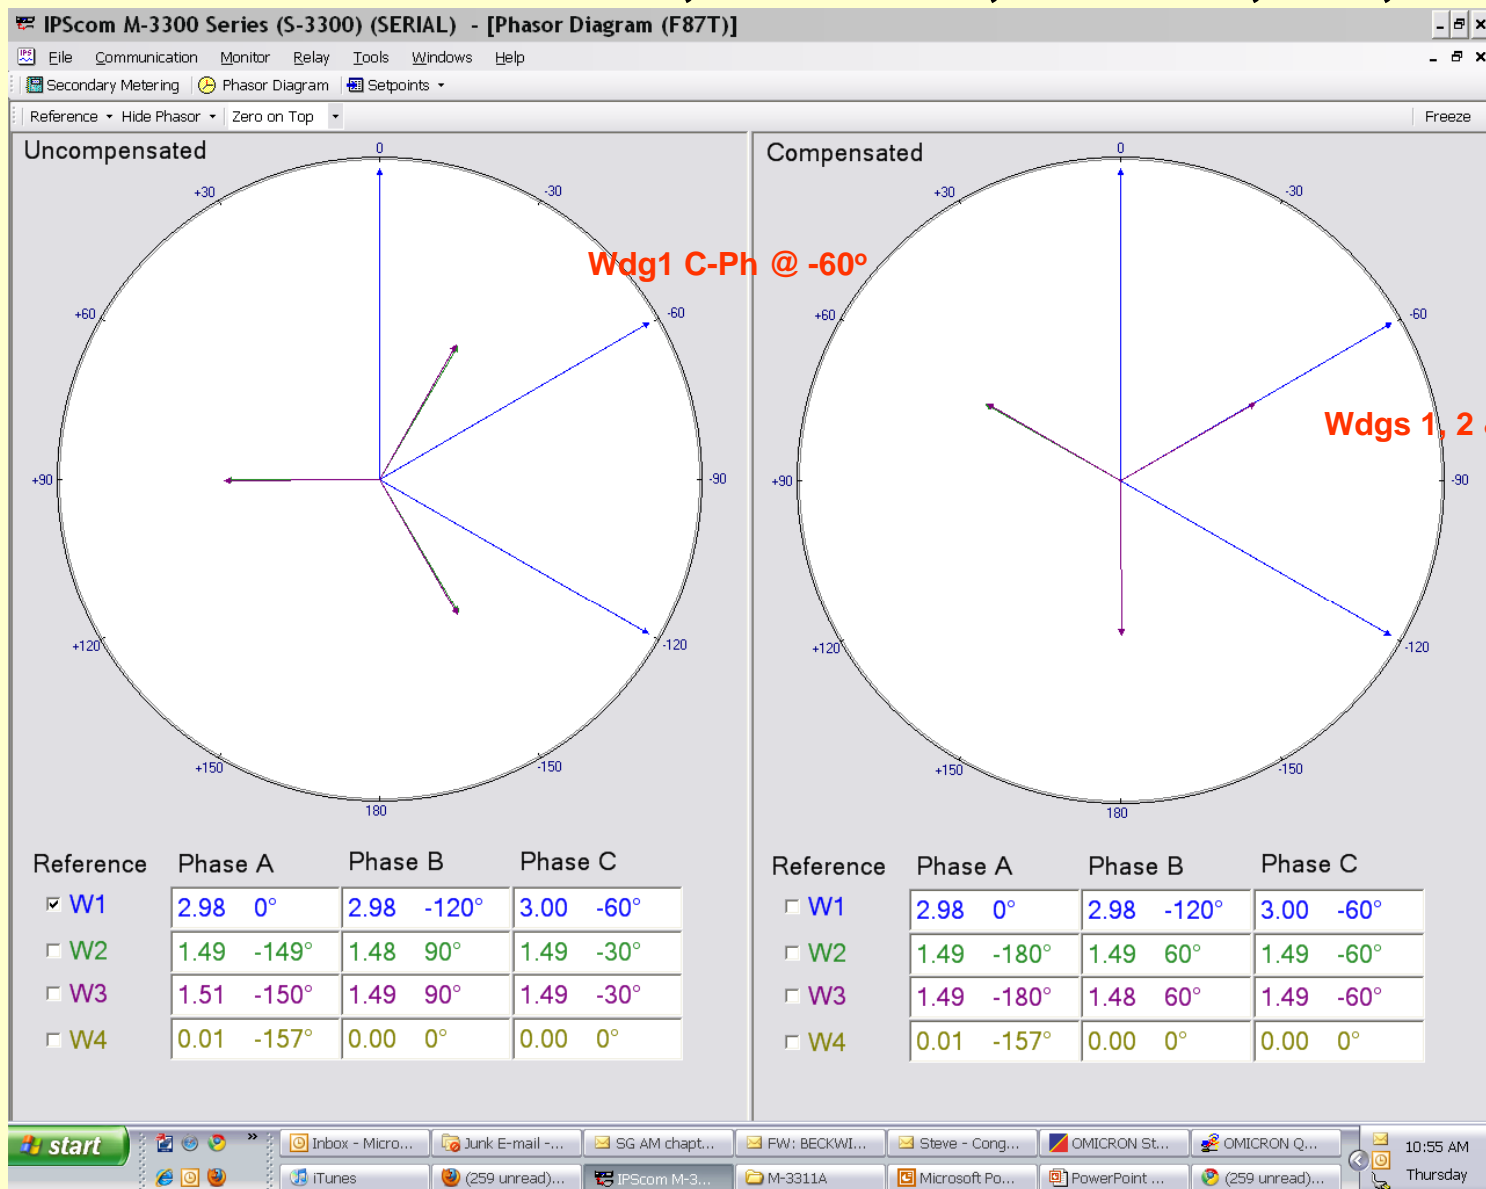

Digital Oscillography: Δ :Y:Y, 1:1 Ratio, 1:1 CTs, W1, Roll \emptyset C

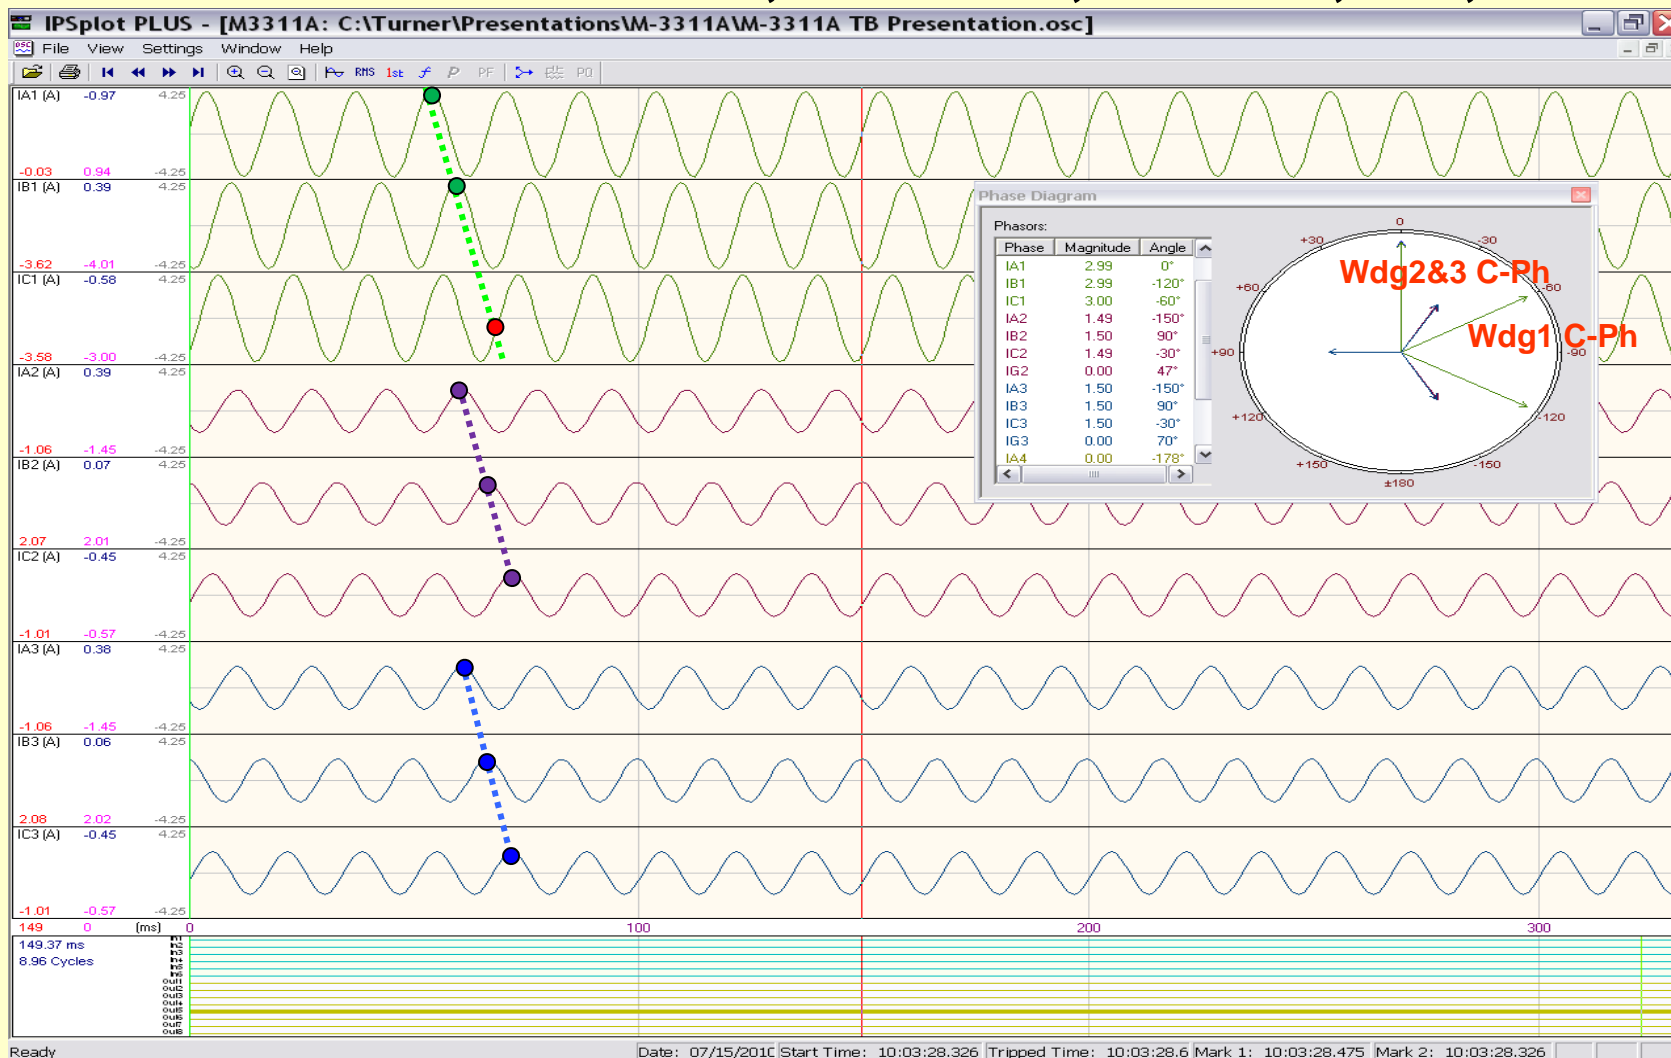

Analog Traces


Commissioning Tools Make Your Life Easier!

- Advanced Metering
 - Sequence components for all windings
 - Positive, negative and zero
- Restraint and differential currents
- Vector Metering
 - Uncompensated
 - Raw signal
 - Compensated
 - Post vector and ratio corrections
- Digital Oscillography
 - All winding currents

2 Winding

M-3311A Typical Connection Diagram
Two Winding Model


- This function is available as a standard protective function.
- This function is available in the Optional Voltage Protection Package

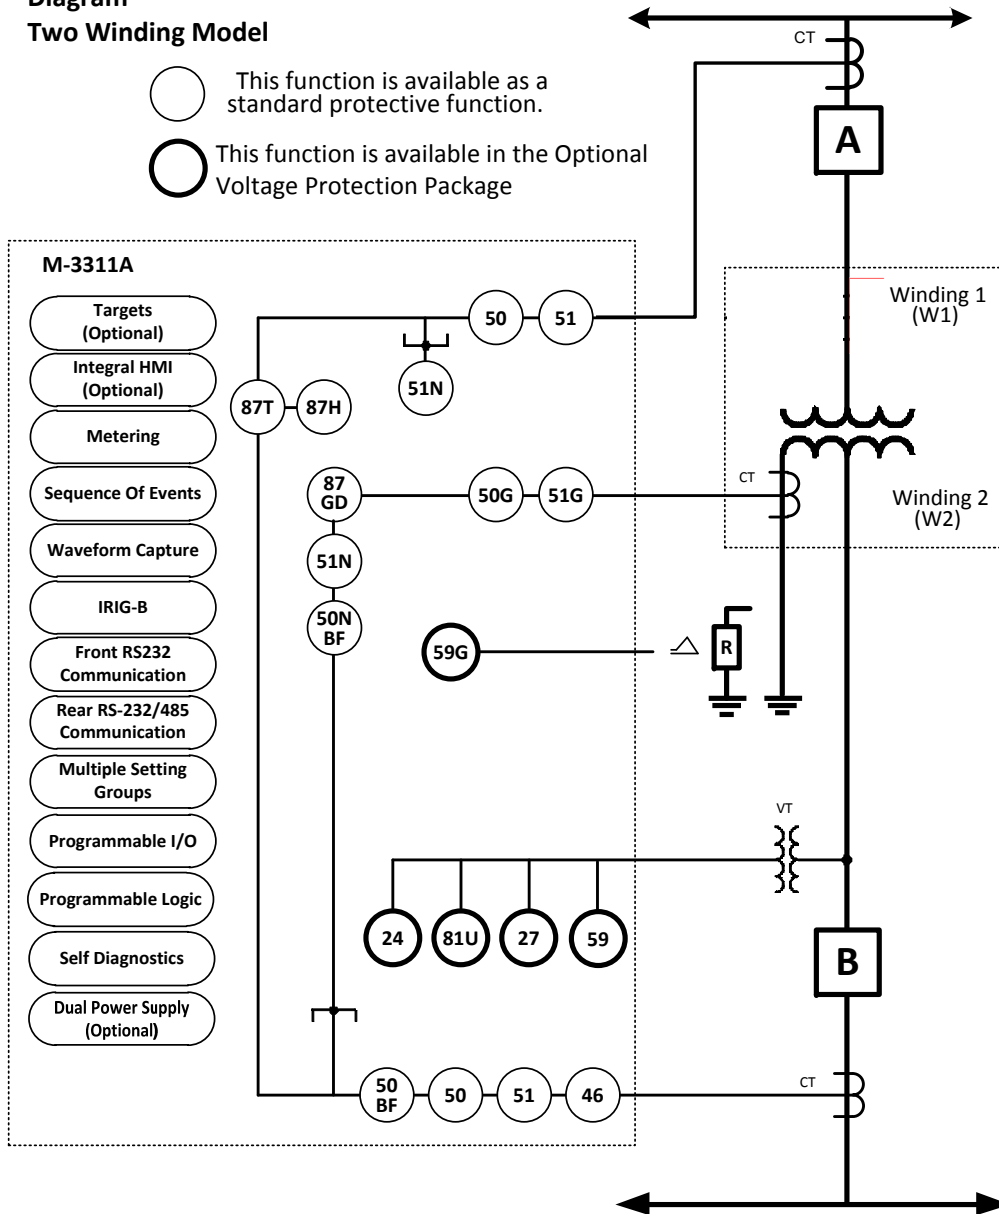

3 Winding



M-3311A Typical Connection Diagram Three Winding Model

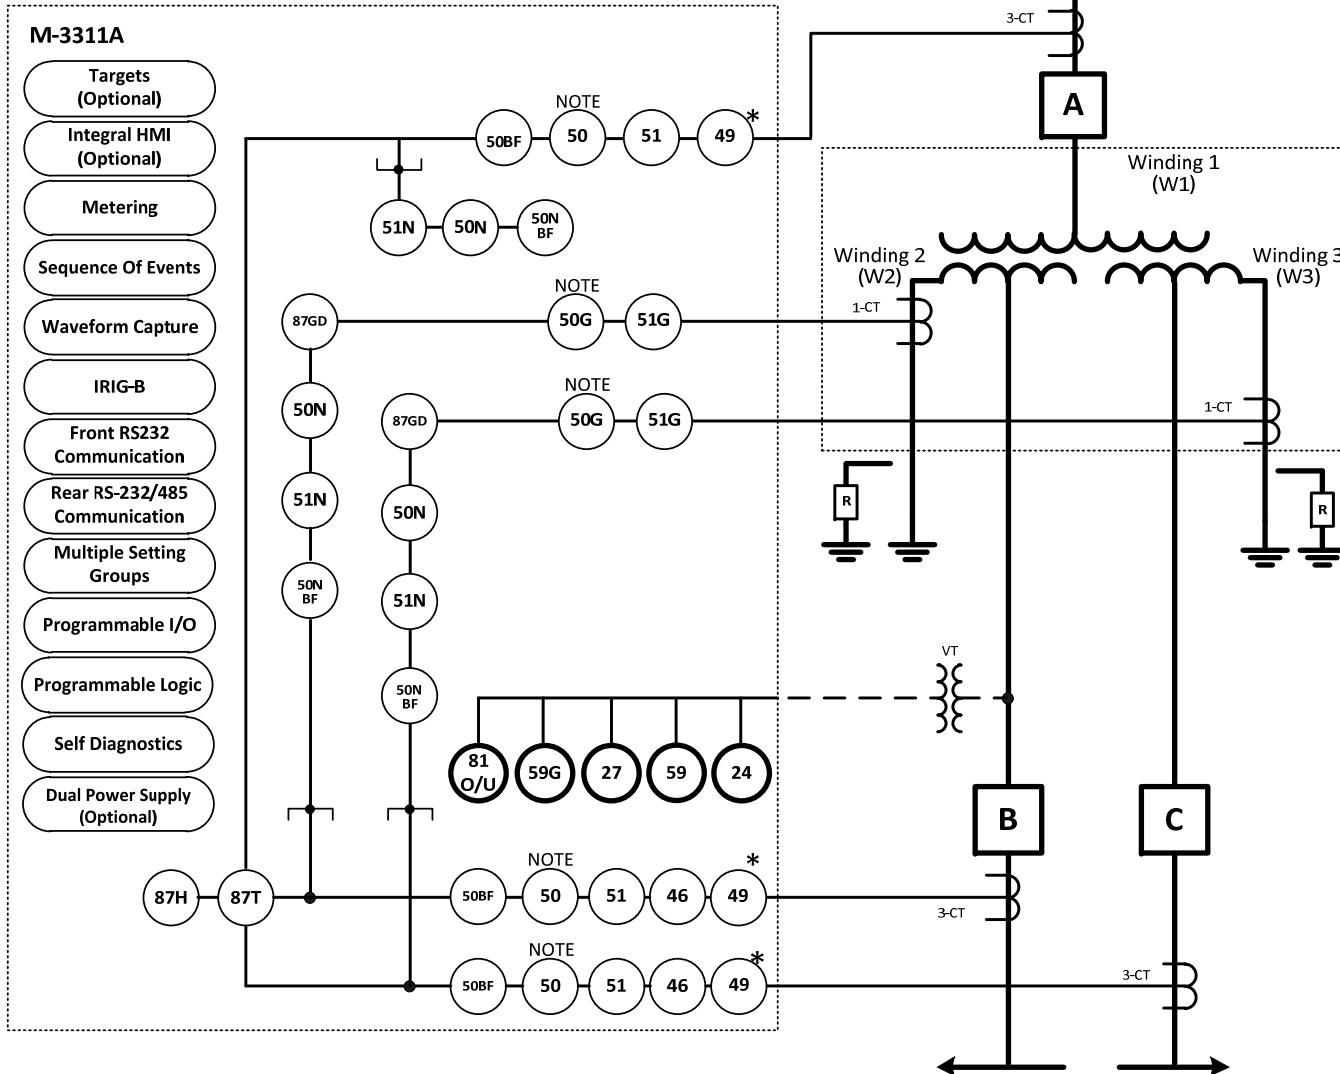
- This function is available as a standard protective function.
- This function is available in the Optional Voltage Protection Packages.





4 Winding


M-3311A Typical Connection Diagram Four Winding Model

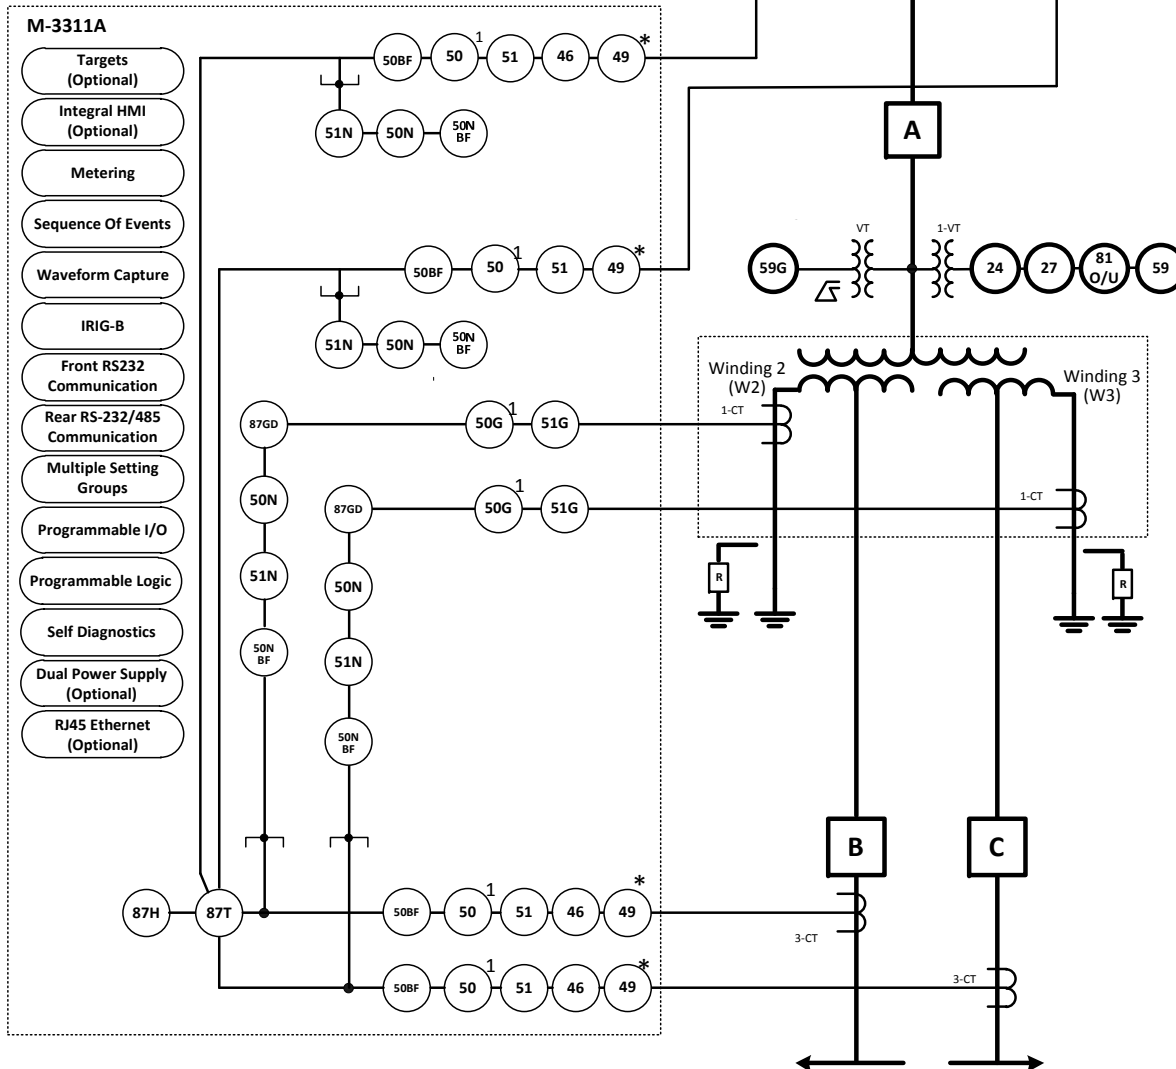-  This function is available as a standard protective function.
-  This function is available in the Optional Voltage Protection Packages.



M-3311A Typical Connection Diagram Four Winding Model

-  This function is available as a standard protective function.
-  This function is available in the Optional Voltage Protection Package.

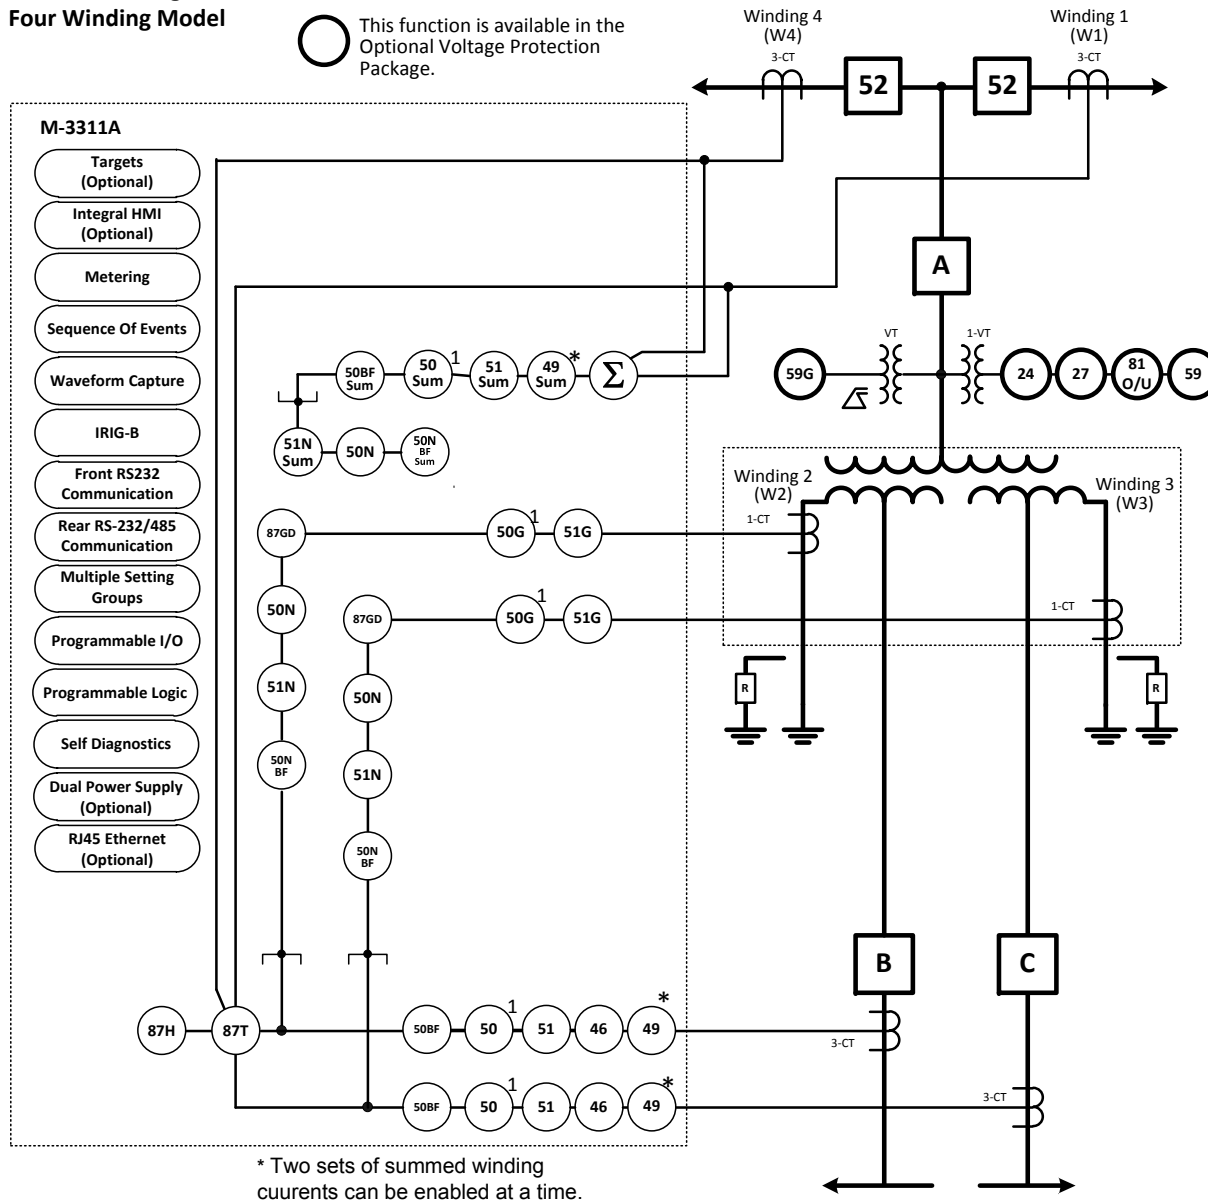

4 Winding
w/Current
Summing

Unique Features of Beckwith Transformer Protection Relays

- Voltage inputs with overexcitation protection
- Adaptive overexcitation restraint based on 5th harmonic
- Use of 2nd and 4th harmonic for inrush restraint
- Up to three ground directional differential elements
- Current summing for 51 and 87GD functions to be used with breaker and a half configuration
- Through fault monitoring to schedule early maintenance and prevent transformer failures
- Graphical display of uncompensated and compensated phasors for each winding to help with test and commissioning
- Easy to access metering screens for test and commissioning
- User friendly setting of transformer/CT connection configurations

References

1. *IEEE Guide for Transformer Protection*, ANSI/IEEE C37.91-2008.
2. *IEEE Recommended Practice for Grounding of Industrial and Commercial Power Systems*, IEEE Std. 142-1991.
3. *Protective Relaying: Principles and Applications*, 3rd Ed.; Lew Blackburn and Thomas Domin, CRC Press 2007; ISBN# 978-1-57444-716-3
4. *Protective Relaying for Power Generation Systems*; Donald Reimert, CRC Press 2006; ISBN#0-8247-0700-1.
5. *Industrial Power Distribution*; Dr. Ralph E. Fehr III, Wiley – IEEE Press 2016; ISBN# 978-1-119-06334-6
5. *Optimizing Transformer Protection*, Wayne Hartmann, presented at the Doble Conference 2016

Beckwith Electric
Protection Seminar




Thank You

Questions?

Interface and Analysis Software: Desirable Attributes

- NERC “State of Reliability 2013”
- 30% of Relay Misoperations are due to human interface error
 - Programming too complex
 - Commissioning difficult
 - Period Testing difficult

Figure 4.8: NERC Misoperations by Cause Code from 2011Q2 to 2012Q3

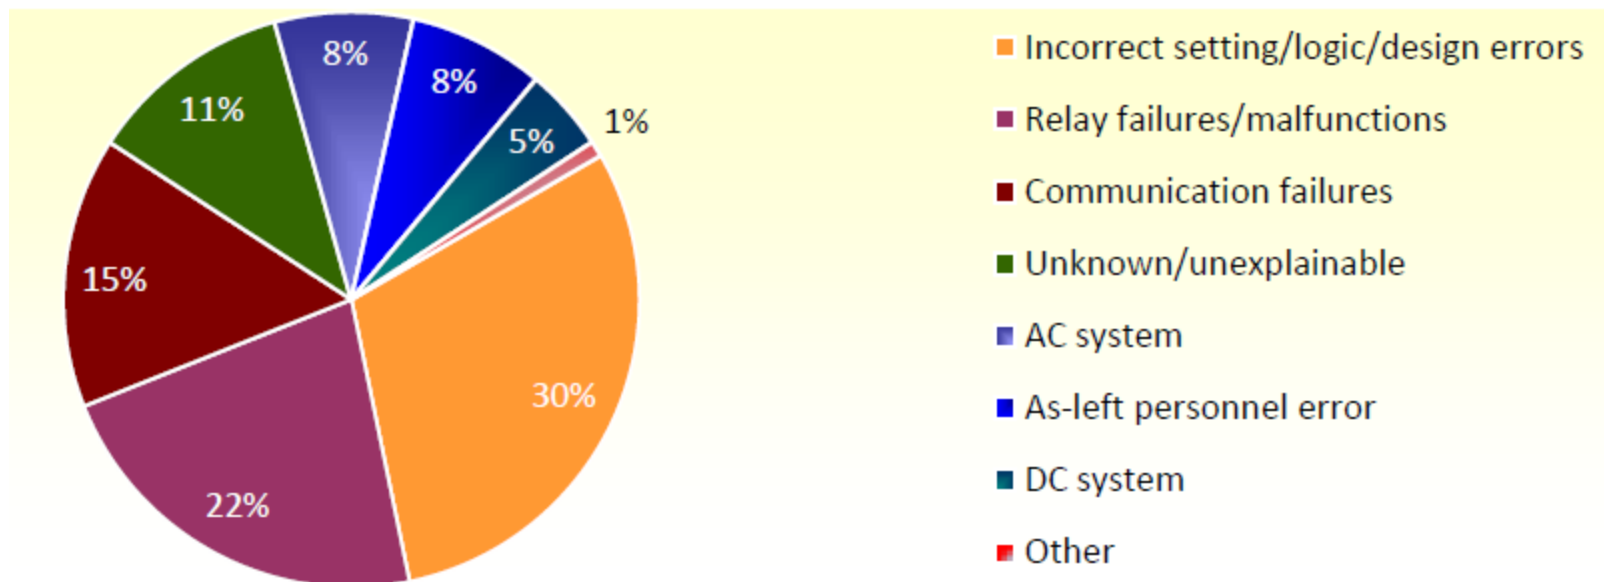

Interface and Analysis Software: Desirable Attributes


- PC Software package for setpoint interrogation and modification, metering, monitoring, and downloading oscillography records
- Oscillography Analysis Software package graphically displays to facilitate analysis, and print captured waveforms

Be menu-driven, graphical, simple to use



- Autodocumentation to eliminates transcription errors

How do you set a relay?



- Set the configuration (relay environment)
- Set elements
- Define tripping and blocking assignments
- Review/print summary

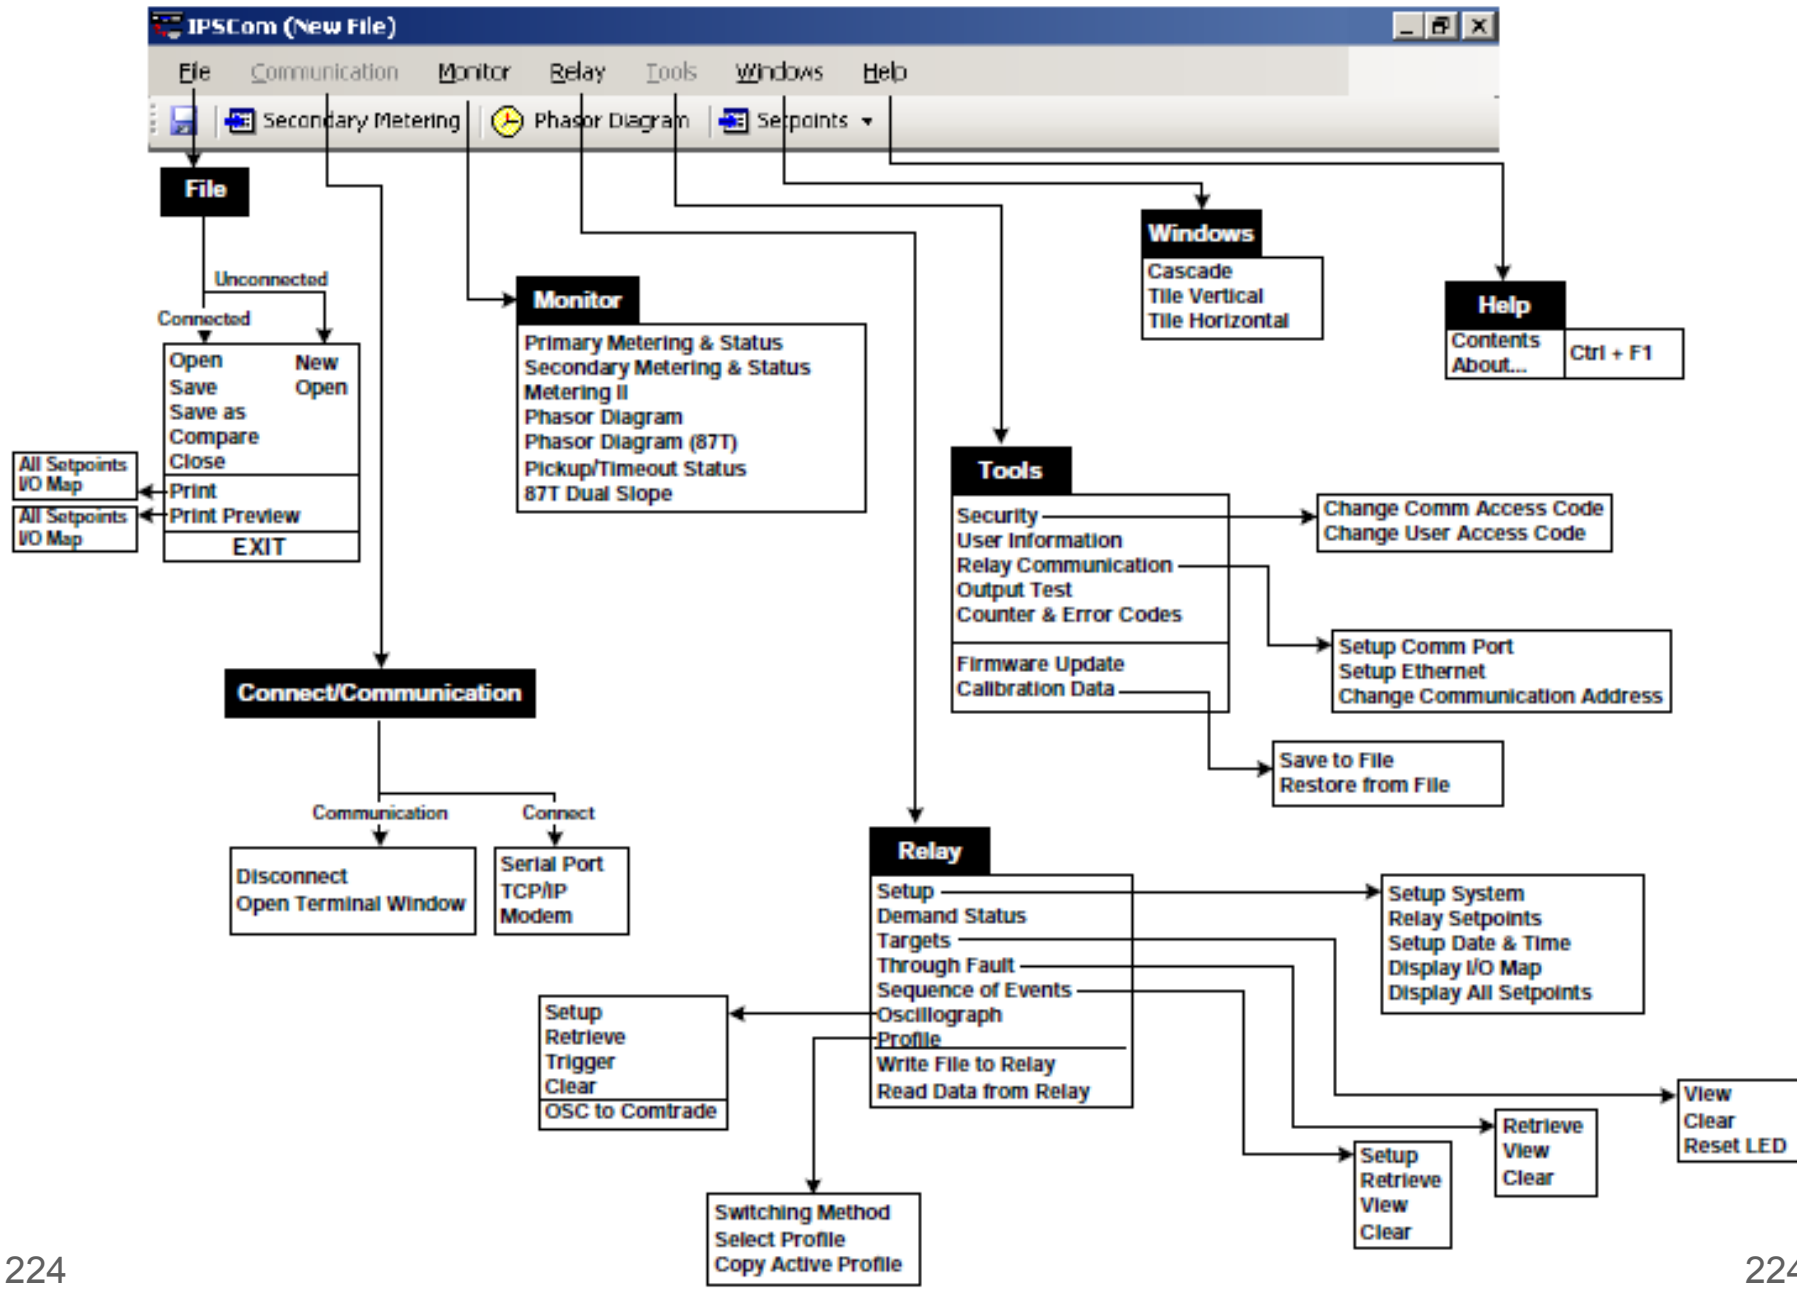



Creating NEW File

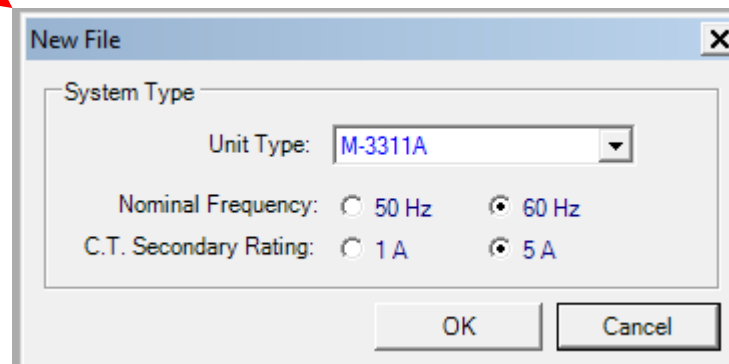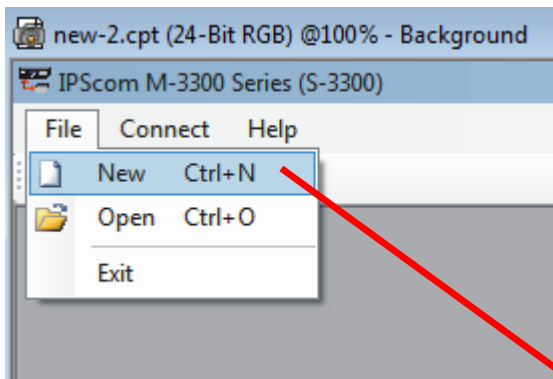


Opening EXISTING File

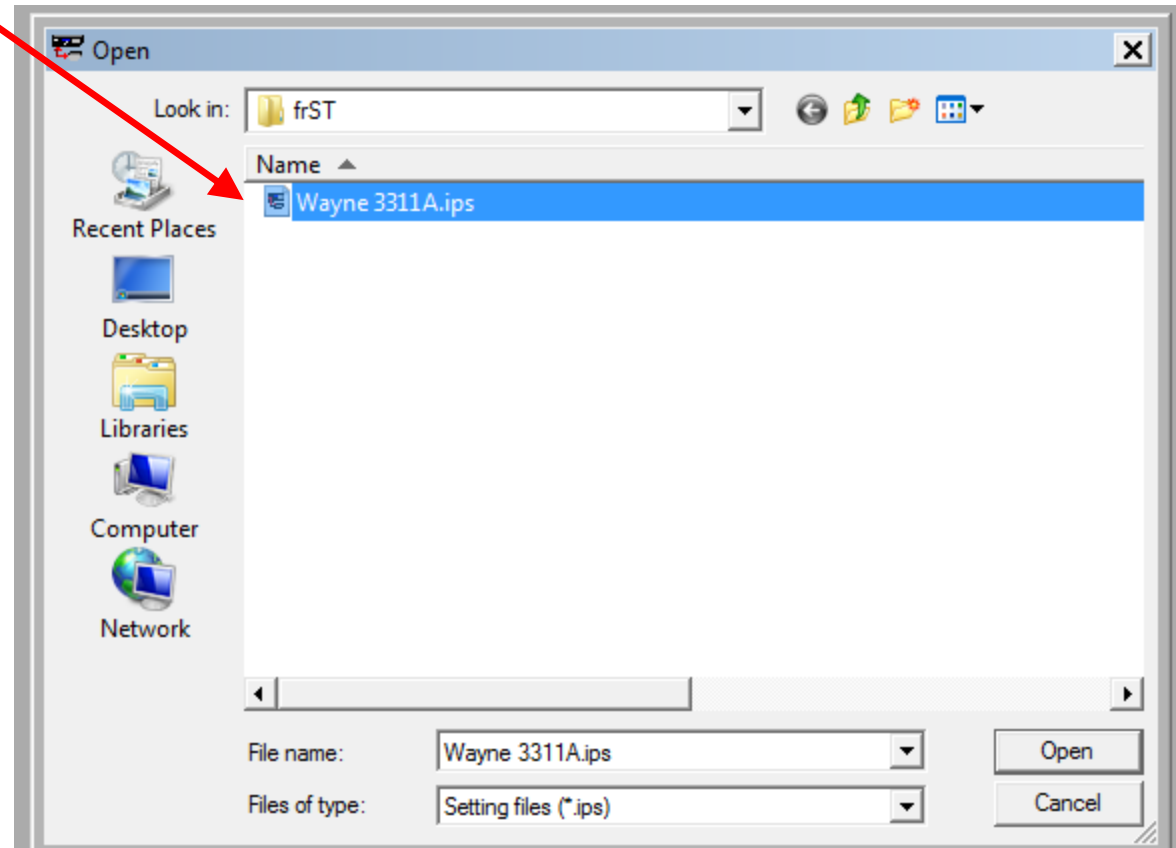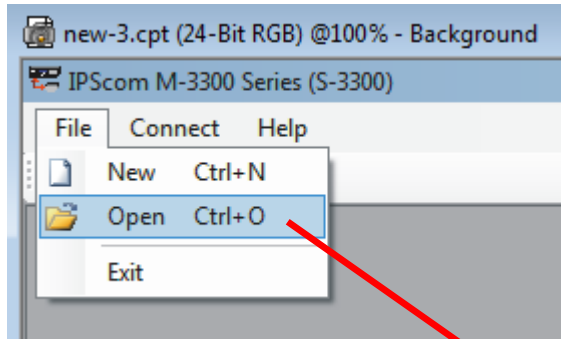

Connect to the Relay

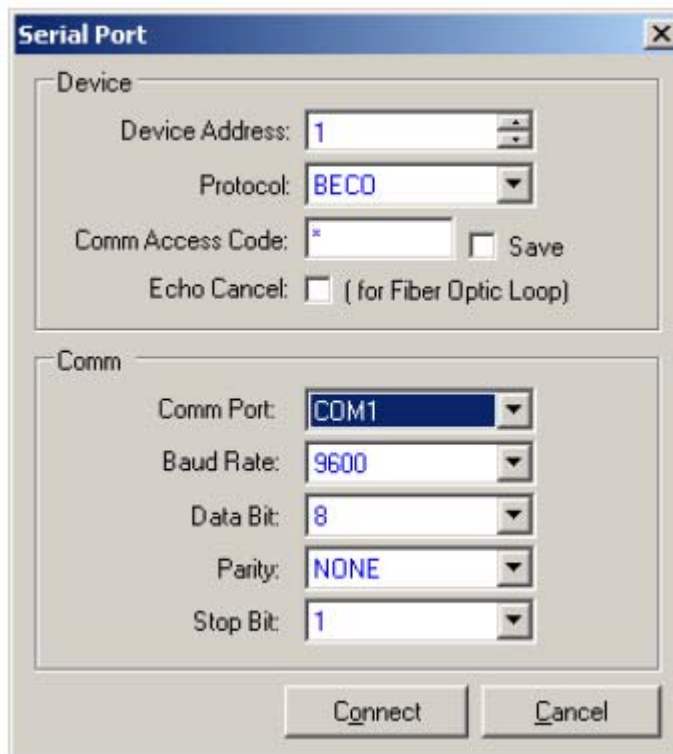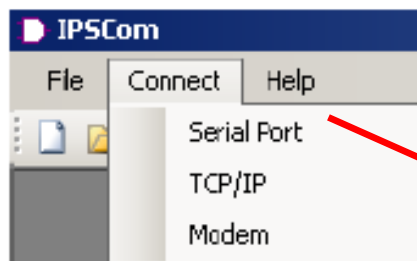

Set Up System

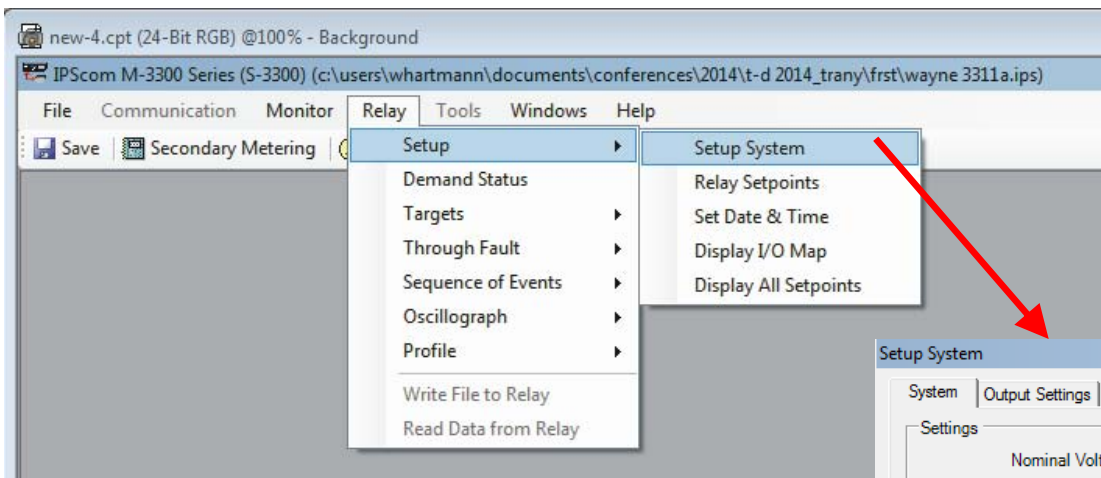

Setup System

System | Output Settings | Input Settings

Settings

Nominal Voltage: 120 60 140 (V)

Phase Rotation: ACB ABC

Demand Timing Method: 15 Minutes 30 Minutes 60 Minutes

V.T. Config: VAB VBC VCA VA VB VC

Current Summing 1: W1 W2 W3 W4

Current Summing 2: W1 W2 W3 W4

Enable/Disable Windings for 87 Function

More Than 2 Windings Winding 1 and Winding 2 Only

Transformer/CT Phase Compensation Standard Custom

Transformer W1	Transformer W2	Transformer W3	Transformer W4
1 (Dac)	0 (Y)	0 (Y)	0 (Y)
C.T. W1	C.T. W2	C.T. W3	C.T. W4
0 (Y)	13 (Dac)	0 (Y)	0 (Y)

W1 Zero Sequence Filter: Disable Enable

W2 Zero Sequence Filter: Disable Enable

W3 Zero Sequence Filter: Disable Enable




W4 Zero Sequence Filter: Disable Enable

V.T. and C.T. Ratio


V.T. Ratio	V.T. Ground Ratio	C.T. W1 Phase Ratio	C.T. W2 Phase Ratio	C.T. W3 Phase Ratio	C.T. W4 Phase Ratio	C.T. W2 Ground Ratio	C.T. W3 Ground Ratio	C.T. W4 Ground Ratio
115.0	1.0	40	40	160	160	50	100	100
6550.0 (:1)	6550.0 (:1)	65500 (:1)	65500 (:1)	65500 (:1)	65500 (:1)	65500 (:1)	65500 (:1)	65500 (:1)

Save Cancel

Relay Setpoints

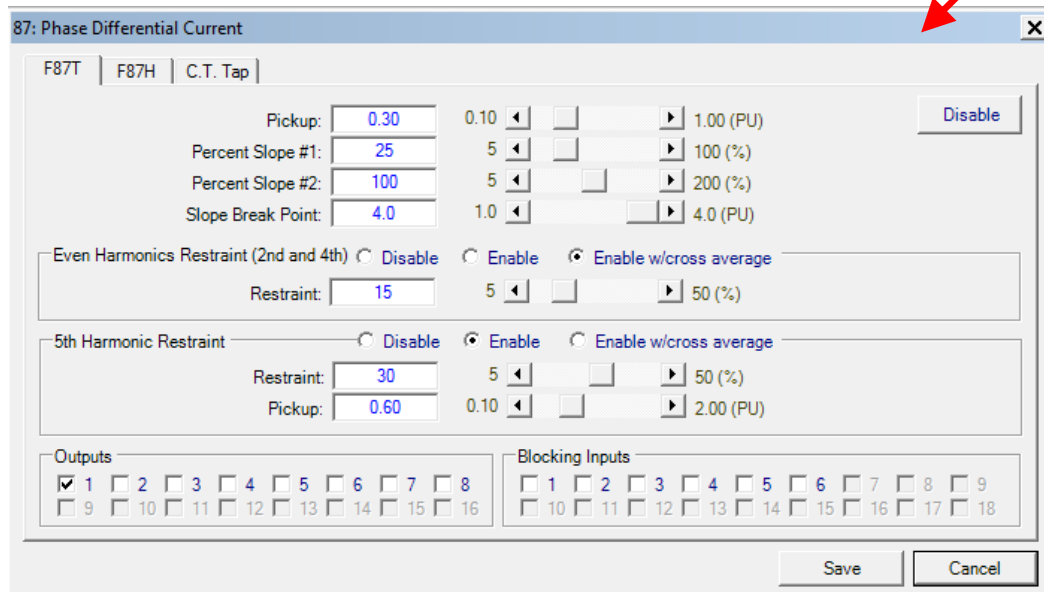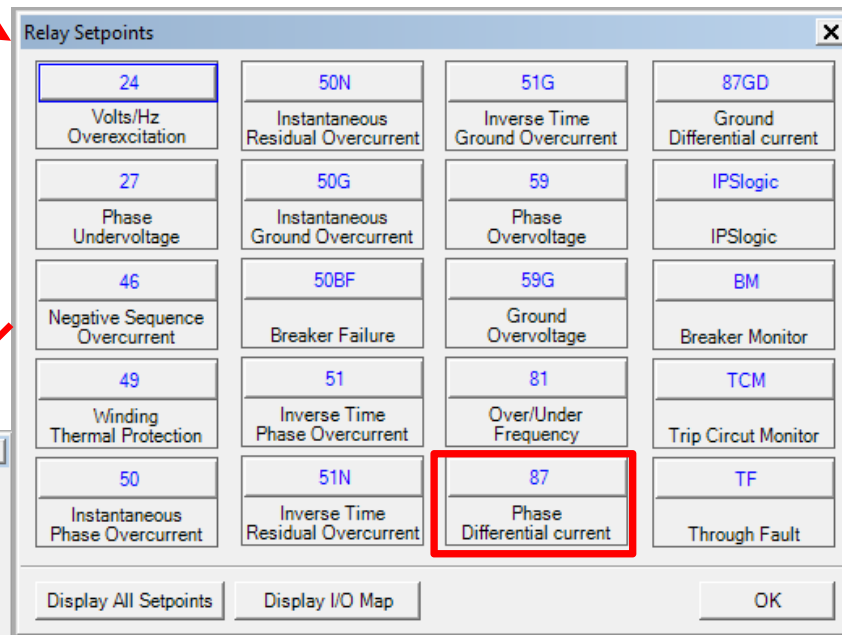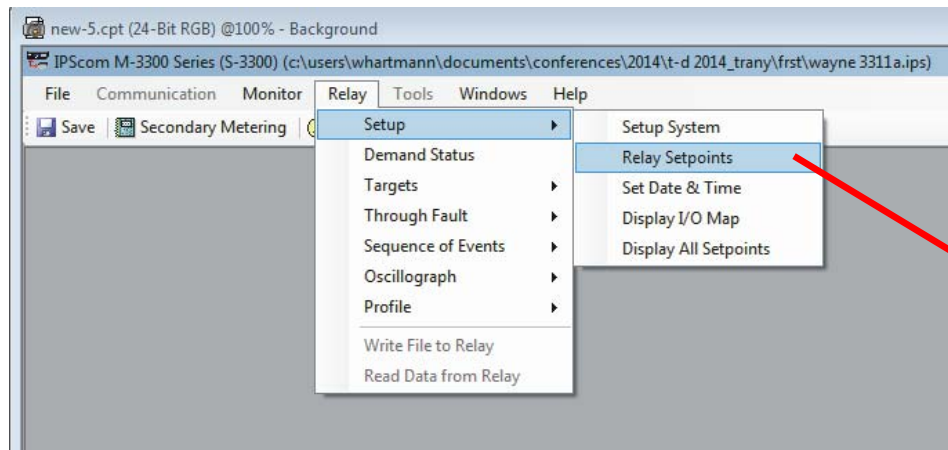


Display I/O Map

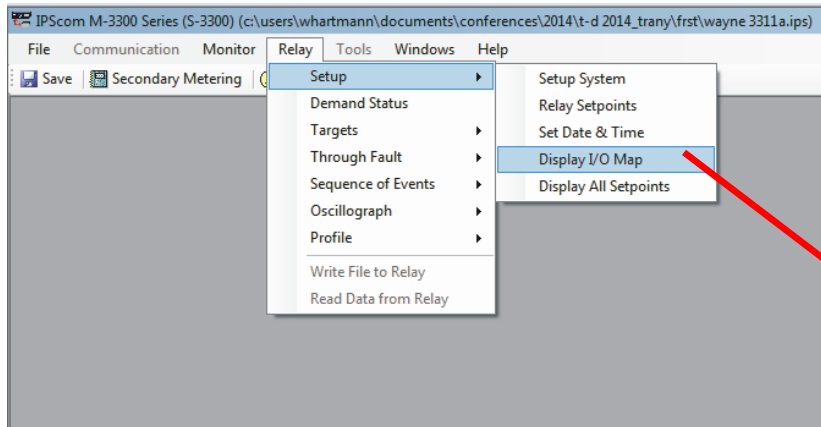




I/O Map

Save Print Print Preview

		Outputs										Blocking Inputs																	
		1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	1	2	3	4	5	6	7	8	9	10	11	12
#3	W2			3																									
51G	W3																												
51N	#1																												
	#2																												
59	#3																												
	#1																												
	#2																												
59G	#3																												
	#1																												
	#2																												
	#3																												
81	#1																												
	#2																												
	#3																												
	#4																												
87	87H																												
	87T																												
	W2 #1																												
87GD	W2 #2																												
	W3 #1																												
	W3 #2																												
TE	TF																												
TCM	TCM #1																												
	TCM #2																												
	CCM #1																												
	CCM #2																												

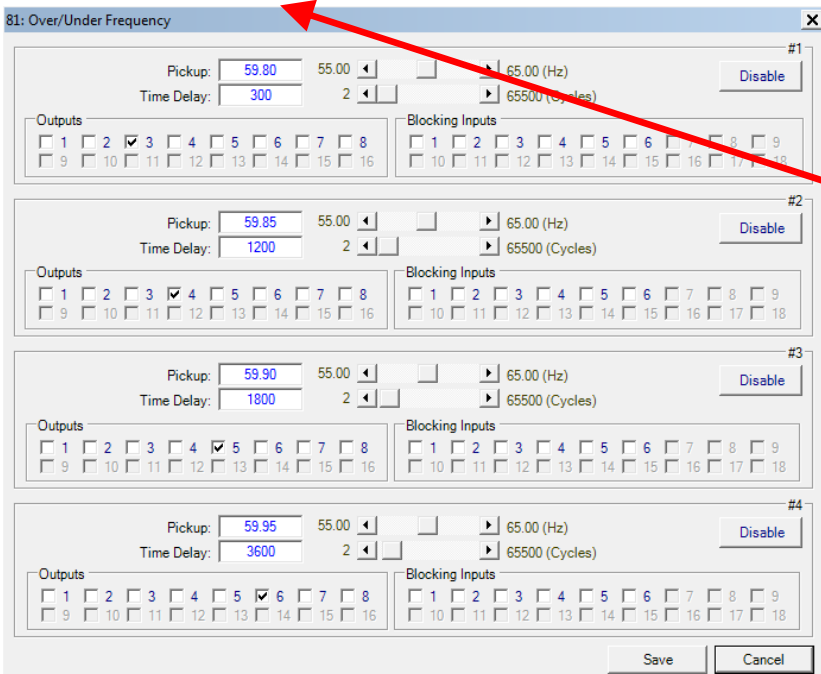

Display I/O Map
Element Disabled

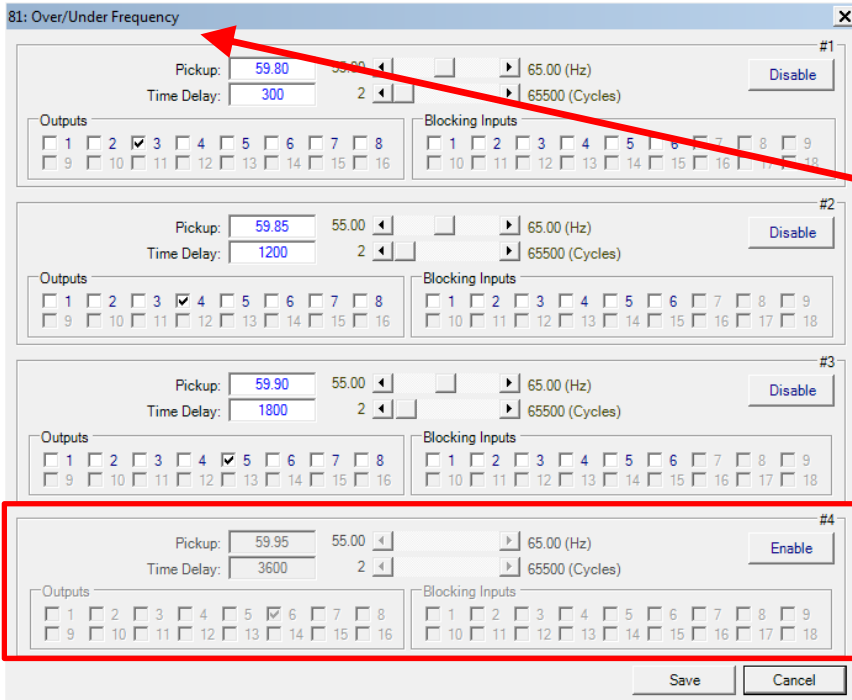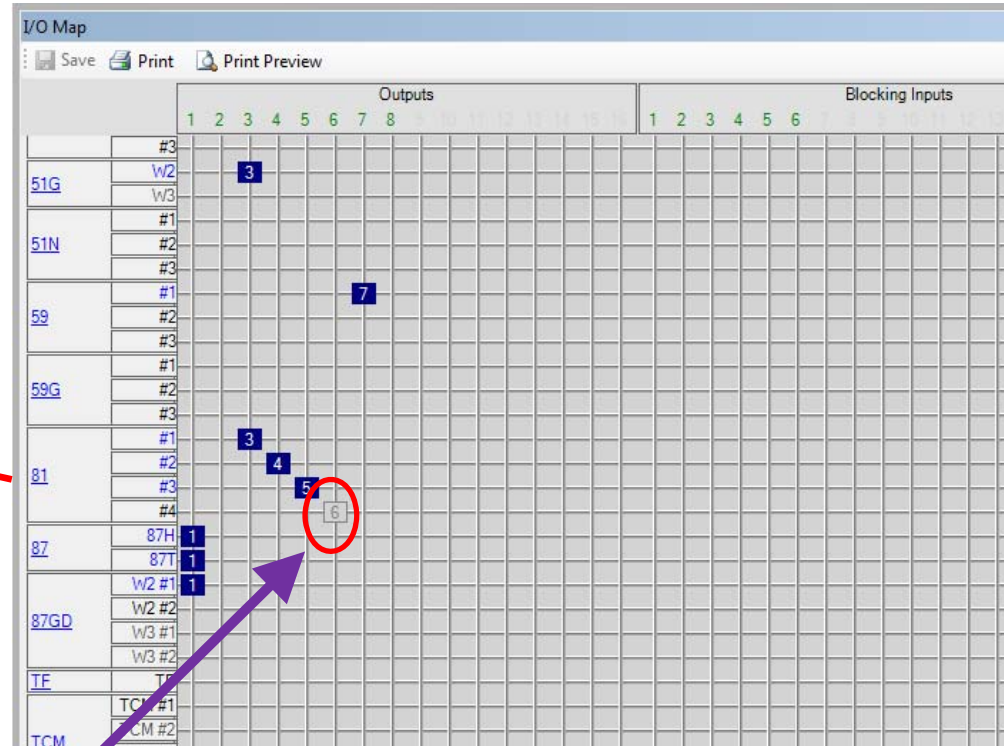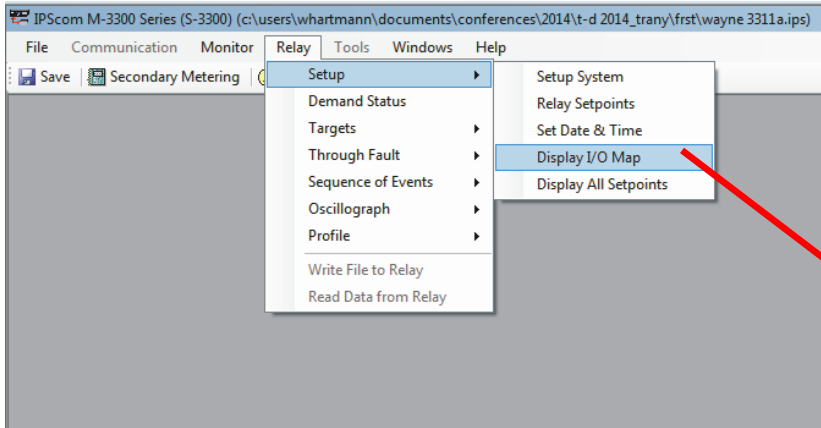

Through Fault Recorder

TF: Through Fault
✕

Through Fault Current Threshold:	5.0	1.0	◀	▶	100.0 (A)	<input type="button" value="Disable"/>
Through Fault Current Time Delay:	10	1	◀	▶	8160 (Cycles)	
Pickup Operation Limit:	10	1	◀	▶	65535	
Cumulative I ² T Limit:	1000	1	◀	▶	1000000 (kA ² Cycles)	
Current Selection:	Summing 1 ▼					
Inrush Block by Even Harmonics:	<input type="radio"/> Disable		<input checked="" type="radio"/> Enable			
Preset Cumulative I ² T:	0	0	◀	▶	1000000 (kA ² Cycles)	

Outputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input checked="" type="checkbox"/> 8
<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16

Blocking Inputs

<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 9
<input type="checkbox"/> 10	<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 17	<input type="checkbox"/> 18

Breaker Monitor


BM: Breaker Monitor ✕

Winding 1 | Winding 2 | Winding 3 | Winding 4

Pickup:	<input type="text" value="1000"/>	1	<input type="text" value="50000 (kA Cycles)"/>	<input type="button" value="Disable"/>
Time Delay:	<input type="text" value="10.0"/>	0.1	<input type="text" value="4095.9 (Cycles)"/>	
Timing Method Selection:	<input checked="" type="radio"/> IT <input type="radio"/> I ² T			
Preset Accumulator Phase A:	<input type="text" value="1000"/>	0	<input type="text" value="50000 (kA Cycles)"/>	
Preset Accumulator Phase B:	<input type="text" value="1000"/>	0	<input type="text" value="50000 (kA Cycles)"/>	
Preset Accumulator Phase C:	<input type="text" value="1000"/>	0	<input type="text" value="50000 (kA Cycles)"/>	

Output Initiate	Input Initiate
<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16 <input type="checkbox"/> 17 <input type="checkbox"/> 18
Outputs	Blocking Inputs
<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input checked="" type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16	<input type="checkbox"/> 1 <input type="checkbox"/> 2 <input type="checkbox"/> 3 <input type="checkbox"/> 4 <input type="checkbox"/> 5 <input type="checkbox"/> 6 <input type="checkbox"/> 7 <input type="checkbox"/> 8 <input type="checkbox"/> 9 <input type="checkbox"/> 10 <input type="checkbox"/> 11 <input type="checkbox"/> 12 <input type="checkbox"/> 13 <input type="checkbox"/> 14 <input type="checkbox"/> 15 <input type="checkbox"/> 16 <input type="checkbox"/> 17 <input type="checkbox"/> 18

Setpoint Summary

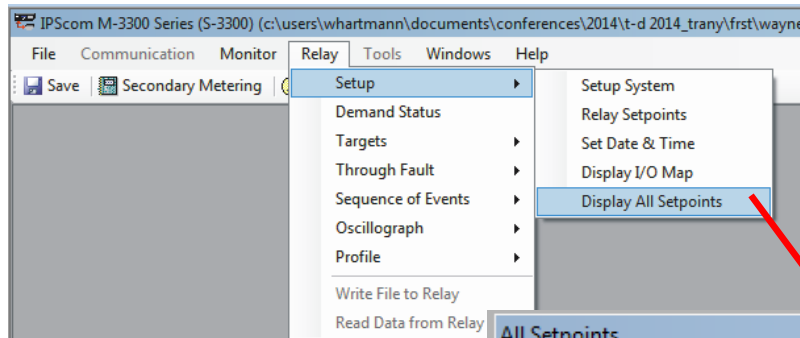

All Setpoints

Print Print Preview


M-3311A 2/3W All Setpoints

Software Version: D-0188V01.00.13
 Relay Firmware Version: D-0205V01.03.00
 Serial Number: 0
 BECKWITH ELECTRIC CO.

Setup System			
Setup			
CT Type:	5A	Frequency Type:	60Hz
Winding Selection:	Two Winding Only	Voltage Selection:	Four Voltages
VT Config:	Line to Ground	Voltage/Power Selection:	W2
Positive Power Flow:	OUT		
Phase Rotation:	ABC	Expanded I/O:	Disabled
Nominal Voltage:	69 (V)	Nominal Current:	1.67 (A)
V.T. Ratio:	115.5 (:1)	V.T. VG Ratio:	115.5 (:1)
C.T. W1 Phase Ratio:	120 (:1)	C.T. W2 Phase Ratio:	1000 (:1)
C.T. W2 Ground Ratio:	320 (:1)	Demand Timing Method:	15 (Minutes)
Current Summing 1:		Current Summing 2:	
Transformer/CT Connection (Standard)			
CT W1:	Y	CT W2:	Y
Transformer W1:	Dab	Transformer W2:	Y
Sealin Time			
Output 1:	30 (Cycles)	Output 2:	30 (Cycles)
Output 3:	30 (Cycles)	Output 4:	30 (Cycles)


Example:

Programmable Logic

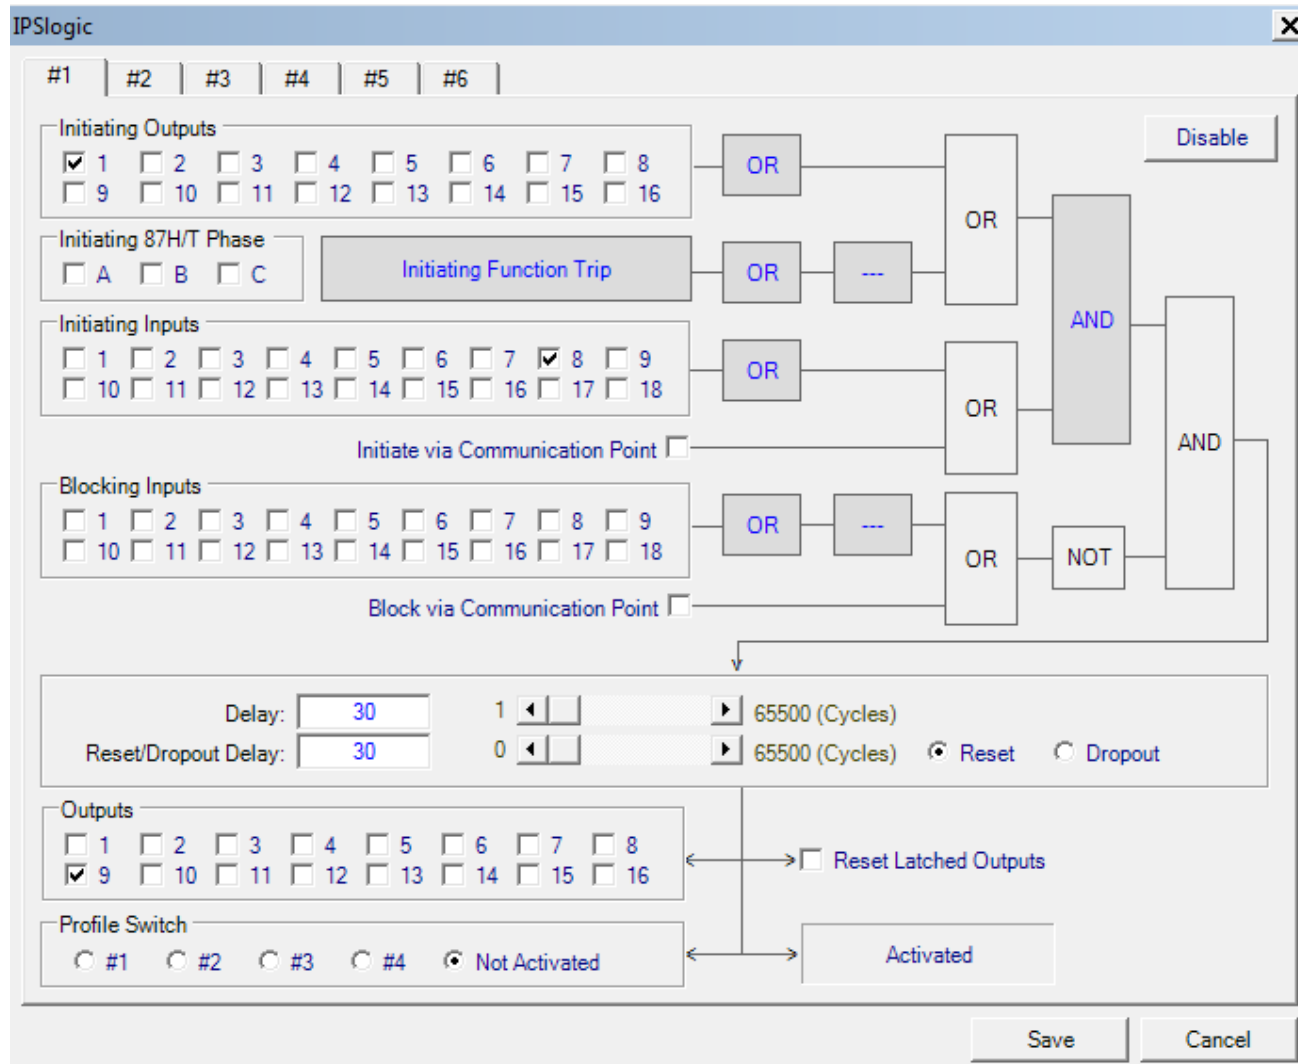

Example:

Programmable Logic

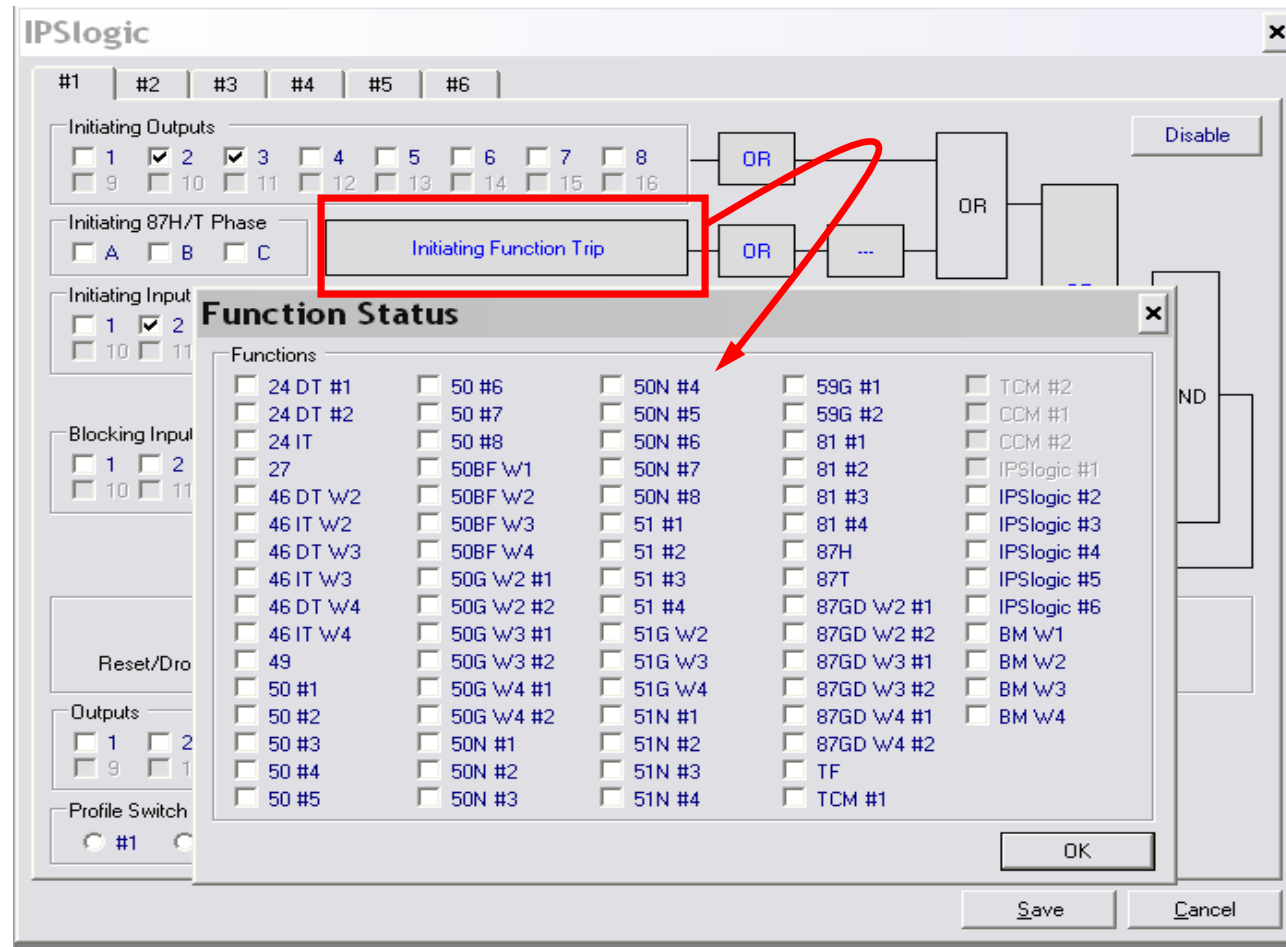


Graphic Metering and Monitoring

- Metering of all measured inputs
 - Measured and calculated quantities
 - Instrumentation grade

- Commissioning and Analysis Tools
 - Advanced metering
 - Event logs
 - Vector meters
 - R-X Graphics
 - Oscillograph recording

Primary Metering And Component Metering

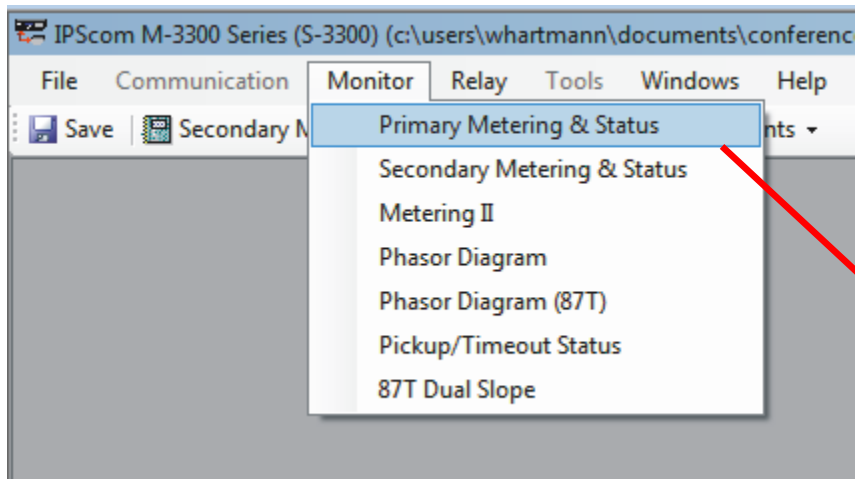

The 'Primary Metering & Status' window displays the following data:

W1 Currents (A)		W2 Currents (A)		W3 Currents (A)		Voltage (V)	
Phase A	0.000	Phase A	0.000	Phase A	0.000	Phase A	0.0
Phase B	0.000	Phase B	0.000	Phase B	0.000	Phase B	0.0
Phase C	0.000	Phase C	0.000	Phase C	0.000	Phase C	0.0
Pos. Seq.	0.000	Ground	0.000	Ground	0.000	VG	0.0
Neg. Seq.	0.000	Pos. Seq.	0.000	Pos. Seq.	0.000	Pos. Seq.	0.0
Zero Seq.	0.000	Neg. Seq.	0.000	Neg. Seq.	0.000	Neg. Seq.	0.0
		Zero Seq.	0.000	Zero Seq.	0.000	Zero Seq.	0.0

Restr. Currents (pu)			Phase Differential (pu)			Ground Differential (A)		Misc	
Phase A	0.00		Phase A	0.00		W2	0.00	Freq (Hz)	Disabled
Phase B	0.00		Phase B	0.00		W3	0.00	V/Hz (%)	0.0
Phase C	0.00		Phase C	0.00					


Power (pu)			
Real	0.0000	Reactive	0.0000
Apparent	0.0000	Factor	0.00

Inputs											Status	
1	2	3	4	5	6	7	8	9	10	11	Breaker 1 Closed	Breaker 2 Closed
12	13	14	15	16	17	18	TC 1	TC 2	CC 1	CC 2		

Outputs							
1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

Targets


Secondary Metering, Components Metering, and Status

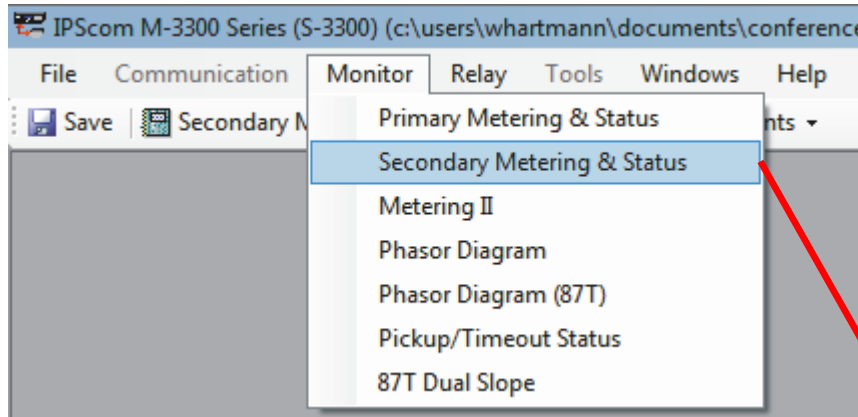

Secondary Metering & Status

W1 Currents (A)		W2 Currents (A)		W3 Currents (A)		Voltage (V)				
Phase A	0.000	Phase A	0.000	Phase A	0.000	Phase A	0.0			
Phase B	0.000	Phase B	0.000	Phase B	0.000	Phase B	0.0			
Phase C	0.000	Phase C	0.000	Phase C	0.000	Phase C	0.0			
Pos. Seq.	0.000	Pos. Seq.	0.000	Pos. Seq.	0.000	VG	0.0			
Neg. Seq.	0.000	Neg. Seq.	0.000	Neg. Seq.	0.000	Pos. Seq.	0.0			
Zero Seq.	0.000	Zero Seq.	0.000	Zero Seq.	0.000	Neg. Seq.	0.0			
Restr. Currents (pu)		Phase Differential (pu)		Ground Differential (A)		Misc				
Phase A	0.00	Phase A	0.00	W2	0.00	Freq (Hz)	Disabled			
Phase B	0.00	Phase B	0.00	W3	0.00	V/Hz (%)	0.0			
Phase C	0.00	Phase C	0.00							
Power (pu)										
Real	0.0000	Reactive	0.0000	Apparent	0.0000	Factor	0.00			
Inputs										
1	2	3	4	5	6	7	8	9	10	11
12	13	14	15	16	17	18	TC 1	TC 2	CC 1	CC 2
Outputs										
1	2	3	4	5	6	7	8			
9	10	11	12	13	14	15	16			
Status										
Breaker 1 Closed										
Breaker 2 Closed										
Osc Triggered										
Targets										

Event Log Trigger

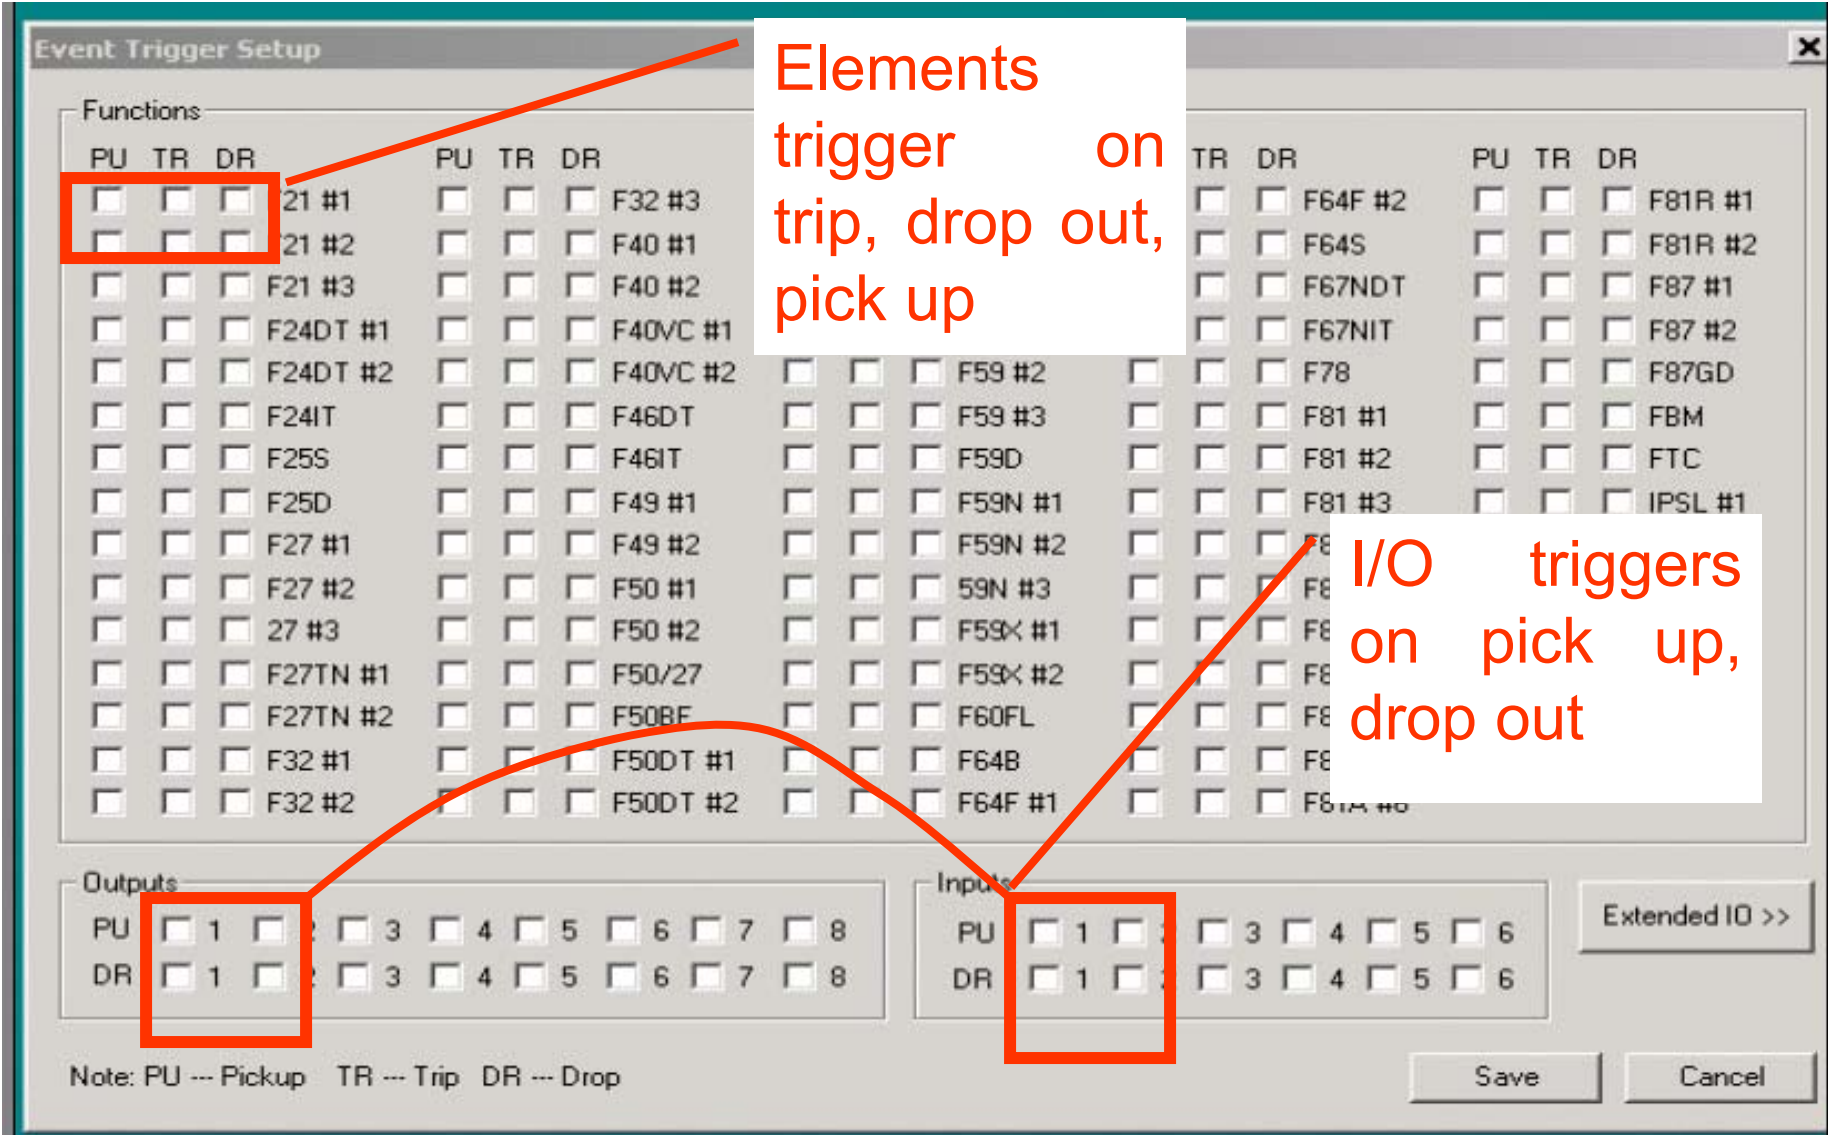

Event Trigger Setup

Functions

PU	TR	DR	Element	PU	TR	DR	Element	TR	DR	Element	PU	TR	DR	Element
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F21 #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F32 #3	<input type="checkbox"/>	<input type="checkbox"/>	F64F #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F81R #1
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F21 #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F40 #1	<input type="checkbox"/>	<input type="checkbox"/>	F64S	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F81R #2
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F21 #3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F40 #2	<input type="checkbox"/>	<input type="checkbox"/>	F67NDT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F87 #1
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F24DT #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F40VC #1	<input type="checkbox"/>	<input type="checkbox"/>	F67NIT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F87 #2
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F24DT #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F40VC #2	<input type="checkbox"/>	<input type="checkbox"/>	F78	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F87GD
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F24IT	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F46DT	<input type="checkbox"/>	<input type="checkbox"/>	F81 #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	FBM
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F25S	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F46IT	<input type="checkbox"/>	<input type="checkbox"/>	F81 #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	FTC
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F25D	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F49 #1	<input type="checkbox"/>	<input type="checkbox"/>	F81 #3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	IPSL #1
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F27 #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F49 #2	<input type="checkbox"/>	<input type="checkbox"/>	F81 #4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F27 #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50 #1	<input type="checkbox"/>	<input type="checkbox"/>	F81 #5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F27 #3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50 #2	<input type="checkbox"/>	<input type="checkbox"/>	F81 #6	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F27TN #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50/27	<input type="checkbox"/>	<input type="checkbox"/>	F81 #7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F27TN #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50BE	<input type="checkbox"/>	<input type="checkbox"/>	F81 #8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F32 #1	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50DT #1	<input type="checkbox"/>	<input type="checkbox"/>	F81 #9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F32 #2	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	F50DT #2	<input type="checkbox"/>	<input type="checkbox"/>	F81 #10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	

Outputs

PU	1	2	3	4	5	6	7	8
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DR	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Inputs

PU	1	2	3	4	5	6
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
DR	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: PU --- Pickup TR --- Trip DR --- Drop

Buttons: Save, Cancel, Extended IO >>

Annotations:

- Red box around TR, DR checkboxes for F21 #1, #2, #3.
- Red box around PU, TR, DR checkboxes for Output 1.
- Red box around PU, DR checkboxes for Input 1.
- Text box: "Elements trigger on trip, drop out, pick up" with an arrow pointing to the TR, DR checkboxes in the Functions table.
- Text box: "I/O triggers on pick up, drop out" with an arrow pointing to the PU, DR checkboxes in the Inputs table.

Sequence of Events Recorder (total 512 Events are stored)

View Sequence of Events Record Close


Open Print Print Preview

No	Event Summary
43	10/18/2006, 15:31:12.000 F24 IT: Pickup/Timeout/
44	10/18/2006, 15:33:17.000 F24 IT: Pickup/Timeout/
45	10/18/2006, 15:33:44.000 F24 IT: Pickup/Timeout/
46	10/18/2006, 15:34:05.000 F24 IT: Pickup/Timeout/
47	10/18/2006, 15:34:12.000 F24 IT: Pickup/Timeout/
48	10/18/2006, 15:35:48.000 F24 IT: Pickup/Timeout/
49	10/18/2006, 15:36:09.000 F24 IT: Pickup/Timeout/
50	10/18/2006, 15:36:14.000 F24 IT: Pickup/Timeout/
51	10/18/2006, 15:36:48.000 F24 IT: Pickup/Timeout/
52	10/18/2006, 15:54:28.000 F24 IT: Pickup/Timeout/
53	10/18/2006, 15:55:20.000 F24 IT: Pickup/Timeout/

Item	Value	Unit
VB	180.0	V
VG	0.0	V
IA W1	0.00	A
IB W1	0.00	A
IC W1	0.00	A
IA W2	0.00	A
IB W2	0.00	A
IC W2	0.00	A
IA W3	0.00	A
IB W3	0.00	A
IC W3	0.00	A
IA W4	0.00	A
IB W4	0.00	A
IC W4	0.00	A
IG W2	0.00	A
IG W3	0.00	A
IG W4	0.00	A
V/HZ	149.9	%
Freq	60.02	Hz
IA Restr.	0.00	pu
IB Restr.	0.00	pu

Inputs PU		Inputs DR	
<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 1	<input type="checkbox"/> 2
<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 3	<input type="checkbox"/> 4
<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 5	<input type="checkbox"/> 6
<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 7	<input type="checkbox"/> 8
<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 9	<input type="checkbox"/> 10
<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 11	<input type="checkbox"/> 12
<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 13	<input type="checkbox"/> 14
<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 15	<input type="checkbox"/> 16
<input type="checkbox"/> 17	<input type="checkbox"/> 18	<input type="checkbox"/> 17	<input type="checkbox"/> 18

Outputs PU		Outputs DR	
<input checked="" type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 1	<input type="checkbox"/> 2
<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 3	<input type="checkbox"/> 4
<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 5	<input type="checkbox"/> 6
<input type="checkbox"/> 7	<input type="checkbox"/> 8	<input type="checkbox"/> 7	<input type="checkbox"/> 8
<input type="checkbox"/> 9	<input type="checkbox"/> 10	<input type="checkbox"/> 9	<input type="checkbox"/> 10
<input type="checkbox"/> 11	<input type="checkbox"/> 12	<input type="checkbox"/> 11	<input type="checkbox"/> 12
<input type="checkbox"/> 13	<input type="checkbox"/> 14	<input type="checkbox"/> 13	<input type="checkbox"/> 14
<input type="checkbox"/> 15	<input type="checkbox"/> 16	<input type="checkbox"/> 15	<input type="checkbox"/> 16

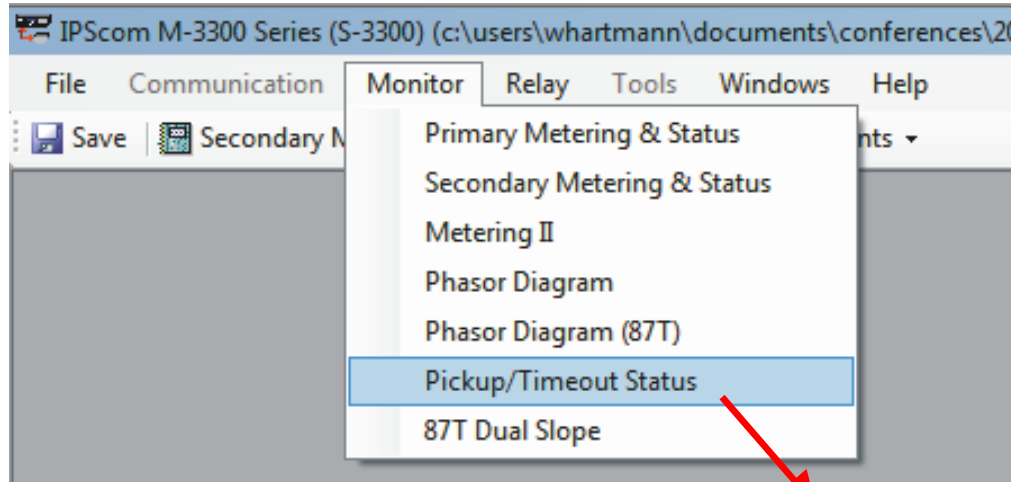

Function Status (Targets)

Pickup/Timeout Status

Function Pickup/Timeout

<input type="radio"/> 24 DT #1	<input type="radio"/> 50 #4	<input type="radio"/> 50N #5	<input type="radio"/> 59G #2	<input type="radio"/> TCM #2
<input type="radio"/> 24 DT #2	<input type="radio"/> 50 #5	<input type="radio"/> 50N #6	<input type="radio"/> 59G #3	<input type="radio"/> CCM #1
<input type="radio"/> 24 IT	<input type="radio"/> 50 #6	<input checked="" type="radio"/> 51 #1	<input type="radio"/> 87 #1	<input type="radio"/> CCM #2
<input type="radio"/> 27 #1	<input type="radio"/> 50BF W1	<input type="radio"/> 51 #2	<input type="radio"/> 87 #2	<input type="radio"/> IPSlogic #1
<input type="radio"/> 27 #2	<input type="radio"/> 50BF W2	<input type="radio"/> 51 #3	<input type="radio"/> 87 #3	<input type="radio"/> IPSlogic #2
<input type="radio"/> 27 #3	<input type="radio"/> 50BF W3	<input type="radio"/> 51G W2	<input type="radio"/> 87 #4	<input type="radio"/> IPSlogic #3
<input type="radio"/> 46 DT W2	<input type="radio"/> 50G W2 #1	<input type="radio"/> 51G W3	<input checked="" type="radio"/> 87H	<input type="radio"/> IPSlogic #4
<input type="radio"/> 46 IT W2	<input type="radio"/> 50G W2 #2	<input type="radio"/> 51N #1	<input type="radio"/> 87T	<input type="radio"/> IPSlogic #5
<input type="radio"/> 46 DT W3	<input type="radio"/> 50G W3 #1	<input type="radio"/> 51N #2	<input type="radio"/> 87GD W2 #1	<input type="radio"/> IPSlogic #6
<input type="radio"/> 46 IT W3	<input type="radio"/> 50G W3 #2	<input type="radio"/> 51N #3	<input type="radio"/> 87GD W2 #2	<input type="radio"/> BM W1
<input type="radio"/> 49	<input type="radio"/> 50N #1	<input type="radio"/> 59 #1	<input type="radio"/> 87GD W3 #1	<input type="radio"/> BM W2
<input type="radio"/> 50 #1	<input type="radio"/> 50N #2	<input type="radio"/> 59 #2	<input type="radio"/> 87GD W3 #2	<input type="radio"/> BM W3
<input type="radio"/> 50 #2	<input type="radio"/> 50N #3	<input type="radio"/> 59 #3	<input type="radio"/> TF	
<input type="radio"/> 50 #3	<input type="radio"/> 50N #4	<input type="radio"/> 59G #1	<input type="radio"/> TCM #1	

Inputs

1	2	3	4	5	6	7	8	9
10	11	12	13	14	15	16	17	18



Outputs

1	2	3	4	5	6	7	8
9	10	11	12	13	14	15	16

Annotations:

- 51#1 is picked up (indicated by a green dot and a purple arrow)
- 87T has tripped (indicated by a red dot and a purple arrow)

Differential Plot

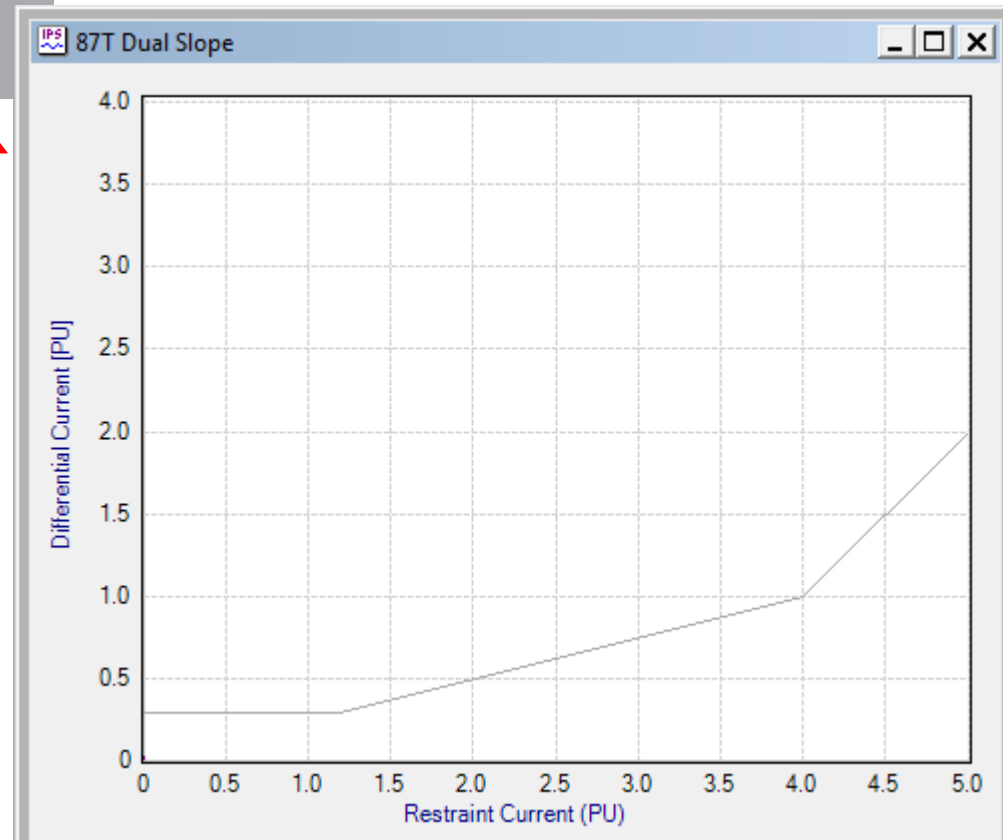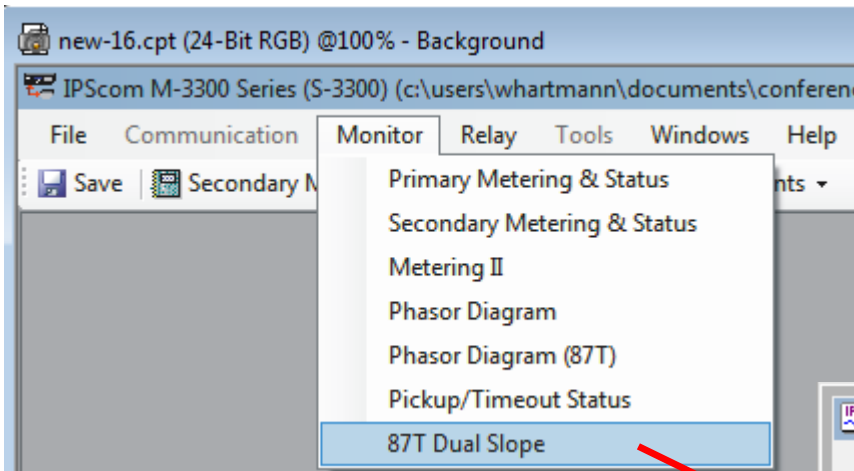

Retrieve Target Log

