



Tauri Series Temperature-Check Tablets

Stand-alone instant alert — ¼ second scan from 3 feet



TTS-10

10.1" panel




TTS-15

15.6" panel

TTS-21

21.5" panel

Add an extra **layer of protection** to your facility and help protect your most valuable assets—**your human assets**

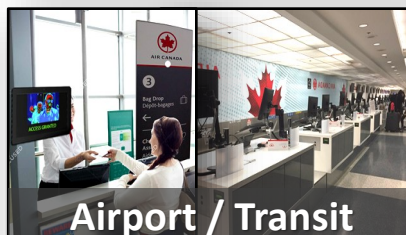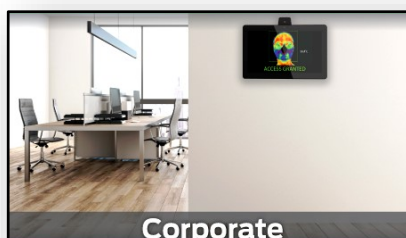
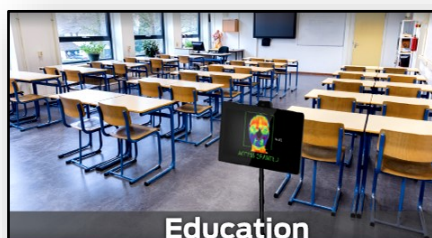


Tauri Series Temperature-Check Tablets

Steps / Functionalities / Options



Step 1:

- Step within 3 feet to check temperature

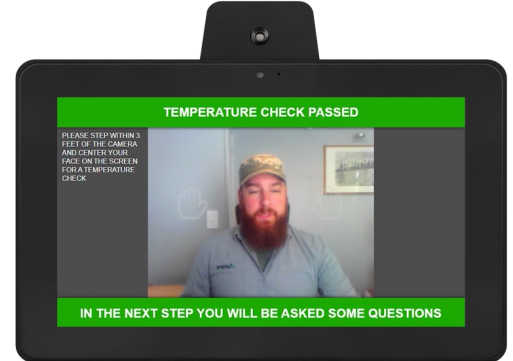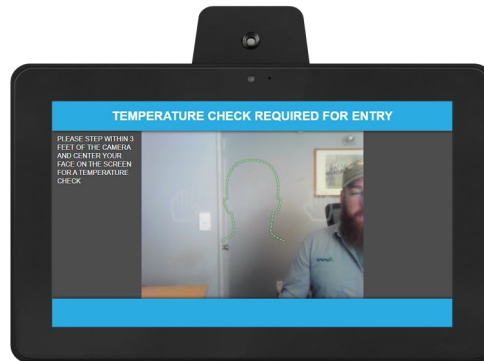






Step 2 (optional):

- Answer question(s) (optional/customizable)
- Raise right hand (yes)
- Raise left hand (no)
- No touch required

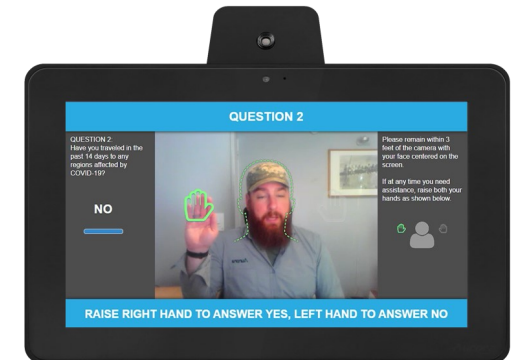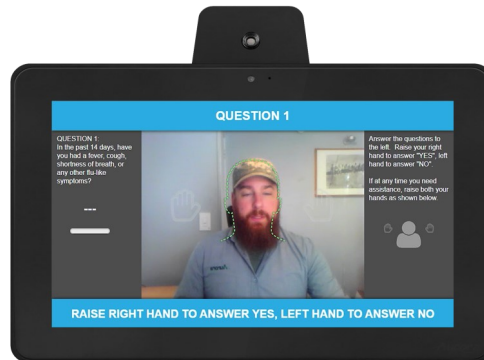

Step 3:


- Provide instructions for pass / warnings / fail
- Instant e-mail alerts to admin/ security as required
- Accessible via web/cell

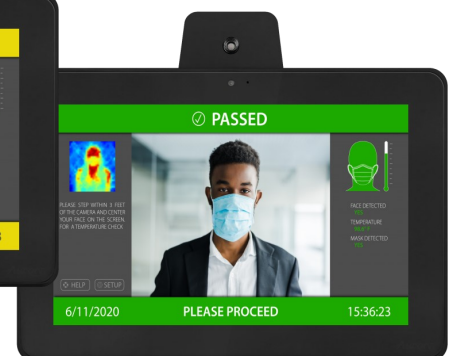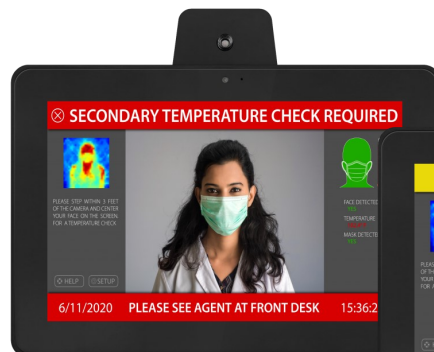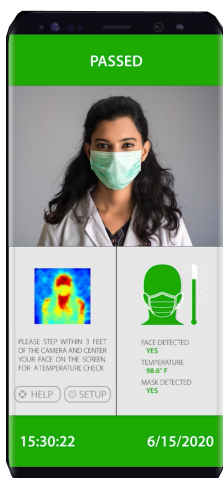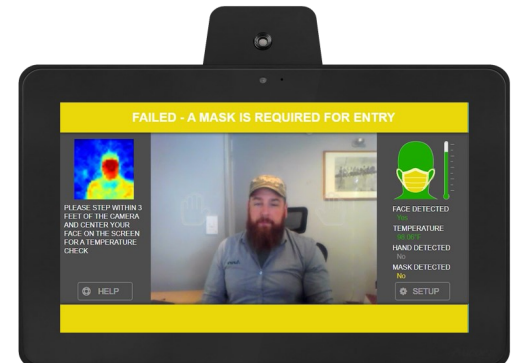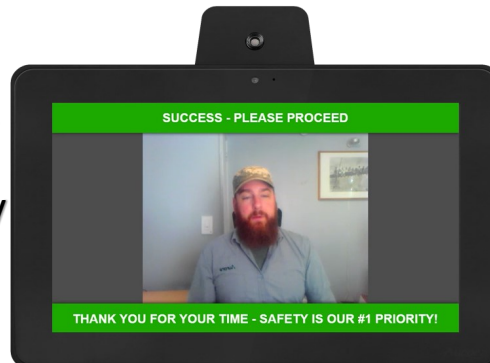

Increase safety with a quick temperature check

To ensure that individuals entering a location are not running a high temperature, Aurora Technologies introduces the new infrared temperature sensor/detector. It provides alerts when a person is running a high temperature within 1 second.

The system uses an advanced algorithm for detecting and calculating heat signatures. Based on technology developed in Germany, the highly accurate sensor measures with a tolerance of +/- 0.3 degrees Celsius (+/- 0.5 degrees Fahrenheit). Tauri tablets also come with a 2-year warranty.

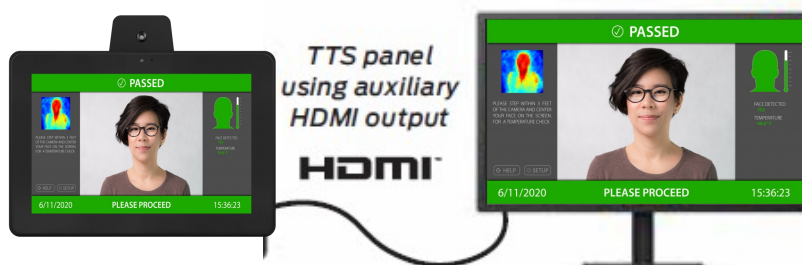

Options:

- APS-1 adjustable pole stand with weighted base
- WMT-1 wall mount / DTM-1/DTM-2 desktop stands
- Firmware upgrade options:
 - ReAX control engine for integration with 3rd party devices
 - Photo & thermal result email / signage alerts
 - Customized flagging
 - Digital signage capabilities

TAURI + **ReAX**

Why a temperature sensor?

- Provides first layer of screening protection
- Hygienic with non-touch IR technology
- Multiple devices monitored by a single user
- Camera reversible 180°



Tauri (patents pending) is a partnership between Aurora and GloryStar



TTS panel shown with optional APS-1 pole stand



WMT-1 wall mount



DTM-1 desktop mount



DTM-2 desktop mount



DTM-3 desktop mount

The TAURI Temperature-Check Tablets are designed to detect temperature anomalies. It's important to understand there are many factors, including environmental and physiological that can impact a person's surface temperature reading. Skin surface temperature vs actual core body temperature may differ either way. The TAURI Temperature-Check Tablets must be operated in accordance with the manufacturer's user guide. TAURI Temperature-Check Tablets are not intended nor designed to diagnose or detect medical conditions including, but not limited to, viruses or other illnesses. The TAURI temperature-check tablets should only be used to detect variations in surface temperature. In the event that an elevated skin temperature is detected, the subject should be advised to check temperature with an approved medical thermometer and the finding confirmed. Absence of an elevated skin temperature does not preclude a fever.

Tauri—Full Specification

Specification:		TTS-10	TTS-15	TTS-21
Screen Size		10''	15.6''	21.5''
Panel Information	Resolution	1280 x 800	1920 x 1080	
	Aspect ratio	16:10	16:9	
	Touch Tech	5 point cap touch	10 point cap touch	
Audio	Speaker	1W x 2	2W x 2	
Video/Image	Auxiliary Video	HDMI output for remote monitoring of results		
	Audio format	MP3 / WMA / AAC etc...		
	Image format	JPEG, BMP, PNG		
Hardware & OS	CPU	2GB DDR3RK3288 Cortex A17, Quad core 1.8GHz		
	RAM	2GB DDR3		
	ROM	8GB eMMC Flash		
	OS	Android 7.1		
Communication	Bluetooth	EDR 4.0		
	WiFi	802.11b/g/n 2.4GHz and 5GHz		
	Ethernet	10/100 LAN		
Infrared Temperature Sensor	Power Input	3.3-3.6V, 50mA, USB connect		
	Size	65.2mm x 38.5mm x 22mm		
	Check distance	0.3m—1m		
	Check range	30°C to 45°C		
General Information	Sensors	G-Sensor		
	AV Capability	Front Facing Camera 2MP fixed foccus		
	I/O	HDMI output, RJ45x1, USBx1, SD slotx1, Micro-USBx1, 3.5mm audiox1, Recoverx1, expandable 2USB	HDMI output, RJ45x1, USBx1, SD slotx1, Micro-USBx1, 3.5mm audiox1, Recoverx1, GPIO Support	HDMI output, RJ45x1, USBx1, SD slotx1, Micro-USBx1, 3.5mm audiox1, Recoverx1, RS232x2, GPIO Support
	Power Input	12V 2A or PoE	12V 5A	
	Operating Environment	Operating: 0°C to 40°C Storage –20°C to 50°C		
	Language	Multi language		
	Warranty	2 Years		
	Dimension	Size (WXDXH)	267 x 34 x 165 mm	383.8 x 223.2 x 30.1 mm
Product Weight		700g	1.4Kg	3.8Kg