



Tauri Series Temperature-Check Tablets

Stand-alone instant alert — ¼ second scan from 3 feet



TTS-10

10.1" panel




TTS-15

15.6" panel

TTS-21


21.5" panel

Add an extra **layer of protection** to your facility and help protect your most valuable assets—**your human assets**

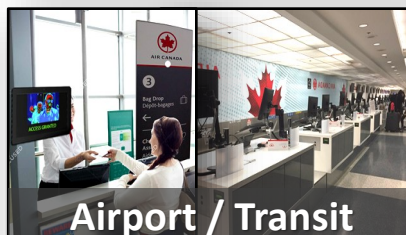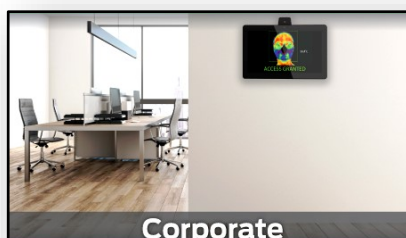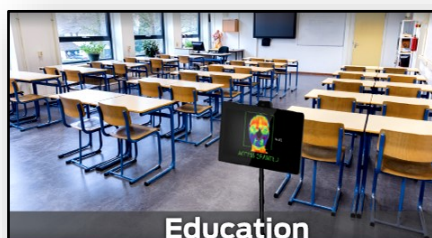

Increase safety with a quick temperature check

To ensure that individuals entering a location are not running a high temperature, Aurora Technologies introduces the new infrared temperature sensor/detector. It provides alerts when a person is running a high temperature within 1 second.

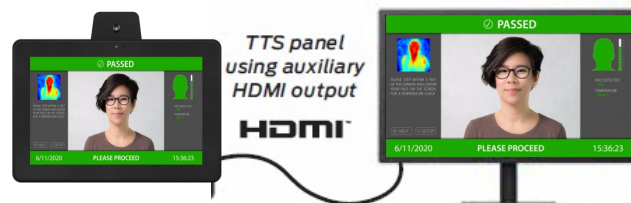

The system uses an advanced algorithm for detecting and calculating heat signatures. Based on technology developed in Germany, the highly accurate sensor measures with a tolerance of +/- 0.3 degrees Celsius (+/- 0.5 degrees Fahrenheit). Tauri tablets also come with a 2-year warranty.

Options:

- APS-1 adjustable pole stand with weighted base
- WMT-1 wall mount / DTM-1/DTM-2 desktop stands
- Future firmware upgrade options:
 - Photo & thermal result email / signage alerts
 - Customized flagging
 - ReAX control / Integration with 3rd-party control and access systems

Why a temperature sensor?

- Provides first layer of screening protection
- Hygienic with non-touch IR technology
- Multiple devices monitored by a single user
- Camera reversible 180°



Specification:		TTS-10	TTS-15	TTS-21
Panel Information	Resolution	1280 x 800	1920 x 1080	
	Aspect ratio	16:10	16:9	
	Touch Tech	5 point cap touch	10 point cap touch	
Audio	Speaker	1W x 2	2W x 2	
Communication	Bluetooth	EDR 4.0		
	WiFi	802.11b/g/n 2.4GHz and 5GHz		
	Ethernet	10/100 LAN		
General Information	Sensors	G-Sensor		
	Power Input	12V 2A or PoE	12V 5A	
	Operating Environment	Operating: 0°C to 40°C Storage –20°C to 50°C		
	Language	Multi language		
Dimension	Size (WDXH)	267 x 34 x 165 mm	383.8 x 223.2 x 30.1 mm	534.5 x 326 x 47.6326 mm
	Product Weight	700g	1.4Kg	3.8Kg