

QPB A

FEATURES

- Constant current circuit for steady lumen output along the strip.
- Suitable for wall wash for indoor
- Unique optical performance with high evenness of light spread of 12°, 15°, 22°, 30°, 55°, 15x45°, Unique 180°-wiveling brackets
- UV filtering option, Louver options for glare cut.
- Dust and water protection with UV stabilized clear cover
- IP Rate IP40
- Maximized evenness of CCT and brightness by professional bin management.
- Wide range of CCT options (2000K ~ 7000K)
- A short increment for precise fitting
- Bespoke option for CCT, CRI, Watt



PROTECTED



LOT TRACEABILITY



BESPOKE PRODUCTION



PLUG AND PLAY



LONG SERIAL RUN



DIMMING COMPATIBILITY



A VERY DURABLE LIFE

PRODUCT DESCRIPTION CODES / SPECIFICATIONS

A- 40H-1HC3-24-90-3- QA22SC2

1 2 3 4 5 6 7 8 9 10 11


1 NAME ACROSENTEC

2 CCT ... Normal White



CRI typ 95

Warm White



Beam Angle

10°, 10°*20°, 25°, 30°, 40°, 60°, 15x45°
15°, 20°, 30°, 55°

Normal White



CRI typ 85

Warm White



Beam Angle

10°, 10°*20°, 25°, 30°, 40°, 60°, 15x45°
15°, 20°, 30°, 55°

3 Level of CRI H : CRI typ 95, Blank : CRI typ 85

4 LED pitch(inch/mm) Refer to the Dimenion

5 Input VOLT(DC) 24 V

6 Length of add-on(inch/mm) 3.54"/ 90mm, 7.1"/ 180mm

7 Quantity of add-on Variable

8 Product model QPB A

9 Beam Angle Refer to the table

10 Feed receptacle S : Single end LW, B : Both ends LW,
QM, QF, QMF4

11 IP Rate C2 : IP40





Dimming PWM, DALI, 0-10, DMX

Operation Temp(°F/°C) Ta : -13~122 / -25~50

Expected Life Hours 60000 Hrs

Fastening Accessory Bracket (QP)

- Bespoke option in FH, HC spectrum -

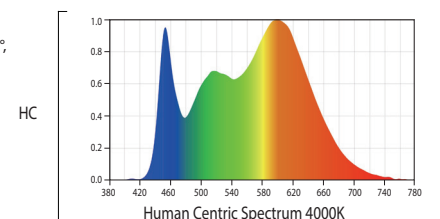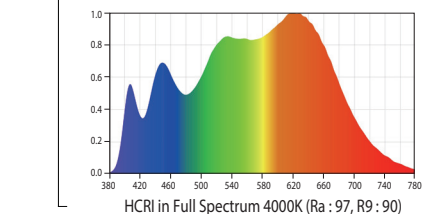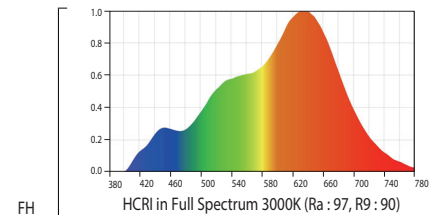


acrosentec

QPB A		A-◇(H)-1HC3-24-90-□-QA☆SC2	A-◇(H)-1HC3-24-180-□-QA☆SC2
Lumen / 3' 3.4", 1MTR (CRI typ 85)	6500K, 5600K	3163	3630
	4000K, 3500K	3056	3498
	3000K	2940	3102
	2700K	2900	3036
	2450K	2475	-
	2200K	2384	-
	2000K	2194	-
Lumen / 3' 3.4", 1MTR (CRI typ 95)	6500K, 5600K	2567	3003
	4000K, 3500K	2445	2805
	3000K	2369	2442
	2700K	2323	2343
⑨ Beam Angle		15°, 20°, 30°, 55°	10°, 10°*20°, 25°, 30°, 40°, 60°, 15x45°
Power Consumption (Watt) 3' 3.4", 1Meter		33	
Power Feed direction		REAR	
Color of Fixture		Silver, Matt black, Ral, Transparent cover	
Net Wt(lb/Kg) / 3' 3.4", 1Meter		3.31 / 1.5	
Feed Accessory		QM, QF, QMF4 / LW	
Max PCB length of a single product (ft/mm)		6' 3.6" / 1920	6' 3.6" / 1920
Max Serial run of PCB (ft/mm)		9' 5.4" / 2880	9' 5.4" / 2880
⑥ Add on PCB Length Option		3.54" / 90mm	7.1" / 180mm
Total Product Length		Multiple of 3.54" / 90mm	Multiple of 7.1" / 180mm

* Data is subject to change without notice for improvement

DIMENSION

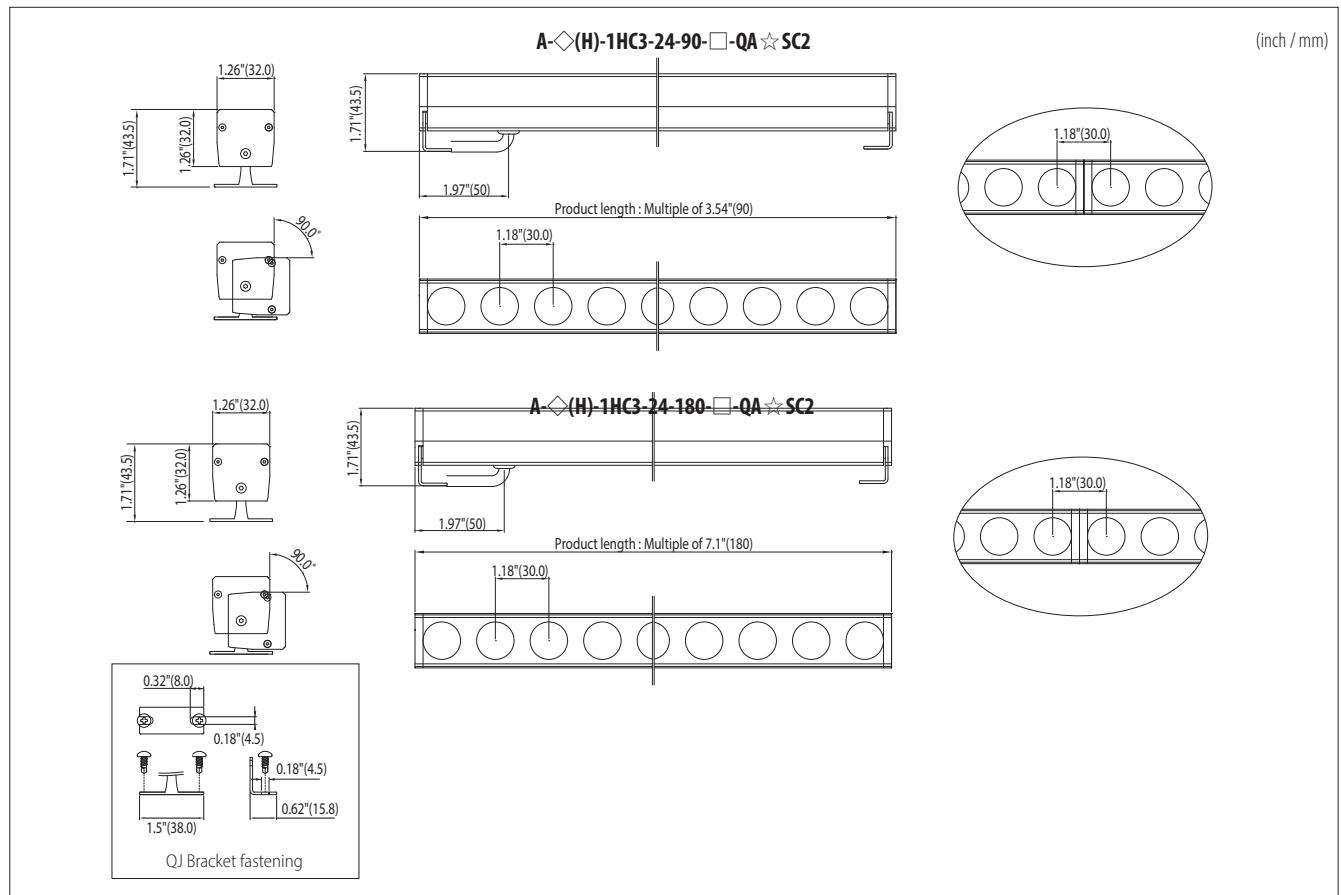

* Data is subject to change without notice for improvement