



Meiyad 美 亞 迪



深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd.

电话/Tel: +86-0755-82687591

微信/Wechat: +86 185 6623 8999

邮箱/Email: sales@mydled.com

地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋
Add: No.9 building, Nangang third industrial park, Tangtou
village, Shiyan town, Bao'an district, Shenzhen, China 518108

Meiyad®

美 亞 迪



MEIYAD
OPTOELECTRONICS
A LEADING CREATIVE LED DISPLAY MANUFACTURER


企业简介 >>

深圳市美亚迪光电有限公司成立于2008年，是一家专注于LED显示屏研发、生产、销售和服务的国家高新技术企业，拥有深圳、湖北、广西、四川4大生产制造基地，占地60多万平米，员工3500多人。

美亚迪产品广泛应用于户内外商业传媒、体育场馆、舞台演绎、异形创意等应用领域，拥有8000多个成功案例，遍布全球上百个国家，获得国际知名品牌的信赖，捕捉数千万观众的焦点。美亚迪始终坚持“高性能产品、高标准技术、高质量服务”的经营理念，以客户为中心，基于客户需求持续创新，赢得了客户的尊重和信赖，美亚迪光电先后获得国家高新技术企业、LED行业十大技术领军企业、中国LED显示屏十大应用品牌、信用评级AAA级信用企业等称号，已通过ISO9001:2008质量管理体系认证、ISO14001环境管理体系认证、18001安全管理体系认证、CCC、ROSH、BIS、节能认证以及TUV机构认定的CE、CB认证和FCC报告，这使得美亚迪产品在市场上更具有权威性和说服力。产品软硬件的创新、服务体系的不断完善，美亚迪光电定位于成为全球LED应用产品研发、制造、销售和服务为一体的旗舰航母。

Shenzhen Meiyad Optoelectronics Co., Ltd. was founded in 2008, national high-tech enterprise which is focusing on R&D, manufacturer, sales and service of LED display. Four production bases in Shenzhen, Hubei, Guangxi and Sichuan, more than 600,000sqm and more 3,500 employees. Meiyad's products are widely used in indoor&outdoor commercial media, sports venues, stage performances, special-shaped creativity and other application fields. More than 8,000 successful cases and spreads in hundreds of countries on overseas, Meiyad had won trust of internationally renowned brands and captured tens of millions of audiences.

Meiyad always adheres to the business philosophy of "high-performance products, high-standard technology and high-quality service", and focus on customers and innovate based on customers' demands, which had won client's respect and trusts. LED industry's top ten technology leaders, China's top ten LED display application brands, credit rating AAA credit enterprise and other titles, and passed ISO9001:2008 quality management system certification, ISO14001 environmental management system certification, 18001 safety management system certification, CCC, ROSH, BIS, energy-saving certification, CE, CB certification and FCC report recognized by TUV agency, all the certificates make Meiyad products more authoritative and convincing in the LED market. Innovation on product software and hardware and the constant improvement of service system, Meiyad Optoelectronics is positioned to become a flagship aircraft carrier integrating R&D, manufacture, sales and service of global LED application products.

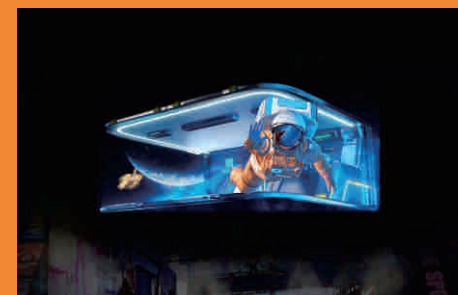

发展历程 Development course



荣誉资质 Honorary certificate

- LED优秀品牌供应商
- LED柔性屏优秀品牌
- LED柔性屏知名品牌
- LED创意显示卓越品牌
- 十佳LED柔性显示及透明显示应用屏品牌
- isle显示“新星产品奖”
- 国庆70周年群众游行地方彩车“匠心奖”

- Excellent LED supplier
- LED flexible screen excellent brand
- LED flexible screen well-known brand
- LED creative display excellent brand
- Top ten LED flexible display and transparent display application screen brands
- ISLE Display "New Product Award"
- "Ingenuity Award" for Local Floats in the 70th National Day Parade



ISO45001



ISO9001



ISO14001



Chinese Energy Saving Product



Chinese Energy Saving Product



CCC



CCC



ROHS



TUV-CE-EMC



TUV-CE-LVD



TUV-CB



TUV-FCC



BIS



Invention Patent



Utility model Patent



Appearance Patent

Meiyad®


美亚迪

室外柔性显示屏

Outdoor Flexible LED Display



案例 Case

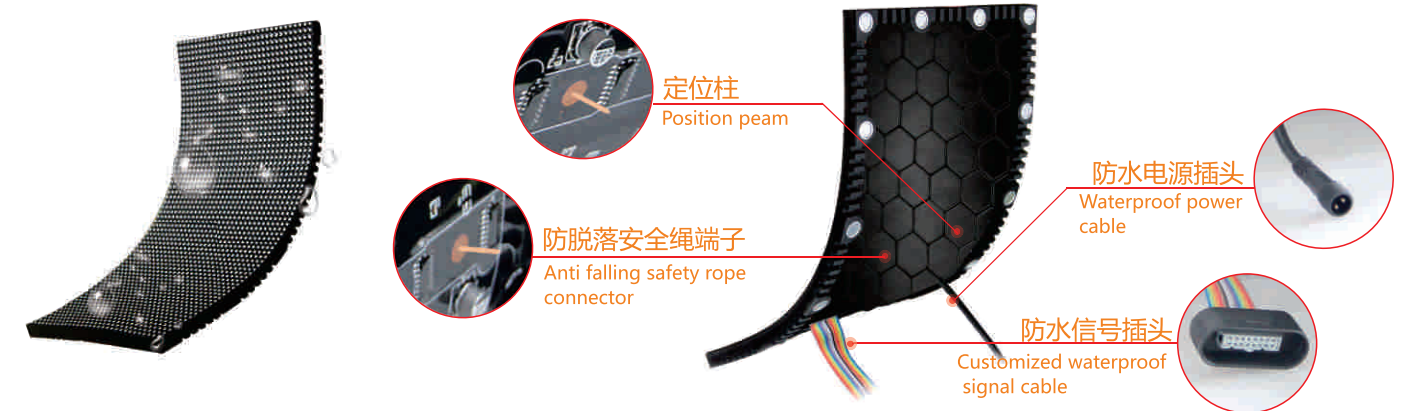

产品参数 (Product Specification)

像素间距 (Pixel Pitch)	4mm
模组尺寸 (Module Size)	256*128mm
模组分辨率 (Cabinet Resolution)	64x32 Pixles
灰度等级 (Gray Scale)	≥12Bit
显示亮度 (Brightness)	≥4500 nits
色温 (Color Temperature)	9000±500K
输入电压 (Input Voltage)	AC100~220V
使用环境 (Environment)	室外 Outdoor



历经4次技术革新
4 Times Technical
Innovations



历经6年市场验证
6 Years' Market
Experience



硅胶软底壳一体注塑成型
Silicone Soft Bottom Shell
Integrated Injection Molding



折弯弧度120°, 10000次折叠
Max 120° Bending,
10000+Times Folding Test



9.6mm极致轻薄
9.6mm Super Slim

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

室内柔性显示屏

Indoor Flexible LED Display



历经6次技术革新
6 Times Technical
Innovations



历经8年市场验证
8 Years' Market
Experience



折弯弧度120°, 10000次折叠
Max 120° Bending,
10000+Times Folding Test



9.6mm极致轻薄
9.6mm Super Slim

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

案例 Case



产品参数 (Product Specification)

像素间距 (Pixel Pitch)	1.538mm	1.667mm	1.86mm	2mm	2.5mm	3.076mm
模组尺寸 (Module Size)	320X160mm					
模组分辨率 (Cabinet Resolution)	208*104 Pixles	192*96 Pixles	172*86 Pixles	160*80 Pixles	128*64 Pixles	104*52 Pixles
灰度等级 (Gray Scale)	≥12Bit					
显示亮度 (Brightness)	≥800 nits					
色温 (Color Temperature)	9000±500K					
输入电压 (Input Voltage)	AC100~220V					



产品参数 (Product Specification)

像素间距 (Pixel Pitch)	1.25mm	1.5625mm	1.875mm	2mm	2.5mm	3mm
模组尺寸 (Module Size)	240*120mm	250*100mm	240*120mm	240*120mm	240*120mm	240*120mm
模组分辨率 (Cabinet Resolution)	192*96 Pixles	160*64 Pixles	128*64 Pixles	120*60 Pixles	96*48 Pixles	80*40 Pixles
显示亮度 (Brightness)	≥600 nits		≥800 nits			
灰度等级 (Gray Scale)	≥14Bit					
色温 (Color Temperature)	9000±500K					
输入电压 (Input Voltage)	AC100~220V					

固装显示屏

Fixed Installation LED Display



户外亮度可达10000nits
Max 10,000 Nits



刷新可达3840Hz
Max 3840Hz



低功耗节能环保
Energy Saving



前后双维护
Front&Rear Service




阻燃性能优良
Good Fire Retardancy

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

案例 Case

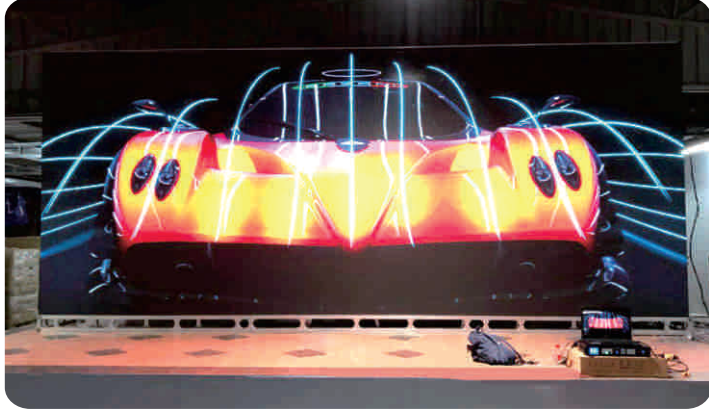

产品参数 (Product Specification)

室内款(Indoor Model)					
像素间距 (Pixel Pitch)	1.25mm	1.538mm	1.86mm	2mm	2.5mm
箱体尺寸 (Cabinet Size)	640*480mm				
模组尺寸 (Module Size)	320*160mm				
箱体分辨率 (Cabinet Resolution)	512*384 Pixles	416*312 Pixle	344*258 Pixle	320*240 Pixle	256*192 Pixle
像素密度 (Pixel Density)	640000 Pixles/m²	422500 Pixles/m²	288906 Pixles/m²	250000 Pixles/m²	160000 Pixles/m²
显示亮度 (Brightness)	≥600 nits	≥600 nits	≥800 nits	≥800 nits	≥800 nits



室外款(Outdoor Model)					
像素间距 (Pixel Pitch)	4mm	5mm	6mm	8mm	10mm
模组尺寸 (Module Size)	320*160mm		192*192mm	320*160mm	320*160mm
模组分辨率 (Module Resolution)	80 *40 Pixles	64*32 Pixles	32 *32 Pixles	40 *20 Pixles	32 *16 Pixles
像素密度 (Pixel Density)	62500 Pixles/m²	40000 Pixles/m²	27777 Pixles/m²	15625 Pixles/m²	10000 Pixles/m²
显示亮度 (Brightness)	≥6000nits	≥6000nits	≥5500nits	≥6000nits	≥6500nits
观看角度 (Viewing Angle)	≥140°				
刷新频率 (Refresh Rate)	1920Hz~3840Hz				
灰度等级 (Gray Scale)	≥12Bit				
色温 (Color Temperature)	8000±500K				
输入电压 (Input Voltage)	AC100~220V				

小间距显示屏

Fine Pitch LED Display

Meiyad®
美 亚 迪



电源信号双备份
Power Signal Dual Backup



灰度等级16Bit
Max 16Bit



独家定制箱体
Customized Cabinet



箱体厚度薄至34mm
34mm Thickness




刷新可达7680Hz
Max 7680Hz

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

案例 Case

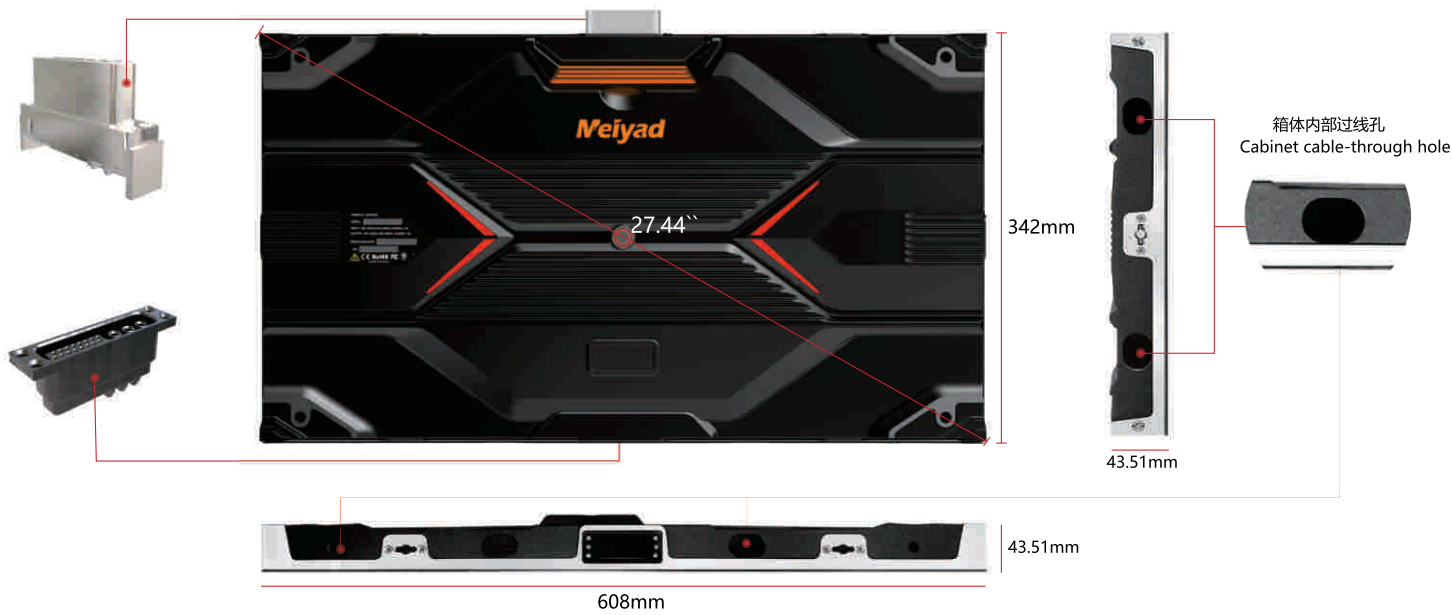

产品参数 (Product Specification)

箱体尺寸 (Cabinet Size)	608*342mm(A款)			
像素间距 (Pixel Pitch)	1.267mm	1.461mm	1.58mm	1.9mm
箱体分辨率 (Cabinet Resolution)	480*270 Pixles	416*234 Pixles	384*216 Pixles	320*180 Pixles
像素密度 (Pixel Density)	622080 Pixles/m ²	467251 Pixles/m ²	398131 Pixles/m ²	276480 Pixles/m ²
箱体尺寸 (Cabinet Size)	600*337.5mm(B款)			
像素间距 (Pixel Pitch)	0.9375mm	1.2mm	1.5mm	1.8mm
箱体分辨率 (Cabinet Resolution)	640x360 Pixles	480x270 Pixle	384x216 Pixle	320x180 Pixle
像素密度 (Pixel Density)	1137770 Pixles/m ²	640000 Pixles/m ²	409600 Pixles/m ²	284089 Pixles/m ²
观看角度 (Viewing Angle)	≥140°			
刷新频率 (Refresh Rate)	≤7680Hz			
灰度等级 (Gray Scale)	≥14Bit			
色温 (Color Temperature)	9000±500K			
输入电压 (Input Voltage)	AC100~220V			

Meiyad®

美 亞 迪

租赁显示屏

Rental LED Display



护角防磕碰设计
Anti-Collision Corner



正负15°弧度锁
±15° Arc Lock



3秒快速安装
3 Seconds Fast
Installation



独立电源盒,快速维护
Independent Power Box
Fast Maintenance




均流电源设计, 永不黑屏
Current Sharing Power
Supply, Refuse Blank Screen

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

产品 Product

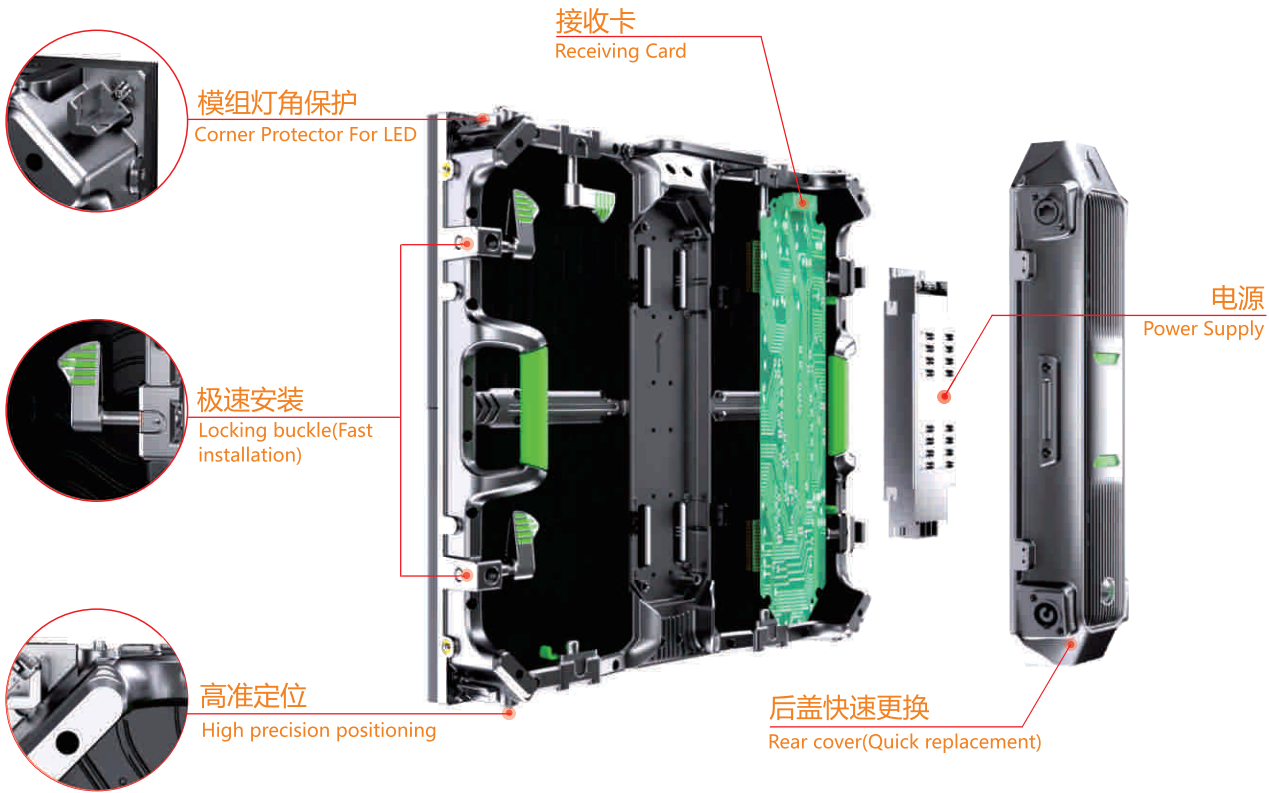


产品参数 (Product Specification)

使用环境 (Environment)	室内 (Indoor)			室外 (Outdoor)		
像素间距 (Pixel Pitch)	2.6mm	2.976mm	3.91mm	2.976mm	3.91mm	4.81mm
模组尺寸 (Module Size)	250*250mm					
箱体尺寸 (Cabinet Size)	500*500mm/500*1000mm					
像素密度 (Pixel Density)	147456Pixles/m ²	112896Pixles/m ²	65536Pixles/m ²	112896Pixles/m ²	65536Pixles/m ²	43264Pixles/m ²
显示亮度 (Brightness)	≥1000 nits			≥4500 nits		
刷新频率 (Refresh Rate)	1920Hz~3840Hz					
灰度等级 (Gray Scale)	≥14Bit					
色温 (Color Temperature)	9000±500K					
输入电压 (Input Voltage)	AC100~220V					

LED透明贴膜屏

Transparent Film LED Display

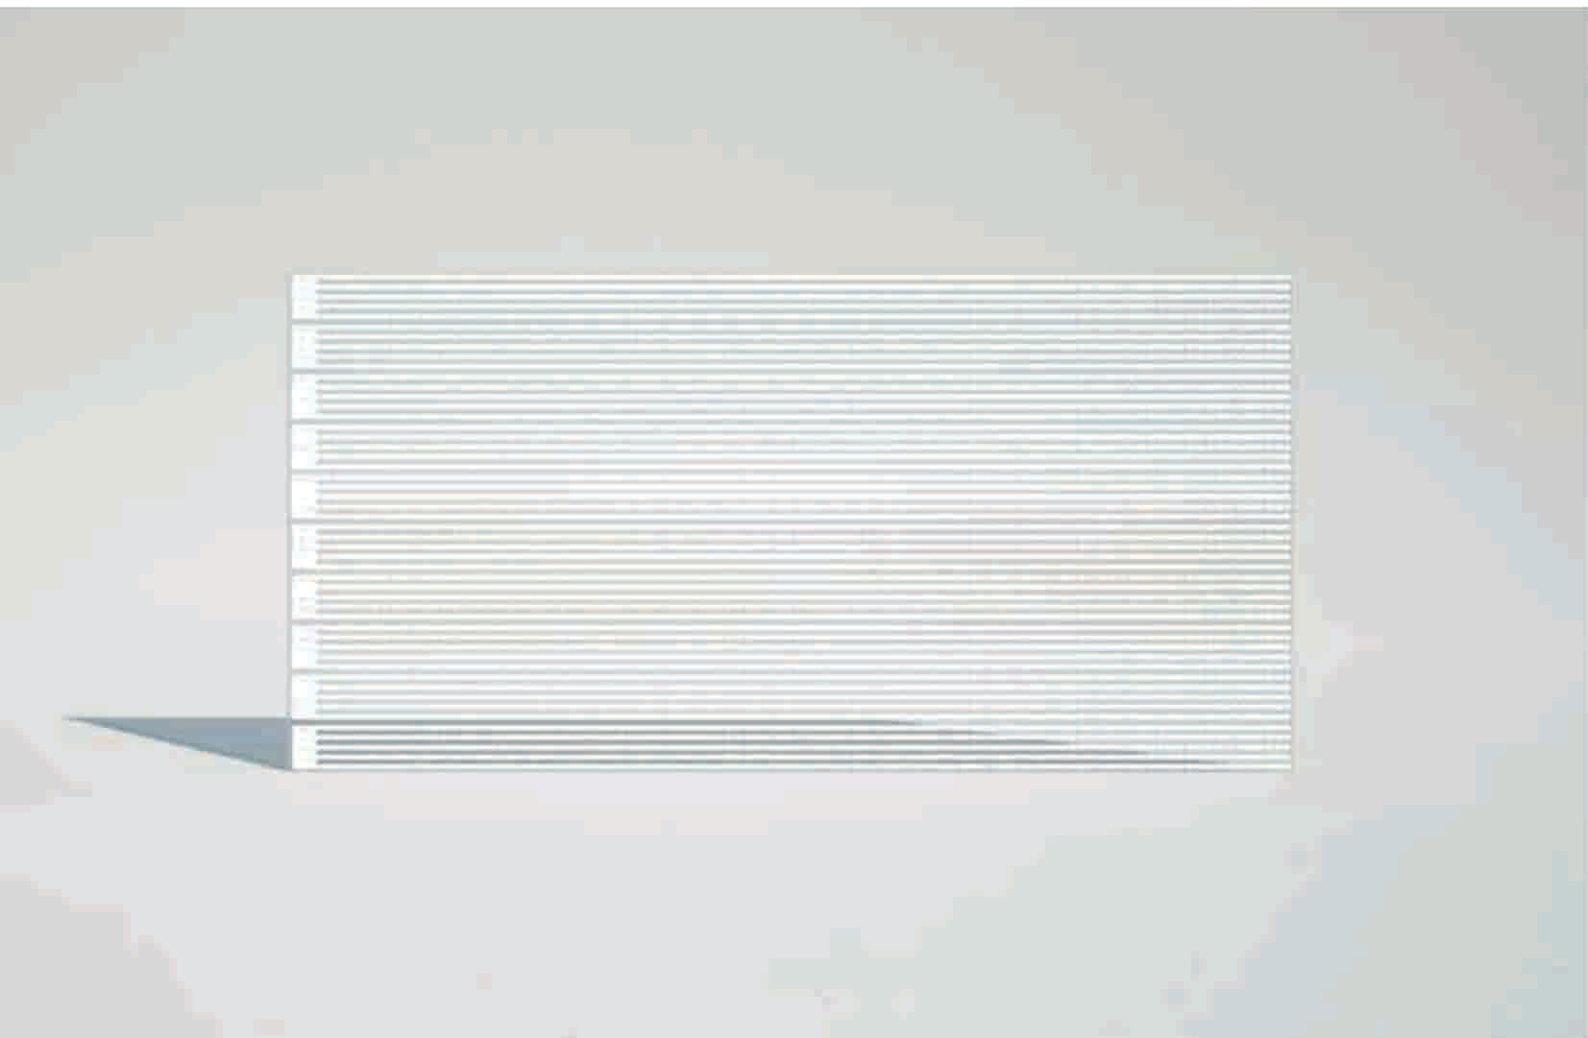

- 通透率可达80%
Max 80% Transparency
- 抗摔防撞
Anti-Fall And
Anti-Collision
- 隐形边框设计
Invisible Border
- 柔韧，可弯曲
Flexible, Bendable
- 安装方便
Easy Installation

案例 Case

LED透明贴膜屏 Transparent Film LED Display



LED透明光电屏 Transparent Glass LED Display



LED透明晶膜屏 Transparent Crystal LED Display



产品参数 (Product Specification)

像素间距 (Pixel Pitch)	6mm	10mm	20mm	20-40mm
模组尺寸 (Module Size)	960x384/768x384mm	1000x500mm	960x320mm	1000x400mm
模组分辨率 (Module Resolution)	160X64/128x64 Pixels	100X50 Pixels	48X16 Pixels	50X10 Pixels
像素密度 (Pixel Density)	27777 Pixels/m ²	10000 Pixels/m ²	2500 Pixels/m ²	1250 Pixels/m ²
通透率 (Transparency)	50%	68%	85%	92%
显示亮度 (Brightness)	≤3500 nits	≤3500 nits	≤4500 nits	≤3500 nits
最佳视距 (Best sight Distance)	≥6m	≥10m	≥20m	≥20m
观看视角 (Viewing Angle)	≥160°			
刷新率 (Refresh Rate)	1920Hz~3840Hz			
输入电压 (Input Voltage)	AC100~220V			

Meiyad®

美 亚 迪

创意定制显示屏

Customized Creative LED Display

创意画布屏

Creative Canvas Display

像素间距 (Pixel Pitch)	4mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	62500 Pixles/m ²



创意聚宝盆屏

Creative Cornucopia Display

像素间距 (Pixel Pitch)	2.5mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	160000 Pixles/m ²



创意10字屏

Creative 10 Shape Display Product

像素间距 (Pixel Pitch)	1.8mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	308641 Pixles/m ²



深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

Meiyad®

美 亚 迪

艺术显示之美

Beauty Of Artistical LED Display

臻彩美亚迪 · 不负好创意

— Make Your Dreams come true —

创意球形屏

Spherical LED Display

像素间距 (Pixel Pitch)	1.8mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	308641 Pixles/m ²



创意魔方屏

Cube LED Display

像素间距 (Pixel Pitch)	3.91mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	65636 Pixles/m ²



创意字母屏

Creative Letter Display

像素间距 (Pixel Pitch)	5mm
灰度等级 (Gray Scale)	≥12Bit
像素密度 (Pixel Density)	40000 Pixles/m ²



Meiyad®

美 亞 迪

XR 虚拟影棚

XR Virtual Studio LED Display



独家首创弧形主屏
An Original Pioneer Of Main Curve LED Screen



垫脚安装
Bottom Support
Installation



性能稳定
Stable Performance



耐磨, 抗UV
Wear-resistant
UV-resistant



坚固, 承重高
Sturdy, High
load-Bearing



平整度高, 无缝拼接
High Flatness,
Seamless Splicing


深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋

案例 Case

◆ 独家首创弧形主屏 An Original Pioneer of Main Curve LED screen

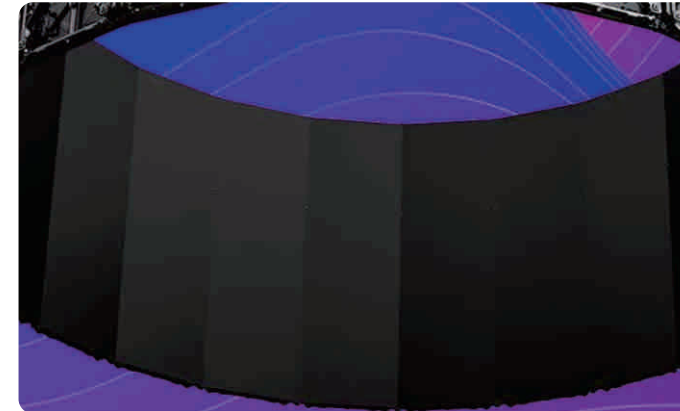

A-常规租赁屏带弧度锁方案

A-常规弧度锁租赁屏:

优势: 屏幕任意拼装弧度可以根据需求拼装, 后期可任意改动。(适合临时需求搭建)

劣势: 拼接缝隙大, 块装明显, 容易产生亮暗线(弧面多边形构成, 影响画面显示, 观看效果不佳)



B-柔性订制模组, 订制弧形租赁箱方案

B-柔性订制模组, 弧形订制租赁箱:

优势: 完美解决拼缝, 亮, 暗线等问题(弧面线性, 显示画面完美, 观看效果佳)

劣势: 屏幕造型固定弧度订制后期不能改动(适合长期使用固定影棚搭建)



色彩随心变幻



显示效果预设

产品参数 (Product Specification)


像素间距 (Pixel Pitch)	2.6mm	2.97mm	3.91mm	4.81mm
模组尺寸 (Module Size)	250x250mm	250x250mm	250*250mm	250*250mm
模组分辨率 (Module Resolution)	96x96 Pixels	84x84 Pixels	64x64 Pixels	52x52 Pixels
像素密度 (Pixel Density)	147456 Pixels/m²	112896 Pixels/m²	65536 Pixels/m²	43264 Pixels/m²
灯珠型号 (LED Configuration)	SMD 1415	SMD 1415	SMD 1921	SMD 1921
显示亮度 (Brightness)	≥1500 nits		≥4500 nits	
刷新率 (Refresh Rate)	1920Hz~3840Hz			
箱体尺寸 (Working Voltage)	500*500mm / 500*1000mm			
观看视角 (Viewing Angle)	120°/120°			




美 亞 迪

单色模组系列

Single color LED Display Module Series

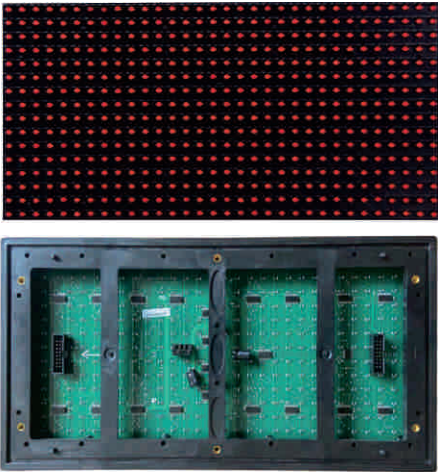

室外单色模组 (Outdoor single color DIP LED display module series)						
颜色 (Color)	Red	Green	Yellow	Blue	White	RG
像素配置 (Pixel Configuration)	1R	1G	1Y	1B	1W	1R1G
亮度 (Brightness/nits)	1500	3500	1300	1800	8000	5500
型号 (Model)	P10					
点间距(Pixel Pitch)	10mm					
模组像素点 (Module Pixel)	32*16					
模组尺寸 (Module Size/W*H mm)	320*160					
灯珠型号 (LED Configuration)	DIP546					
扫描方式 (Scan Mode)	1/4					

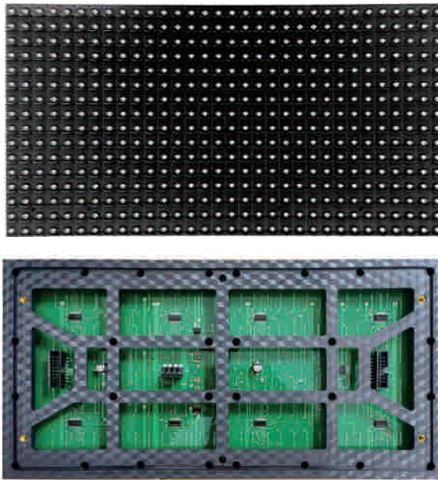

室外单色模组 (Outdoor Single Color SMD LED Display Module series)						
颜色 (Color)	Red	Green	Yellow	Blue	White	RGB
亮度 (Brightness /nits)	800	1000	2000	500	2000	1800/2800
型号 (Model)	P10					P10
间距点 (Pixel Pitch)	10mm					10mm
模组像素点 (Module Pixel)	32*16					32*16
模组尺寸 (Module Size/W*H mm)	320*160					320*160
灯珠型号 (LED Configuration)	SMD2835					SMD2727
扫描方式 (Scan Mode)	1/4					1/4 or 1/8




美 亞 迪

全彩模组系列

Full color LED Display Module Series



室外全彩模组 (Outdoor Full Color SMD LED Display Module series)								
型号 (Model)	P2.5	P3	P3.076	P4	P5	P6	P8	P10
模组像素点(Module Pixel)	128*64	64*64	104*52	80*40	64*32	32*32	40*20	32*16
模组尺寸 (Module Size/W*H mm)	320*160	192*192	320*160	320*160	320*160	192*192	320*160	320*160
灯珠型号 (LED Configuration)	SMD1415	SMD1921	SMD1921	SMD1921	SMD1921/2727	SMD2727	SMD2727/3535	SMD3535
扫描方式 (Scan Mode)	1/16	1/16	1/13	1/10	1/8	1/8	1/5	1/2 OR 1/4
亮度 (Brightness)	≥4500 nits							

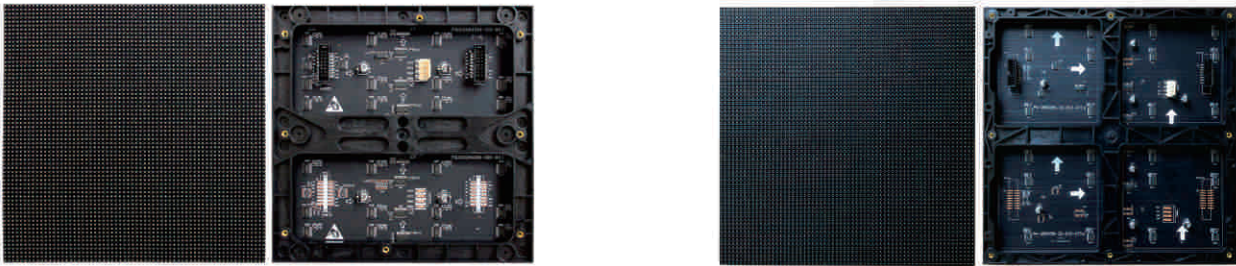

室内全彩模组 (Indoor Full Color SMD LED Display Module series)								
型号 (Model)	P1.25	P1.538	P1.86	P2	P2.5	P3	P4	P5
模组像素点 (Module Pixel)	256*128	208*104	172*86	160*80	128*64	64*64	64*64 80*40	64*32
模组尺寸 (Module Size/W*H mm)	320*160	320*160	320*160	320*160	320*160	192*192	256*256 320*160	320*160
灯珠型号 (LED Configuration)	SMD1010	SMD1212	SMD1515	SMD1515	SMD2121	SMD2121	SMD2121	SMD2121
扫描方式 (Scan Mode)	1/64	1/52	1/43	1/40	1/32	1/32	1/32 or 1/20	1 /16
亮度 (Brightness)	≥600 nits							

深圳市美亚迪光电有限公司
Shenzhen Meiyad Optoelectronics Co., Ltd



全球销售服务热线: +86 18566238999
座机: +86-755-82687591 传真: +86-755-82687591
网址: www.mydled.com 邮箱: sales@mydled.com
地址: 深圳市宝安区石岩街道塘头南岗第三工业区9栋