




SOLIDS CONTROL

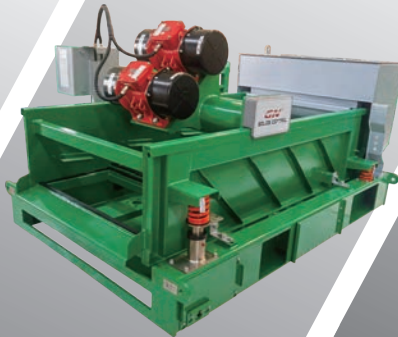

**SOLIDS CONTROL &
WASTE MANAGEMENT**

Hebei GN Solids Control Co.,Ltd

Content

Part 1: Company Profile	3
Part 2: Decanter Centrifuge.....	10
Part 3: Shaker Screen	19
Part 4: Solids Control Equipment	25
4.1 Shale Shaker	25
4.2 Desander & Desilter	29
4.3 Degasser	32
4.4 Mud Agitator & Mud Gun.....	35
4.5 Mud Mixing Hopper	36
4.6 Mud Tank	37
Part 5: Waste Management Equipment	38
5.1 Vertical Cuttings Dryer	38
5.2 High G Drying Shaker	39
5.3 Screw Conveyor	40
5.4 Inclined Plate Clarifier	41
5.5 Chemical Dosing Equipment.....	42
Part 6: Transfer Pumps	43
6.1 Centrifugal Pump	43
6.2 Shear Pump	44
6.3 Screw Pump	45
6.4 Submersible Slurry Pump	46
6.5 Vacuum Pump	47
Part 7: Application	48
7.1 Oil Gas Drilling Solids Control.....	48
7.2 Drilling Waste Management	49
7.3 Oil Sludge Treatment	51
7.4 HDD Mud Recycling	52
7.5 TBM & Bored Piling Mud Cleaning.....	53
7.6 Industry Solids & Liquid Separation.....	54

Part 1: **Company Profile**

1.1 Company Introduction

Hebei GN Solids Control Co., Ltd (GN Solids Control) is a professional solids control equipment manufacturer, mainly producing drilling solids control equipment, drilling waste treating equipment, decanter centrifuge, shale shaker and screen, as well as drilling mud treatment system. GN Solids Control is a National High-Tech Enterprise, with a sound management system, GN Solids Control has been awarded the American API Quality Management System Certification for 12 consecutive years since 2010, and has the China Classification Society ISO9001, ISO14001, ISO45001 management system certifications for many consecutive years. GN Solids Control equipment is certified by EU CE, Russian EAC, and International IECEx. GN Solids Control adopts an ERP Cloud + CRM Cloud management system for production and operation, achieving digital management of production process control and quality traceability. About 70% of GN Solids Control products are exported to the international market and have been sold to 70+ countries and regions globally, including the United States, Canada, Australia, the Middle East, Russia, Europe, Southeast Asia, South America, Africa, and other regions. And established branches in the United States and Russia.



1.2 GN Solids Control Strength



Rich Technical Experience :

GN Solids Control has **over 15 years** of experience in the research and development, and manufacturing of solids control equipment since 2007. GN is a National High-Tech enterprise and also a provincial-level specialized and innovative enterprise.



Strong Manufacturing Strength :

With **total 110,000 square meters**, GN Solids Control's three major manufacturing plants have many advanced processing equipment such as Automatic Welding Robot Workstations, Large Laser Cutting Machines, Imported CNC Machining Centers, and Large Automatic Injection Molding Machines.



Sound Management System :

GN Solids Control has been awarded the certification of ISO9001, ISO14001, ISO45001, and the American API Q1 Quality Management System. GN Solids Control products have obtained EU CE and Russian EAC product certifications. GN adopts **ERP Cloud+CRM Cloud** management system.



Wide market coverage :

Exported to **over 70 countries and regions** around the world, and have gained widespread recognition from domestic and foreign customers. Branches have been established in Houston, USA and Moscow, Russia.

1.3 GN Solids Control Plants

1

GN No. 1 Factory



2

GN No. 2 Factory



3

GN No. 3 Factory



1.4 GN USA Facility


GN Solids America is a branch company of GN Solids Control China. GN Solids America is located in Houston, Texas. With our professional team and workshop and warehouse in Houston, TX, we can offer better service to the North and South American customers. In our Houston office, we have employees speaking Chinese, English and Spanish which help us to communicate with customers more smoothly.



1.5 GN Factory



CNC Machines



Material Cutting and Welding Machines






Sand Blasting and Plastic Injection Machine

1.6 GN Certificates

- ISO9001 Quality Management Certificate
- ISO14001 Environment Management Certificate
- ISO45001 HSE Certificate
- America API Q1 Certificate
- Russia EAC Certificate
- Europe CE Certificate
- China Explosion Proof Certificate
- International IECEx certificate
- Europe ATEX certificate
- National High Tech Certificate



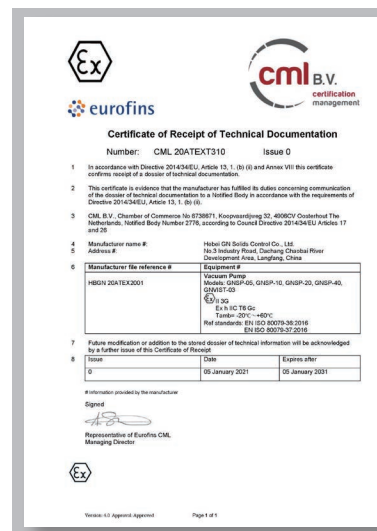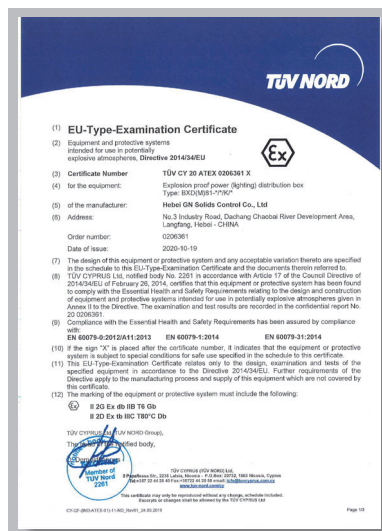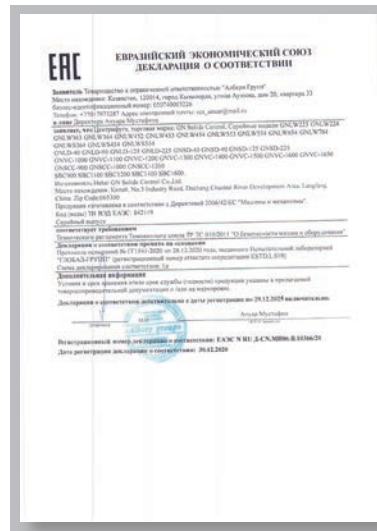

Part 2: Decanter Centrifuge

2.1 GN Industry Decanter Centrifuge

GN designs and manufactures different sizes of decanter centrifuges for industry separation. Solid bowl decanter centrifuges have been operating according to the same basic principle since the 19th Century. GN centrifuge production line is from 9inch (220mm) bowl to 30inch (760mm) bowl, with bowl length and diameter ratio up to 4.2, and the adjustable G force is up to 3000G to meet different industries' separation applications.

GN design specific centrifuges according to specific separation tasks and the use of resilient, high-quality materials have improved the performance of the centrifuges.

Moreover, GN owns a branch for design PLC and electrical control system; this gives GN advantages in electrical components for measuring and control technology. The performance and availability of the decanter centrifuges or three-phase centrifuges are significantly improved by the control system.




Main Function of GN Industry Centrifuges

- Dewatering sludge / mud and suspensions
- Thickening sludge or mud
- Clarifying different type liquids
- Separating 3-phase mixtures, i.e. two immiscible fluid phases and a solid phase
- Classifying solids in a wet suspension by grain size
- Separation of solids according to various densities

GN Centrifuge Main Application Industry

- Oil Gas Drilling Mud Solids Control
- Drilling Waste Management
- Oil Sludge Treatment
- HDD trenchless mud cleaning
- Bored Pile and TBM mud dewatering
- Waste water treatment
- Chemical and Pharmaceutical separation
- Mining industry separation
- Food and Beverage industry separation

2.2 GN Centrifuge Features

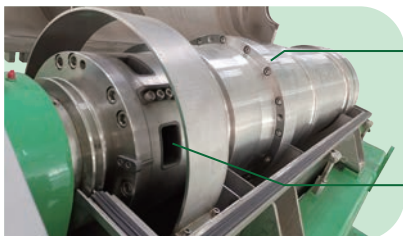


The bowl of GN centrifuge is made from Duplex Stainless Steel SS2205 or SS2304 by centrifugal casting which is better than SS304 or SS316.

The solids discharge port is made from Tungsten carbide inserts, the anti-abrasion will extend the life.



Flexible pond depth adjustment for different material separation.

The air-operated spring for assisting open of the cover with safety locking system.

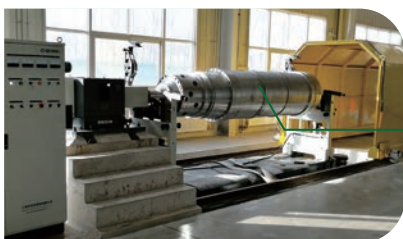


3 Stage balancing process to maximize the balance of the centrifuge include 1800RPM low speed balancing and real operation high speed balancing as well as the assembly balancing.



The Screw is protected by interchangeable Tungsten Carbide Tiles for longer life and easy maintenance

The mud distribution port is made from Tungsten carbide inserts, the anti-abrasion will extend the life for heavy mud.

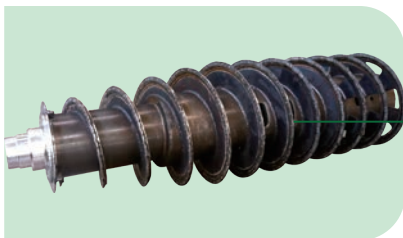

The screw is made from stainless steel with heat treatment, and the opening impeller will improve the centrifuge capacity. Single Lead or double lead screw is optional



Two motors in one side to give more space for the operator to do maintenance.

The bearings are premium SKF bearings for reliable and longer operation. The automatically lubrication system is available for option.

2.3 GN Centrifuge VFD Control Panel


For the oil gas industry and mining industry, most of the time, the client need to use Explosion proof VFD control panel for hazardous area. GN Developed the pressurized explosion proof VFD control panel to meet the IEC Ex, ATEX, and CNEX zone 1 and zone 2 applications.



- 3 VFD for bowl speed, differential speed, and pump capacity.
- The VFD brand is ABB or YASKAWA



- The positive pressurized VFD panel can be cooling by vertex tube or air conditioner to work for ambient Temp. up to +55 C degree.
- The VFD panel is optional for IEC Ex or ATEX or CNEX zone 1 or Zone 2 application.

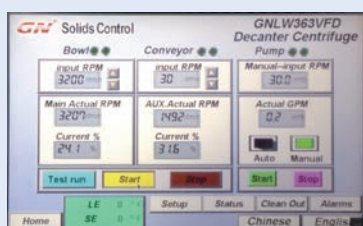

- The HMI and PLC system for user-friendly operation and smart control and protection.
- It's optional for client to choose bearing temperature protection, vibration switch.


2.4 Fully Hydraulic Drive Centrifuge

GN Solids Control is a leading decanter centrifuge manufacturer. And Viscotherm and ROTODIFF® from Switzerland are leading brand for centrifuge hydraulic driving system. GN and Viscotherm have been jointly working together to develop the Full hydraulic drive centrifuge for international clients to meet the highest standard.

The advantage of the FHD centrifuge is for using in high temperature ambient for heavy mud with flexible bowl and differential speed. The compact one skid design makes it easier to rig up.



The full hydraulic system consists of A the Hydraulic Pump Unit, B the Bowl drive hydraulic motor, and C the Scroll drive (Rotodiff). The hydraulic pump unit A feeds hydraulic oil to the scroll drive C and the bowl drive B by means of two separate and individually independent operating circuits. An electric motor A1 drives the combined pumps A2 and A3. Each operating circuit is equipped with its own hydraulic pump and its own controls. The pump unit contains all setting devices and safety valves, as well as pressure gauges. With this system, the bowl's rotational speed as well as the scroll's differential speed may be manually adjusted independently from one another, continuously and infinitely variable during the centrifuge's operation.

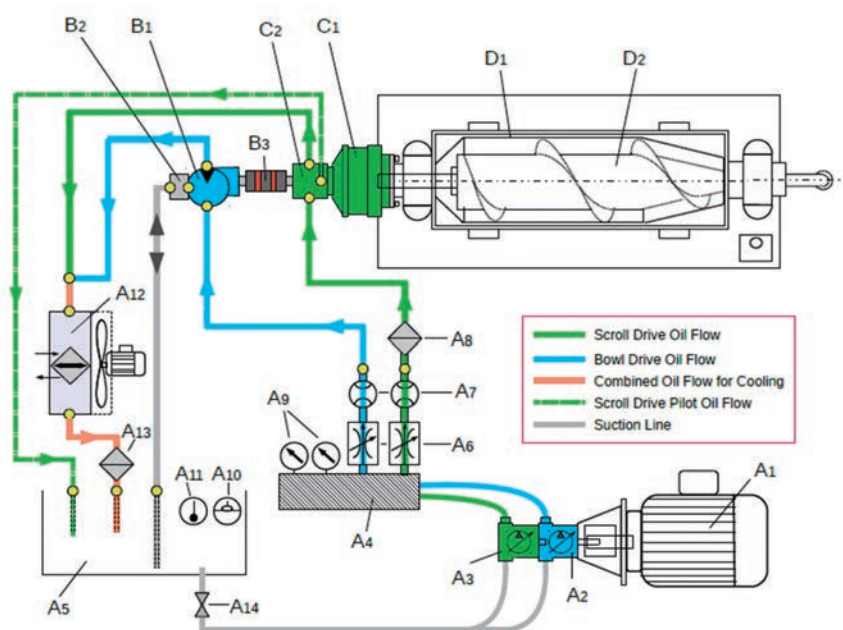

A Hydraulic Pump Unit :

- A1 EEx Electric Motor
- A2 Variable Displacement Hydraulic Piston Pump, Bowl Drive
- A3 Variable Displacement Hydraulic Piston Pump, Scroll Drive
- A4 Controls A5 Oil Tank A7 Flow Meters
- A6 Variable Scroll Speed, Variable Bowl Speed
- A8 High Pressure Oil Filter
- A9 Pressure Gauges
- A10 Oil Level Gauge A11 Oil Temperature Gauge
- A12 Oil-Air Cooler A13 Return Line Oil Filter
- A14 Shut Off Valve

B Bowl Drive:

- B1 High Speed Hydraulic Piston Motor
- B2 Anti Cavitation Device
- B3 Semi-Flexible Coupling

C Scroll Drive:

- C1 Rotodiff Hydraulic Motor
- C2 Connection Block

D Centrifuge:

- D1 Centrifuge Bowl
- D2 Centrifuge Scroll

2.5 9 inch (220mm) Decanter Centrifuge

The 9 Inch Decanter Centrifuge is a baby centrifuge which is the one of the world smallest industry decanters. The bowl of the centrifuge is 9 inch (220mm). As the compact design, it is popular for client to use it in small capacity or limited space application for solids and liquid separation. It is also considered to be the best choice for experiment testing with decanter centrifuge. GN 9 inch decanter centrifuge is optional in three types includes: fixed gear box drive, fully hydraulic drive, and variable frequency drive.



Model	GNLW223D	GNLW224FT-VFD
Max Capacity	130 l/min	130 l/min
Effective Capacity	100 l/min	100 l/min
Bowl Diameter	9inch(220mm)	9inch(220mm)
Bowl Length	26.4inch(670mm)	36.4inch(924mm)
Max Bowl Speed	4500RPM	5054RPM
Typical Bowl Speed	3800RPM	0-4500RPM
Max G Force	2492G	3200G
Typical G Force	1777G	2492G
Main Motor	11KW(15HP)	11KW(15HP)
Pump Size	N/A	5.5KW(7.5HP)
Gearbox Torch(N · M)	500N · M	1400N · M

2.6 14inch (360mm) Decanter Centrifuge

GN 14inch (360mm)decanter centrifuge is the most popular centrifuge for oil gas industry, it is popular for drilling mud treatment, and also it can be used for industry waste water treatment, oil sludge treatment, mining water treatment, chemical industry separation.GN 14 inch decanter centrifuge is optional in three types includes: fixed gear box drive, fully hydraulic drive, and variable frequency drive.




Model	GNLW363D	GNLW363D-VFD	GNLW363D-FHD	GNLW364FT-VFD
Dive Mode	Fixed Speed	VFD	FHD	VFD
Bowl Diameter	14inch(360mm)	14inch(360mm)	14inch(360mm)	14inch(360mm)
Bowl Length	50inch(1271mm)	50inch(1271mm)	50inch(1271mm)	59.5inch(1512mm)
Designed Capacity	200GPM(45m ³ /h)	200GPM(45m ³ /h)	200GPM(45m ³ /h)	242GPM(55m ³ /h)
Typical Capacity	132GPM(30m ³ /h)	132GPM(30m ³ /h)	132GPM(30m ³ /h)	154GPM(35m ³ /h)
Max Bowl Speed	3900RPM	3900RPM	3900RPM	3964RPM
Typical Bowl Speed	3200RPM	0~3200RPM	0~3200RPM	0~3200RPM
Max G Force	3063G	3063G	3063G	3200G
Typical G Force	2062G	0~2062G	0~2062G	0~2062G
Cut Point	2~5μm	2~5μm	2~5μm	2~5μm
Differential Speed	38RPM	0~45RPM	0~65RPM	0~65RPM
Gearbox Torch	3500 N·M	3500 N·M	3717 N·M	3500 N·M
Gearbox Ratio	57:1	57:1	Hydraulic Gearbox	57:1
Main Motor	37KW(50HP)	37KW(50HP)	45KW(60HP)	37KW(50HP)
Back Drive Motor	11KW(15HP)	11KW(15HP)	N/A	11KW(15HP)
Recommend Pump Motor	7.5KW(11HP)	7.5KW(11HP)	7.5KW(11HP)	7.5KW(11HP)
Remarks	Above Max capacity is for water, the treating capacity would be various as per different material conditions and customer required treating results.			

2.7 18inch (450mm) Decanter Centrifuge

GN 18inch(450mm) decanter centrifuge is optional with 3 different bowl length. GNLW452 is an economic centrifuge, popular for drilling mud treatment. To meet different applications, the GNLW453 and GNLW454 is designed with longer bowl.

GN 18 inch decanter centrifuge is optional in three types includes: fixed gear box drive, fully hydraulic drive, and variable frequency drive.

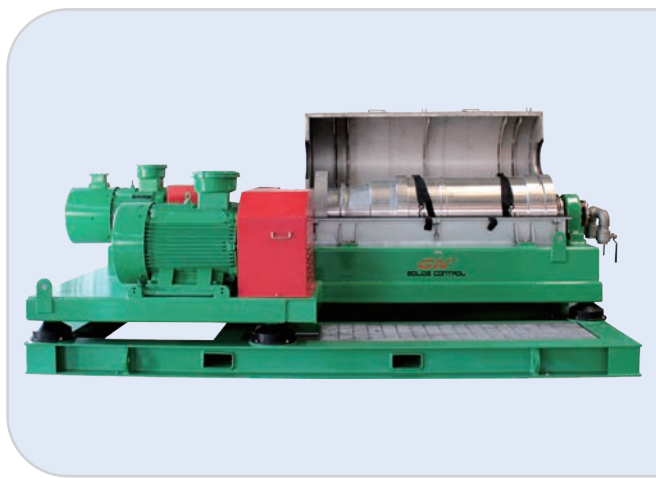

Model	GNLW452D	GNLW453D-VFD	GNLW454FT-VFD
Bowl Diameter	18inch(450mm)	18inch(450mm)	18inch(450mm)
Bowl Length	43.5inch(1105mm)	61inch(1540mm)	74.5inch(1890mm)
Designed Capacity	250GPM(57M ³ /h)	352GPM(80m ³ /h)	400GPM(90m ³ /h)
Typical Capacity	176GPM(40m ³ /h)	264GPM(60m ³ /h)	300GPM(68m ³ /h)
Max Bowl Speed	1800RPM	3200RPM	3437RPM
Typical Bowl Speed	1800RPM	0~2800RPM	0~3200RPM
Max G Force	815G	2578G	3000G
Typical G Force	815G	0~1973G	0~2578G
Cut Point	5-7μm	2~5μm	2~5μm
Differential Speed	32RPM	0~45RPM	0~45RPM
Gearbox Torch	3500 N·M	7500 N·M	7500 N·M
Gearbox Ratio	57:1	35:1	35:1
Main Motor	45KW(60HP)	55KW(75HP)	55KW(75HP)
Back Drive Motor	N/A	22KW(30HP)	22KW(30HP)
Recommend Pump Motor	11KW(15HP)	15KW(20HP)	15KW(30HP)
Remarks	Above Max capacity is for water, the treating capacity would be various as per different material conditions and customer required treating results.		

2.8 22inch(550mm) Decanter Centrifuge

GN 22inch(550mm) decanter centrifuge is widely used for different industries .It is the medium size centrifuge which has the normal capacity requirement for most of the applications. It is popular for drilling mud treatment, and also it can be used for industry waste water treatment, oil sludge treatment, mining water treatment, chemical industry and food industry separation.



Model	GNLW553D-VFD	GNLW554FT-VFD
Bowl Diameter	22inch(550mm)	22inch(550mm)
Bowl Length	71inch(1800mm)	91inch(2310mm)
Designed Capacity	500GPM(114m ³ /h)	600GPM(136m ³ /h)
Typical Capacity	400GPM(90m ³ /h)	480GPM(108m ³ /h)
Max Bowl Speed	3000RPM	3112RPM
Typical Bowl Speed	0-2500RPM	0~2800RPM
Max G Force	2719G	3000G
Typical G Force	0~1888G	0~2412G
Cut Point	2-5μm	2~5μm
Differential Speed	0~45RPM	0~45RPM
Gearbox Torch	12000 N·M	12000 N·M
Gearbox Ratio	35:1	35:1
Main Motor	90KW(120HP)	90KW(120HP)
Back Drive Motor	37KW(50HP)	45KW(60HP)
Remarks	Above Max capacity is for water, the treating capacity would be various as per different material conditions and customer required treating results.	

2.9 30inch(760mm) Decanter Centrifuge

The GN 30 inch (760mm) bowl diameter decenter centrifuge is a big bowl centrifuge. With the bowl length and diameter ratio at 4.4:1, GN 30inch centrifuge can handle big volume fluids with one single unit. GN 30 inch decenter centrifuge is designed for best performance in Tunnel Boring Project Mud Cleaning, Dredging Slurry Separation, and Municipal Sewage Sludge in Purification Plants, Industry Waste Water Treatment. The tungsten carbide protection in the slurry distribution port or solids discharge port as well as the screw conveyor inside the bowl guarantee the GN 30 inch decenter centrifuge last longer.



Model	GNLW764A-VFD
Bowl Diameter	760mm
Bowl Length	3328mm
Designed Capacity	528GPM/120m ³ /h (Mud with 20% Solids Content)
Max Bowl Speed	2605RPM
Typical Bowl Speed	0-2200RPM
Max G Force	2900G
Typical G Force	0~2060G
Cut Point	2-5μm
Differential Speed	5~28RPM
Gearbox Torch	25000 N·M
Gearbox Ratio	38:1
Main Motor	160KW(217HP)
Back Drive Motor	90KW(120HP)
Remarks	Above Max capacity is for reference only, the treating capacity would be various as per different material conditions and customer required treating results.

Part 3: Shale Shaker Screen

3.1 GN Shaker Screen Factory

GN Solids Control is an international brand for solids control equipment and shaker screens with location in China, USA and Russia. GN Solids has advanced screen production and processing equipment, including welding robot, CNC punch machine, automatic injection molding machine, CNC heat-press, automatic glue machine, etc. GN Solids Control manufactures top quality replacement shaker screens according to API RP 13C standard for GN shakers and all other major brand shakers for the drilling industry.



GN Solids China



GN Solids America



GN Shaker Screen Factory



Frame Fabrication Machine



Shaker Screen Manufacture Machine



Screen Packed for Delivery

3.2 API RP13C Shaker Screen

GN Shaker Screen has been tested by third party lab according to API RP 13C standard(ISO13501). GN production quality management system has passed the API Q1 and ISO 9001. GN is one of the few companies provide high quality international standard shaker screens in the market.


3.2.1 API RP 13 Third Party Test Data

TABLE 1
API RP 13C SHAKER SCREEN TEST RESULTS

		API Screen	D100	Screen Conductance	Estimated Non-Blanked Area
Label	LIMS	Designation	(microns)	(Kd/mm)	(m ²)
GLA020	237505	20	809.12	10.88	0.56
GLA035	240158	35	538.61	9.69	NT
GLA040	239462	40	438.52	8.64	NT
GLA050	237507	50	284.57	5.17	NT
GRA060	237508	60	268.12	4.10	NT
GRA070	240155	70	202.63	3.33	NT
GRA080	241746	80	193.15	2.76	NT
GRA100	237511	100	164.81	2.66	0.51
GRA120	241747	120	134.35	1.89	NT
GRA140	237513	140	101.20	1.89	NT
GRA170	237514	170	82.80	1.34	NT
GRA200	237515	200	73.49	1.32	NT
GRA230	240156	230	68.89	0.71	NT
GRA270	240157	270	57.70	0.67	NT

You can contact GN sales person to get detail test report.

3.2.2 API Q1 and ISO9001 Certificate.

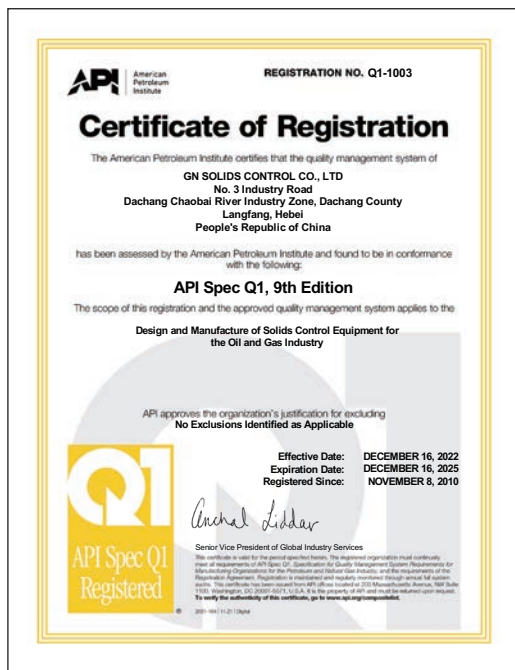

3.3 ASTM Mesh and API Cut Point

ASTM Mesh and Cut Point	
D100 Cut Point	ASTM Single Mesh
2000 microns	ASTM 10 Mesh
1000 microns	ASTM 18 Mesh
850 microns	ASTM 20 Mesh
710 microns	ASTM 25 Mesh
600 microns	ASTM 30 Mesh
500 microns	ASTM 35 Mesh
425 microns	ASTM 40 Mesh
355 microns	ASTM 45 Mesh
300 microns	ASTM 50 Mesh
250 microns	ASTM 60 Mesh
212 microns	ASTM 70 Mesh
180 microns	ASTM 80 Mesh
150 microns	ASTM 100 Mesh
125 microns	ASTM 120 Mesh
106 microns	ASTM 140 Mesh
90 microns	ASTM 170 Mesh
75 microns	ASTM 200 Mesh
63 microns	ASTM 230 Mesh
53 microns	ASTM 270 Mesh
45 microns	ASTM 325 Mesh
38 microns	ASTM 400 Mesh

API No. and Cut Point Table	
D100 Cut Point	API No.
> 1850.0 TO 2180.0	API 10
> 780.0 TO 925.0	API 20
> 462.5 TO 550.0	API 35
> 390.0 TO 462.5	API 40
> 275.0 TO 327.5	API 50
> 231.0 TO 275.0	API 60
> 196.0 TO 231.0	API 70
> 165.0 TO 196.0	API 80
> 137.5 TO 165.0	API 100
> 116.5 TO 137.5	API 120
> 98.0 TO 116.5	API 140
> 82.5 TO 98.0	API 170
> 69.0 TO 82.5	API 200
> 58.0 TO 69.0	API 230
> 49.0 TO 58.0	API 270
> 41.5 TO 49.0	API 325
>35.0 TO 41.5	API 400



NOTE

1) ASTM is short for The American Society for Testing and Materials, ASTM E11:01 mesh equals to ISO 3310-1:2000 mesh. This method determines the cut point of single layer ASTM screen mesh size. For shaker screenmesh, normally means the surface screen mesh size. Whilst the shaker screen is usually a composition of 2 or 3 layers, the cut point of the first layer mesh is not equal to the final shaker screen cut point.

2) API is short for American Petroleum Institute, “API Number” is determined by API RP13C or ISO13501, the cut point is related to the combined 3-layer wire mesh test result. So before order, GN will need API number, or the cut point, to define a more proper shaker screen configuration.

3.4 Frame Shaker Screen

The frame shale shaker screen is a pre-tensioned screen, which is fixed on the drilling fluid shale shaker by a wedge-like compression device. According to the type of frame material, it can be divided into metal frame screen and composite frame screen. The metal frame screen is welded by metal materials, and the epoxy resin powder and the screen mesh are bonded to the frame through the plastic invasion process and the heat-pressing process. The composite frame screen is composed of metal skeleton and plastic through injection molding process, and then the screen mesh is bonded to the frame through heat-pressing process.

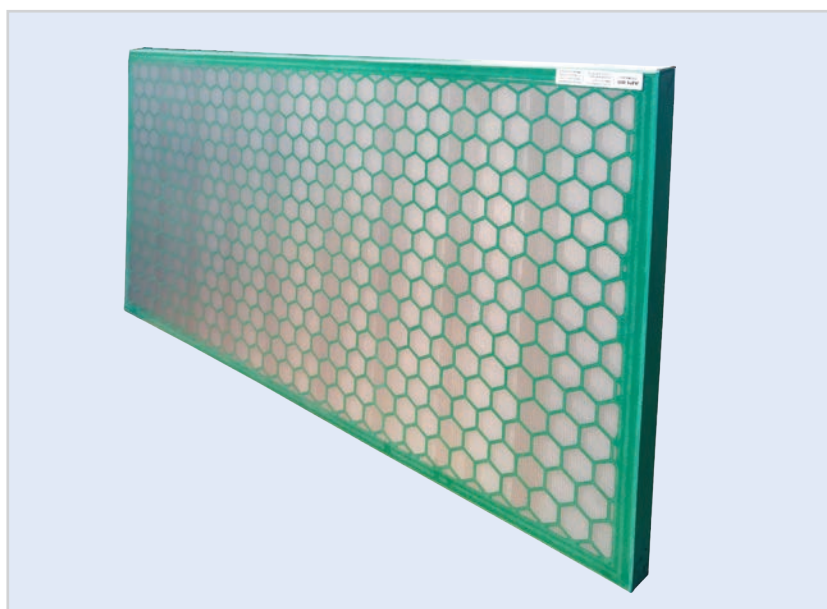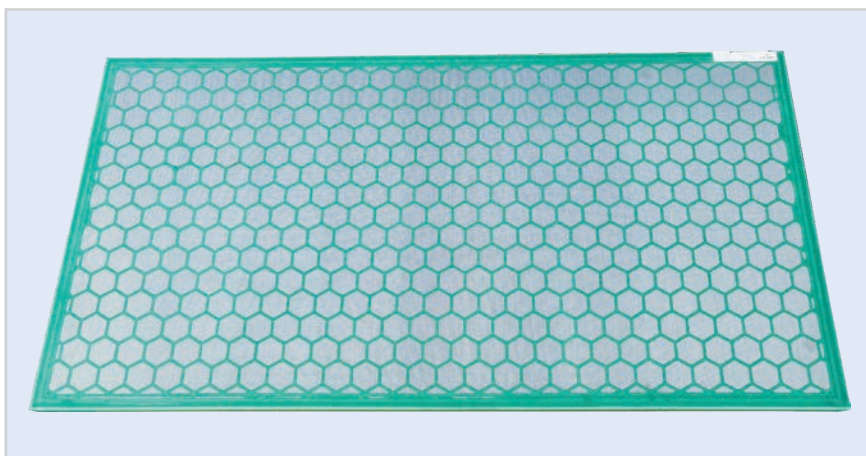


Frame shaker screen for shaker models:

- Fit for GN Shale Shaker: GNZS752, GNZS703, GNZS594, GNZS595, GNZS608 etc
- Fit for MI Swaco Shaker: Mongoose, MD-2/MD-3, BEM etc.
- Fit for NOV Brandt Shaker: Cobra, Venom, VSM-300, D380/D285P etc.
- Fit for other Shale Shaker: Fluids System 29x42, Elgin KPT and other brand shaker.

3.5 Flat Panel Hook Screen

When the flat hook shaker screen is installed on a shale shaker, the screen is hooked from the top of the screen or from the bottom of the screen by the tensioning mechanism. This type of shale shaker usually has a supporting beam to support the screen. The screen is tensioned by the joint action of the tensioning mechanism and the supporting beam. The flat hook shaker screen is usually made from a steel plate with punching holes. Then the plate is coated with plastic or epoxy resin powder, and finally the flat screen mesh is bonded to the plate by the heat-pressing process.


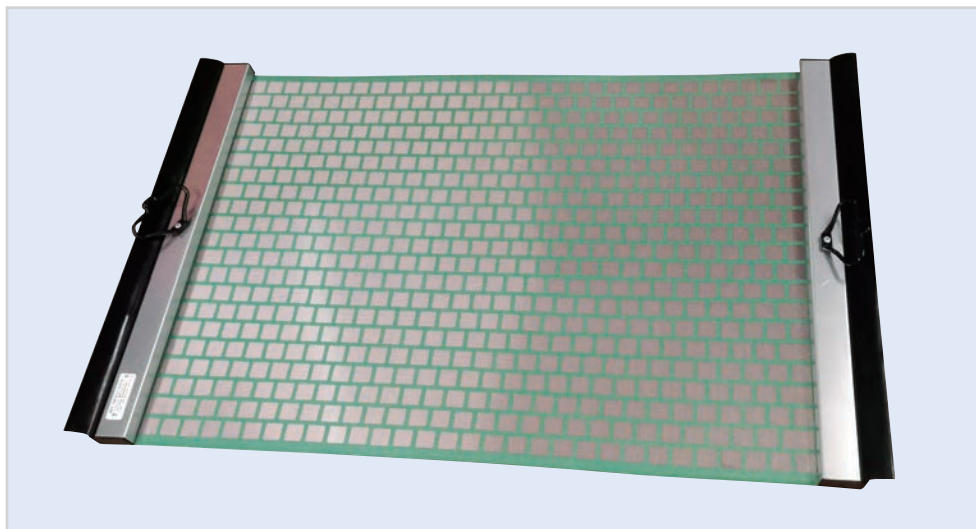


Flat Hook screen for shaker models:

- Fit for GN Shale Shaker: GNZS852, GNZS853 etc
- Fit for Derrick Shale Shaker: FLC2000, FLC500 (503/504) and others etc.
- Fit for MI Swaco Shaker: ALS
- Fit for other Shale Shaker: 700x1050mm or other customized dimension.

3.6 Corrugated Hook Screen

The installation of the wave hook shaker screen on the vibrating screen is similar to the flat hook shaker screen. The wave screen is hooked from the top of the screen or from the bottom of the screen by the tensioning mechanism. The shale shaker is usually supported by the support beam. The screen is tensioned by the joint action of the tensioning mechanism and the support beam. The wave hook shaker screen is usually made from a steel plate with punching holes. Then the plate is coated with plastic or epoxy resin powder, and finally the wave screen mesh is bonded to the plate by the heat-pressing process.

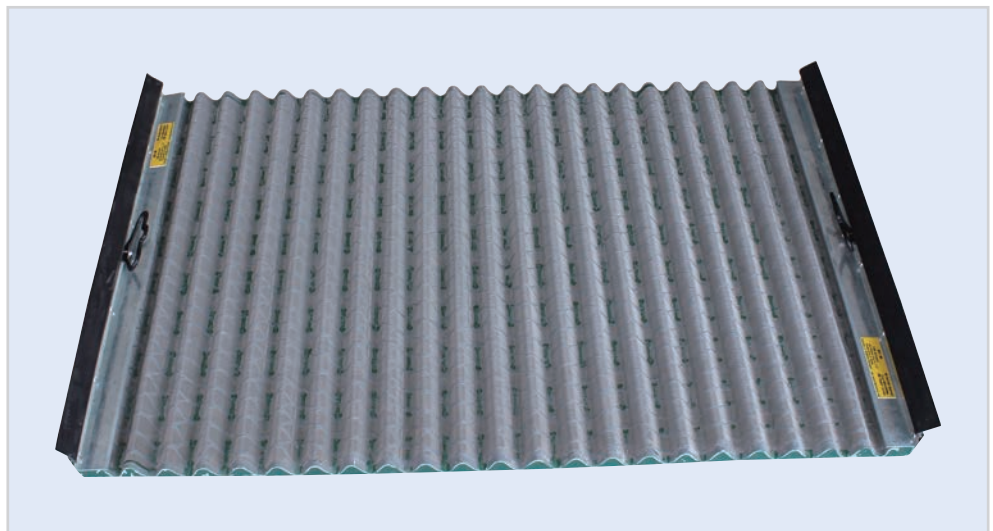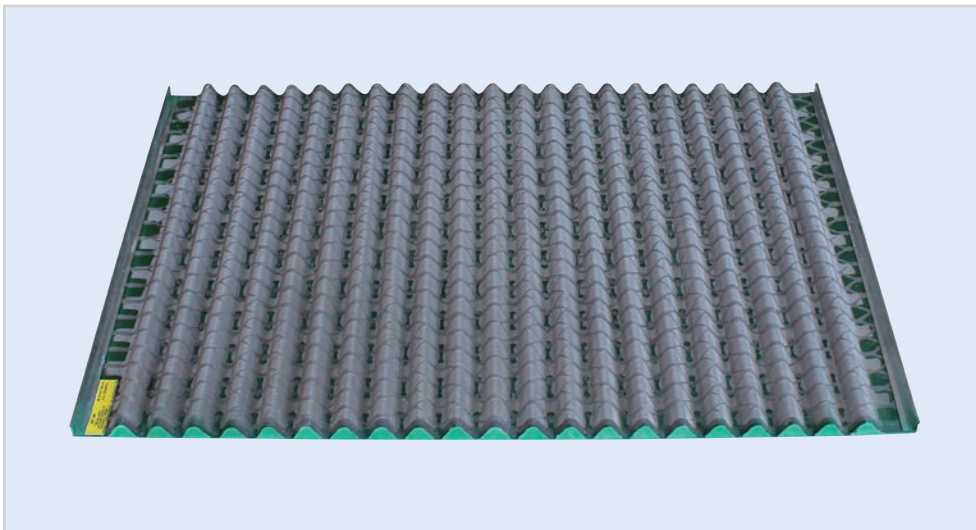

Wave Shaker screen for shaker models:

- Fit for GN Shale Shaker: GNZS852, GNZS853 etc
- Fit for Derrick Shale Shaker: FLC2000, FLC500 (503/504) and others etc.
- Fit for other Shale Shaker: 700x1050mm or other customized dimension.

Part 4: Solids Control Equipment

4.1 Shale Shaker


4.1.1 GN Shale Shaker Features



Italy OLI or US Martin Brand Vibration Motors
GN Ex Control panel with SIEMENS or Schneider Component



Pretensioned composite frame screen with Gear unit for fast screen change and longer screen life

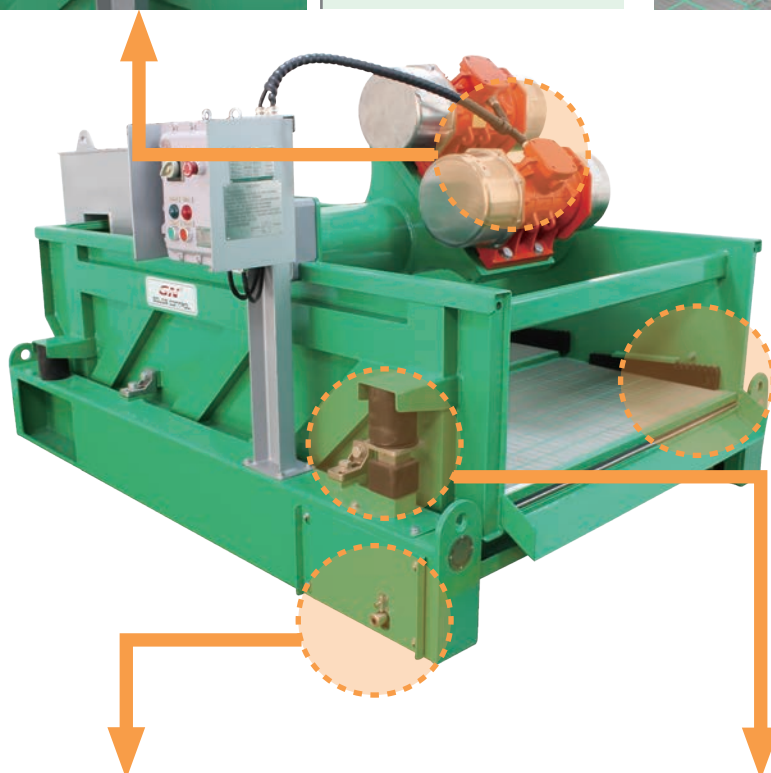

1) Heavy Duty design and heat treatment for the shaker basket to get the adjustable G force up to 8.0G.

2) Patent shaker screen seal technology for avoiding fine solids bypass and to have easy maintenance.



Mechanical Deck angle adjustment while working system to work reliably for different drilling fluids



1) User friendly shaker locking system made from stainless steel.
2) The vibration spring is covered with rubber for safety and less noise.

4.1.2 GN Shale Shaker Specs

	<p>GNZS752 series Mini shakers have been widely used in trench-less HDD, water well drilling, diamond core drilling etc., best option for compact system and low flow rate.</p>
	<p>GNZS594 series single deck shale shaker is popular in oil gas drilling, big trench-less HDD projects, or other industry separation demand.</p>
	<p>GNZS595 & GNZS706 series double deck shaker is properly designed for piling, TBM, big oil gas rig, big trench-less project, or the industry separation for multi-phase separation.</p>

Model	GNZS752J-MDZJ	GNZS594J-SHBJ	GNZS595J-SDZJ	GNZS706J-THBJ
Vibration Mode	Linear Motion			
Capacity(m³/h)	45(200GPM)	140(616GPM)	160(616GPM)	140(616GPM)
Vibration Motor(Kw)	2×1.0	2×1.72	2×1.72	2×1.94
Screen Qty(Pcs)	2	4	4	6
Screen Size	750×900	585×1165×40	585×1165×40	Up:750×900 Down:700×1250
Screen Area(m²)	1.35	2.73	2.73	Up: 2.03 Down: 2.63
Adjustable G Force	≤7.5G			≤7.3G
Vibration Amplitude(mm)	5~7			
Deck Angle	+2°	-1~+5°	-1~+5°	-1~+5°
Feeding Type	Top Box Feeder	Weir Feeder	Top	Weir Feeder
Weir Height(mm)	714	895	895	895
EX Standard	ExdIIBT4/IECEX/ATEX			
Weight(Kg)	1041	1911	1911	2145
L×W×H(mm)	1842x1670x1078	2990x2020x1437	3200*2020*1439	2749x2020x1574

4.1.3 ViST Vacuum Shaker Screen



Item	Specs	Model No.: GNVIST-03B
Supply Air Pressure	0.7-1.0Mpa (100-150PSI)	
Air capacity required	4.5 m³/min (160 CFM)	8 m³/min (280 CFM)
Operation Shaker	For 1-2 Shakers	3 Shakers
Applicable Mud	OBM,SBM,WBM	
Extra Fluids Recovery	2000-3000 L / Day (By 1 Shaker with ViST On)	
Recovery Efficiency	30%-50%	
Mud Temperature	-15 +85°C	
Suction Inlet	2 Inch (3 Sets)	
Discharge Outlet	2 Inch (1 Set)	
Air Supply Inlet	1 Inch	
Dimension (Weight)	1058x730x1068mm (350KG)	
Remarks	No Electricity, Air Operate, Adjustable Suction Time	
Weight(Kg)	929	
L×W×H(mm)	1816×1657×1083	

Features

- ViST is Vacuum Screen Technology that working with shale shaker to reduce drilling waste and recycle drilling fluids.
- ViST was pending patent design developed by GN Solids Control from June, 2017. And in May, 2018, GN tested ViST with drilling fluids, which proved to be very efficient for recycling drilling fluids.
- The ViST Pan is installed under the last screen or mounted externally. And a suction hose is connected to ViST vacuum unit. The compressed air from AC or the rig air supply is required to generate suction on the last screen panel, recover additional fluids from the cuttings. It can reduce the liquid on the cuttings by 30-50%.
- In a result, ViST maximizes the volume of recovered and reused fluids while provides dryer cuttings. Dryer cuttings mean less drilling waste and more recovery drilling fluids, so ViST can save money for operators on drilling fluids and waste management.

4.1.4 Electric Vacuum Shale Shaker



Model	GNViST-594J	GNViST-595J
Screen Qty.	4 pcs	5 pcs
Screen Area	2.72m ²	3.4m ²
Power	18.44KW	18.84KW
G Force	≤7.5G (Adjustable)	
Anti-Spraying	SS Anti-spraying unit (optional)	
Vibrate Motion	Linear / Dual Motion (optional)	
Negative Pressure	Pulse negative pressure/Continuous negative pressure (adjustable)	
Extra Drilling Mud Recovery	2000-3000L/Day (average value when the vacuum is open)	
Suitable Mud	OBM, WBM, SBM	
Ex Standard	ExdIIBt4	

Features

- The negative pressure pump unit is combined with suction hopper to generate pulse negative pressure or continuous negative pressure at the bottom of the screen during the operation of the shale shaker, achieving a combined separation effect of vibration and negative pressure.
- The pulse frequency/time of negative pressure can be controlled by an independent control system within the negative pressure pump unit. The pulse negative pressure can be also switched to continuous negative pressure according to user needs.
- Control box of the vacuum shaker is similar with the traditional shale shaker's, can independently control the shaker and work independently with the negative pressure pump. In case of maintenance of the pressure pump, the negative pressure shale shaker can be used as a regular shaker.
- Modular design also facilitates the transformation of traditional shale shaker, removing negative pressure hopper and negative pressure pump unit, matching relevant pipelines, and installing them on traditional shaker to transform them into negative pressure vacuum shaker for use.
- Stainless steel splash prevention devices, as well as dual and triple vibrating screens, can be selected according to user needs.

4.2 Desander & Desilter

4.2.1 Mud Cleaner






Model		GNZJ594J-S1S8NJ	GNZJ594J-S2S12NJ	GNZJ594J-S3S16NJ
Capacity(m ³ /h)		120(528GPM)	240(1056GPM)	360(1584GPM)
Desander Size(Inch)		10	10	10
Desander Qty(PCS)		1	2	3
Desilter Size(Inch)		4	4	4
Desilter Qty(PCS)		8	12	16
Working Pressure(Mpa)		0.25~0.4	0.25~0.4	0.25~0.4
Inlet Size (Inch)		6		
Outlet Size (Inch)		8		
Bottom Shaker Specs.	Shaker Model	GNZS594J	GNZJ594J	GNZJ594J
	Vibration Mode	Linear Motion		
	Motor(Kw)	2×1.72		
	Screen Qty(Pcs)	4	4	4
	Screen Size: (mm)	585×1165	585×1165	585×1165
	Screen Area(m2)	2.73	2.73	2.73
	Adjust G Force	≤7.5G	≤7.5G	≤7.5G
	Vibration Amplitude(mm)	5~7		
	Deck Angle Range	-1~+5°		
EX Standard		ExdIIBT4/IECEX/ATEX		
Weight		1930	2285	2378
Dimension(mm)		2462x2042x2147	2707x2042x2147	2707x2042x2147

Features




- Desander & Desilter & Shale Shaker 3 in one unit for compact footprint.
- Polyurethane Material hydro cyclone for long life.
- Removable hydro cyclone assembly for adjust to be a shale shaker.
- Mechanical shaker deck angle adjustment while working.
- Patent tighten rubber sealing for shaker deck and screen for fine screen
- Heat treatment on complete shaker deck for High G force operation.
- Pretensioned Shaker screen for fast screen replacement.
- Famous Brand Vibration Motors : IEC Ex, ATEX and UL Certified

4.2.2 Desander

Desander Cut Point: + 40 Microns	Description
	Type: Desander without downstream drying shale shaker Model: GNWS-2SJ / GNWS-3SJ Application: For oil gas drilling un-weighted drilling mud. Features: Small footprint, economic choice, no consumable screens. Result: Wet cuttings, not recommended for Weighted mud and drying solids.
	Type: Desander with GNZS752 Series Mini Shale Shaker Screen Area: 1.4m ² Model: GNZJ752J-1S / GNZJ752J-2S Application: For oil gas drilling small drilling rig , CBM drilling, HDD, Water Well drilling. Features: Small footprint, economic choice, acceptable drying solids.
	Type: Fixed with 4 pcs screens, GNZS594 series large shaker has the screen area of esrt. 2.73 square meters. Model: GNZJ594J-2SJ/GNZJ594J-3SJ Application: large oil rig, large trenchless drilling rig, shield engineering, river dredging engineering, etc. Features: Large processing capacity, dry discharged drilling cuttings.

Model		GNZJ752J-1S/2S	GNZJ594J-2SJ	GNZJ594J-3SJ	GNWS-2SJ/3SJ
Capacity		120/240m³/h (528/1056GPM)	240m³/h (1056GPM)	360m³/h (1584GPM)	240/360m³/h (1056/1584GPM)
Desander Size(Inch)		10"			
Desander Qty		1/2 Pc	2 Pcs	3 Pcs	2/3 Pcs
Working Pressure		0.25~0.4Mpa			
Feeding Size		DN150			
Output Size		DN200			
Bottom Shaker Specs.	Shaker Model	GNZS752J	GNZS594J		N/A
	Vibration Mode	Linear Motion			
	Vibration Motor	2x0.75Kw	2x1.72Kw		
	Screen Qty	2 Panels	4 Panels		
	Screen Size	750x900mm	585x1165mm		
	Screen Area	1.35m²	2.73m²		
	Adjust G Force	≤7.1G(Adjustable)	≤7.5G(Adjustable)		
	Deck Angle Range	+2°	-1~+5°		
	EX Standard	ExdIIBt4/IECEX/A-TEX			
Weight(Kg)		1059/1114kg	1835kg	1924kg	502/559kg
Dimension: mm		1676×1754×1822	2462x2042x2147	2462x2042x2147	2177×1000×1901

4.2.3 Desilter

Desilter : Cut Point +20 Microns	Description
	<p>Type: Desilter without downstream drying shale shaker</p> <p>Model: GNWS-12NJ / GNWS-16NJ</p> <p>Application: For oil gas drilling un-weighted drilling mud.</p> <p>Features: Small footprint, economic choice, no consumable screens.</p> <p>Result: Wet cuttings, not recommended for Weighted mud and drying solids.</p>
	<p>Type: Desilter with GNZS752 Series Mini Shale Shaker Screen Area: 1.4m²</p> <p>Model: GNZJ752J-8NJ / GNZJ752J-12NJ</p> <p>Application: For oil gas drilling small drilling rig , CBM drilling, HDD, Water Well drilling.</p> <p>Features: Small footprint, economic choice, acceptable drying solids.</p>
	<p>Type: GNZS594 series large underflow vibrating screen matched with 4 mesh screens, with a mesh area of approximately 2.73 square meters.</p> <p>Model: GNZJ594J-12NSJ/GNZJ594J-16NJ</p> <p>Application: large oil rig, large trenchless drilling rig, shield engineering, river dredging engineering, etc.</p> <p>Features: Large processing capacity, and the processed drilling cuttings are very dry.</p>

Model		GNZJ752J-8NJ/12NJ	GNZJ594J-8NJ/12NJ	GNZJ594J-16NJ	GNWS-12NJ/16NJ
Capacity		120/240m³/h		360m³/h (1584GPM)	240/360m³/h (1056/1584GPM)
Desilter Size		4"			
Desilter Qty		8/12 Pcs		16 Pcs	12/16 Pcs
Working Pressure		0.25~0.4Mpa			
Feeding Size		DN150			
Output Size		DN200			
Bottom Shaker Specs.	Shaker Model	GNZS752J	GNZS594J		N/A
	Vibration Mode	Linear Motion			
	Vibration Motor	2x0.75Kw	2x1.72Kw		
	Screen Qty	2 Panels	4 Panels		
	Screen Size	750x900mm	585x1165mm		
	Screen Area	1.35m²	2.73 m²		
	Adjust G Force	≤7.1G(Adjustable)	≤7.5G(Adjustable)		
	Deck Angle Range	+2°	-1~+5°		
EX Standard		ExdIIBt4/IECEX/A-TEX			
Weight		1057/1097kg	1813/1839kg	1974kg	504/539kg
Dimension: mm		1676×1745×1719	2462x2042x2147	2462x2042x2147	2189×900×1511

4.3 Degasser

4.3.1 Vacuum Degasser



Model	GNZCQ270B	GNZCQ360B
Tank Diameter	920mm	
Capacity	≤270m ³ /h	≤360m ³ /h
Vacuum Degree	-0.02 ~ -0.04Mpa	
Handling Efficiency	≥95%	
Main Motor Power	22kW	37kW
Pump Motor Power	7.5kW	
Rotation Speed	700RPM	860RPM
Ex Standard	ExdIIBt4/IECEX/ATEX	
Suction Size	DN150	
Output Size	DN200	
Weight	1779mm	1815mm
Dimension: mm	2100x1605x1729mm	2100x1605x1729mm

Features

GNZCQ Series Vacuum Degassers are able to meet the needs of any applications, usually installed after the shakers. Each degasser effectively and efficiently removes gases from gas-cut mud, thus ensuring that the proper mud weight is pumped downhole. In doing so, the degassers are able to aid in the prevention of potential blowouts. Unlike the traditional vacuum degasser, GNZCQ vacuum degasser is a self-contained unit, GN Vacuum Degasser is monitored by level sensor to protect over suction of the fluids. The gas-cut mud is drawn into the degasser by a vacuum created by a regenerative vacuum without needing centrifugal pump. GN degasser can act as a big agitator for the drilling mud, which helps the treatment for desander and desilter.


4.3.2 Centrifugal Degasser



Model	GNLCQ300C
Liquid Inlet Size	20"
Liquid Outlet Size	8"
Gas Outlet Size	2"
Max Liquid Throughput	300m ³ /h
Max Gas Removed	30m ³ /h
Main Motor	22Kw
Fan Motor	2.2Kw
Weight	1093kg
Dimension	1148×1055×3430mm

Features

GNLCQ300C centrifugal degasser is a new type degasser, specialized in processing gas cut drilling fluid. Normally it is installed after shale shaker and widely used in various solids control system, and it is very important for recovering mud weight, stabilize mud viscosity performance, reduce drilling cost. Meantime it can be used as a big power blender. Its advantages are large capacity, high rate of degassing, less area required, low energy consumption, easy operation and maintenance.

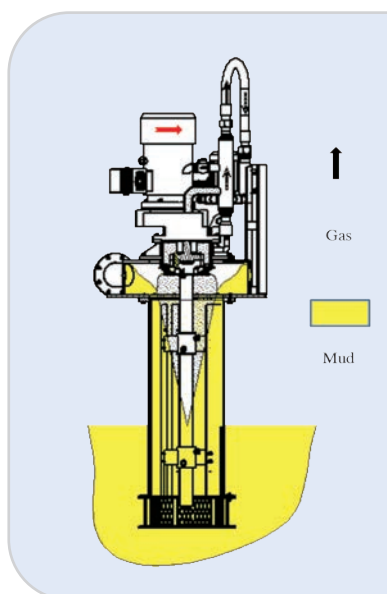

Working Principle:

Via the rotating impeller, the degasser sucks the drilling fluid into the vessel. The fluids will stay at a level higher than the gas cut drilling fluid and then a cylindrical liquid layer with inverted cone shape space in the middle will be formed. Drilling fluid is discharged from discharge port along a tangent line. With the impeller rotating, bubble breaks, gas will be extracted from liquid, and finally accumulate in the cone shape space as the lower density. Pressurizing unit(similar to exhaust fan) will suck air through the narrow channel between the air distribution disk and air separation ring into the discharge cone, and then gas manifold, braided hose and pressurized device to pressuring unit, finally discharge the gas out through pressuring device with pressure.

4.3.3 Mud Gas Separator



Model	Tank Diameter	Capacity	Inlet	Outlet	Ventline	Weight	Dimension:
GNZYQ1000A	1000mm	200~280 m ³ /h	4"	10"	8"	2411kg	2265×2000×5681mm


Features

GN Mud Gas Separator is designed for continued drilling in underbalanced conditions where dramatic pressure surges are normal. The GN Mud Gas Separator is manufacturing according to API and ISO Standard.

In dangerous "kick" conditions, the Mud Gas Separator allows operators to circulate the drilling fluid by removing large pockets of gas. The gas cut mud enters the flow line of the unit, where it hits a series of baffle plates. These baffle plates provide surface area for the dispersion of the gas cut mud. The mud is routed to solids control equipment for further processing while the separated gas travels to the flare line at the top of the unit to be vented at a safe distance from the rig and rig personnel.

4.4 Mud Agitator, Mud Gun


Mud Agitator

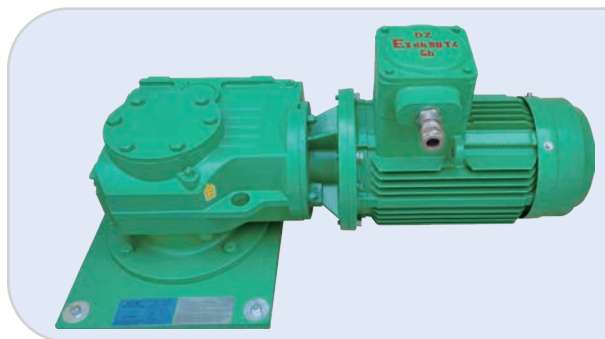

Model	Motor	Speed	Impeller	Impeller Qty	Ratio	EX Standard	Weight	Dimension:mm
GNJBQ030G	3kW	60/72RPM (50Hz/60Hz)	650mm	1	25:1	EXdIIBt4/ IECEX/ A-TEX	122kg	794×440×472.5
GNJBQ055G	5.5kW		850mm	1			197kg	960×540×598
GNJBQ075G	7.5kW		950mm	1			247kg	1065×540×616
GNJBQ075GD			800mm	2			247kg	
GNJBQ110G	11kW		1050mm	1			291kg	1187×540×616
GNJBQ110GD			850mm	2			291kg	
GNJBQ150G	15kW		1100mm	1			393kg	1287×640×683
GNJBQ150GD			950mm	2			393kg	
GNJBQ185G	18.5kW		1050mm	1			445kg	1307×640×698
GNJBQ220G	22kW		1100	1			516kg	1307×640×698

Remarks: Shaft and impeller will be provided by GN, but not including in the weight & dimension. Shaft is 15 Kg per meter.

Mud Gun

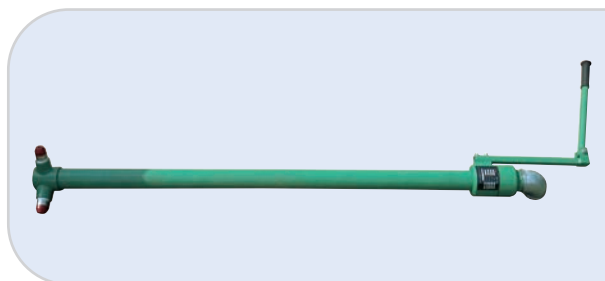

Model	GNNJQ50-3GA	GNNJQ50-3XA	GNNJQ80-3GA	GNNJQ80-3XA
Work Pressure	≤3.2 Mpa or ≤6.4 Mpa (Optional)			
Rotating Angle	0°	360°	0°	360°
Nozzle Qty.	3 pcs			
Gun Diameter	DN50		DN80	
Connection Size	2 inch	2 inch	3 inch	3 inch

4.5 Jet Mud Mixer

Mud Hopper



Model	Pressure	Capacity	Nozzle	Inlet	Outlet	Weight	Dimension
GNSLDSB	0.25~0.4Mpa	500-1500GPM (113-340m³/h)	40mm	DN150	DN150	174kg	1100×680×949mm
GNSLDMB		200-500GPM (45-113m³/h)	20mm	DN100	DN100	113kg	850×570×851mm


Jet Mud Mixer



Model	Capacity	Pressure	Motor	Inlet	Outlet	EX Standard	Weight	Dimension(mm)
GNSLH-750B	320m³/h	0.25~0.4Mpa	75kW	DN200	DN150	EXdIIBt4/ IECEX/A-TEX	1785kg	2200×1840×1150
GNSLH-550B	272m³/h		55kW	DN200	DN150		1675kg	2200×1840×1100
GNSLH-450B	200m³/h		45kW	DN150	DN150		1475kg	2200×1840×1135
GNSLH-370B	150m³/h		37kW	DN150	DN150		1460kg	2200×1840×1135
GNSLH-300B	120m³/h		30kW	DN125	DN150		1380kg	2200×1840×1100
GNSLH-220B	90m³/h		22kW	DN125	DN100		1167kg	1850×1540×1000
GNSLH-185B	65m³/h		18.5kW	DN100	DN100		1147kg	1850×1540×1030
GNSLH-150B	55m³/h		15kW	DN100	DN100		970kg	1850×1540×1030
GNSLH-110B	45m³/h		11kW	DN100	DN100		950kg	1850×1540×1030

Remarks: Electrical Control Cabinet should be quoted separately, not included.

4.6 Mud Tank

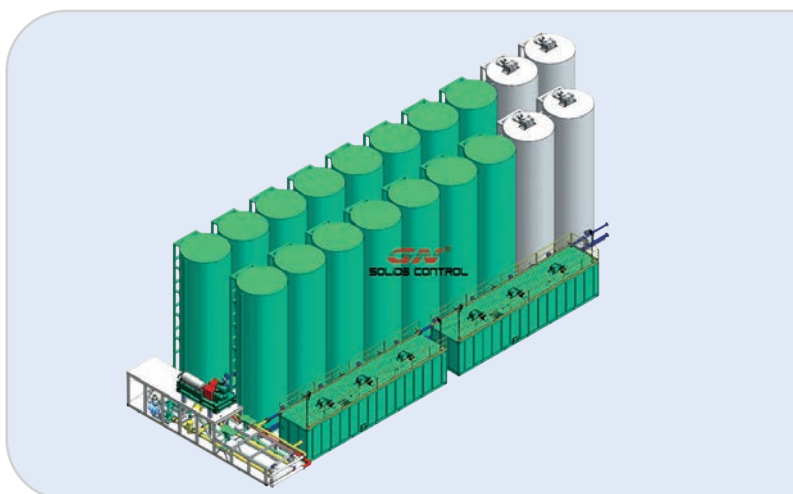

GN Solids Control designs and manufactures various types of tank including mud tank, water tank, oil tank, etc. GN Solids Control mud tanks are usually used to install solids control equipment, storage mud, mixing mud, etc. It meets utility request of the drilling solid control system, mud plant and solid-liquid separation system. According to different working conditions, mud tanks can be customized into horizontal mud tank, vertical mud tank and trailer mounted mud tank.

Part 5: Waste Management Equipment

5.1 Vertical Cuttings Dryer



Model:	GNCD930G	GNCD930G-VFD
Treating Capacity:	30~50Tons/H	
OOC output:	OOC≤5%	
Screen Max Diameter:	930mm	
Screen Opening:	0.25mm/0.35mm/0.5mm	
Rotation Speed:	900RPM	0-900RPM
G Force	420G	0-420G
Oil Tank capacity:	48L	
Air Knife Input Pressure:	0.69Mpa	
Air Knife Input Capacity:	4.8m³/m	
Main Motor:	55Kw(75HP)-4p, Exd II BT4	
Back Motor	N/A	11KW(15HP)
Oil Pump Motor:	0.55Kw(0.75HP)-4p, Exd II BT4	
Exd Standard	ExdIIBt4/IECEX/ATEX	
Weight	4250kg	4900kg
Dimension	2685x1290x1723mm	

Features

- More Application: Working for OBM and SBM.
- High G Force: Normal 420G @ 900RPM, optional to drive by VFD with variable speed.
- FAG Brand premium bearing.
- The Flights on the rotor is hard facing to HRC 65, longer life than our competitors.
- Special high pressure air knife design to clean the basket screen automatically to avoid the screen blinding especially for high viscosity mud and water based mud.

5.2 High G Drying Shaker




Model	GNZS594J-SGZJ
Vibration Mode	Linear Motion
Capacity(m ³ /h)	140(616GPM)
Vibration Motor(Kw)	2×1.94
Screen Qty(Pcs)	4
Screen Size: L×W(mm)	585×1165
Screen Area(m ²)	2.73
Adjustable G Force	≤8.2G
Vibration Amplitude(mm)	4.5 ~ 6.48
Deck Angle	-1 ~ +5°
Feeding Type	Hopper Feeder
Feeder Height(mm)	1065
EX Standard	ExdIIIBT4/IECEX/ATEX
Weight(Kg)	1590
L×W×H(mm)	2906×2020×1437

Features

- G force up to 8.0 adjustable for drying solids discharge.
- Mechanical shaker deck angle adjustable while working.
- Patent tighten rubber sealing for shaker deck and screen, long life and easy replacement.
- Shaker bottom deck made from Stainless Steel for long service life.
- Heat treatment on complete shaker deck for High G force operation.
- 4 Panel Pretensioned Shaker screen for fast screen replacement.
- Famous Brand Vibration Motors : IEC Ex, ATEX and UL Certified.
- Low Profile Feeder for easier cuttings transfer.

5.3 Screw Conveyor

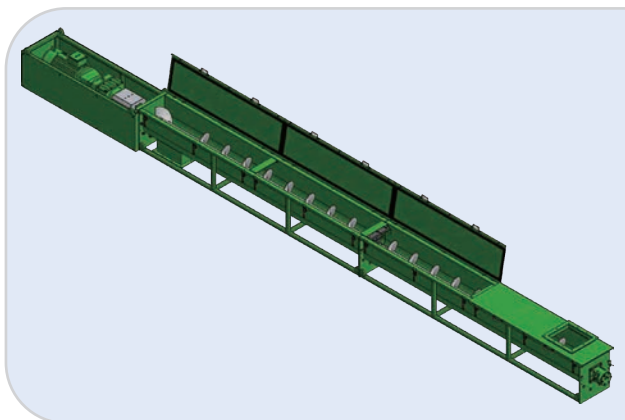

Model	Screw Diameter Inch/mm	Screw Length Ft/m	Capacity (Tons/Hour)	Motor Power (Kw)	Screw Speed (Rpm)
GNSC10B-24	10/250	24/7.3	15	4(5.4HP)	50-70
GNSC10B-36	10/250	36/11	15	5.5(7.5HP)	
GNSC10B-48	10/250	48/14.6	15	7.5(10HP)	
GNSC12B-24	12/315	24/7.3	20	5.5(7.5HP)	50-70
GNSC12B-36	12/315	36/11	20	7.5(10HP)	
GNSC12B-48	12/315	48/14.6	20	11(15HP)	
GNSC14B-24	14/350	24/7.3	30	7.5(10HP)	50-70
GNSC14B-36	14/350	36/11	30	11(15HP)	
GNSC14B-48	14/350	48/14.6	30	15(20HP)	
GNSC16B-24	16/400	24/7.3	45	11(15HP)	50-70
GNSC16B-36	16/400	36/11	45	15(20HP)	
GNSC16B-48	16/400	48/14.6	45	18.5(25HP)	
GNSC18B-24	18/450	24/7.3	45	15(20HP)	50-70
GNSC18B-36	18/450	36/11	45	18.5(25HP)	
GNSC18B-48	18/450	48/14.6	45	22 (30HP)	
Remarks: According to clients requirement, GN Provide customized equipment.					

Features

GN Solids utilizes a custom designed and constructed Screw Conveyor (Auger) as part of drilling waste management system. The Auger is designed with 12 feet per section which makes it a standard spare parts to interchange with each other. The anti-abrasive screw material lasts longer than our competitors. The Screw Conveyor (Auger) provides an efficient, low cost cuttings transport system for offshore and onshore drilling installations. The screw conveyor are manufactured to the highest safety standards and are fitted with protective grating or cover to prevent foreign objects for falling into the conveyor system, and to offer enhanced safety for all workers.

5.4 Inclined Plate Clarifier



Model	Max Flow	Inlet	Outlet	Sludge Outlet	Sludge Volume	Weight (KG)	Dimension(mm)
GNIPC-07B	7m ³ /h	4"	4"	4"	475	1460	1655x1655x1780
GNIPC-14B	14m ³ /h	4"	4"	4"	1025	2070	2495x1655x1780
GNIPC-21B	21m ³ /h	4"	4"	4"	770	2465	2465x1655x2315
GNIPC-35B	35m ³ /h	4"	4"	4"	1255	3320	3205x1655x2315
GNIPC-41B	41m ³ /h	6"	6"	4"	1580	3905	3685x1730x2315
GNIPC-55B	55m ³ /h	6"	6"	4"	2175	4865	4500x1730x2315
GNIPC-69B	69m ³ /h	8"x8"	8"	4"	3905	6555	4065x2595x2950
GNIPC-86B	86m ³ /h	8"x8"	8"	4"	4975	7880	4725x2595x2950
GNIPC-103B	103m ³ /h	8"x8"	8"	4"	2315	9070	5360x2595x2950
GNIPC-120B	120m ³ /h	8"x8"	8"	4"	3710	10340	6100x2595x2950
GNIPC-137B	137m ³ /h	12"x10"	10"	4"	3710	12295	4980x2695x4270
GNIPC-154B	154m ³ /h	12"x10"	10"	4"	3710	13350	5285x2695x4270
GNIPC-188B	188m ³ /h	12"x10"	10"	4"	3710	15740	5970x2695x4270
GNIPC-222B	222m ³ /h	12"x10"	10"	4"	3710	18385	6100x2695x4270
GNIPC-273B	273m ³ /h	12"x10"	10"	4"	3710	21390	6100x2695x4270

Features

GN Inclined Plate Clarifiers (IPC) is a high performance Lamella plate for removal of settle-able solids in a variety of waste streams. The lamella plate is made from stainless steel.

GN IPC incorporates inclined plate settling surfaces pitched at a 55° angle from the horizontal with uniform plate spacing. Due to plate angle the solids slide down the plates into the sludge hopper below the plate pack. This simple, inexpensive design, combined with sludge conveyor Auger makes the GN IPC easy to install, operate and maintain. Chemical like polymer pretreatment often improves solids removal efficiency. The use of chemical flocculants with GNIPC is based on system efficiency, application contaminant characteristics and cost.

5.5 Chemical Dosing Equipment

GNDU2000 series 20ft container chemical dosing equipment is mainly used for mixing of flocculation, coagulation or de-emulsifier. It works together with dewatering centrifuge to separate the ultra-fine solids from the mud or waste water, to get clean water for industry applications; or support the separation of waste sludge.



Chemical Dosing System	Model: GNDU-2000A
Three Chamber automatic Dosing Unit Model: GN-2000S	Include 20ft container with decoration, include electric control system, exhaust system, lighting system. Max powder adding capacity:1-6 Kg/Hr(Speed Adjustable) Tank Material: SS304 Hopper Volume:45 L Tank Capacity:2000L Output for concentration 0.1%:2000L/Hr, if aging time is 45 Min. Mud agitator: 3 sets Dosing pump: 2 sets, single pump capacity:2000L/h(adjustable) Dimension:2000x1400x1500mm Including Ex liquid level meter, Ex electromagnetic flow meter, Ex solenoid valve, relief valve, buffer, filter and pressure gauge, etc accessories.
Single tank chemical Dosing Unit Model: GN-2000L	Tank Material: Outer material is carbon steel, inner material is PE Dissolving Tank Volume: 2000L Dissolving Tank Dimension 1400x2200mm(Agitator included) Mud agitator: 1 set Dosing pump: 2 sets, single pump capacity:530L/h(adjustable) Attached with Magnetism rolling board level meter, relief valve, buffer, filter and pressure gauge, etc accessories.

Part 6: Transfer Pumps

6.1 Centrifugal Pump




Model	Flow	Lift	Motor	Speed	Impeller
GNSB8×6C-14J	320m ³ /h	35m	75kW	1450RPM(50Hz)	14in
GNSB8×6C-12J				1750RPM(60Hz)	12in
GNSB8×6C-13J	272m ³ /h	35m	55kW	1450RPM(50Hz)	13in
GNSB8×6C-11J				1750RPM(60Hz)	11in
GNSB6×5C-13J	200m ³ /h	35m	45kW	1450RPM(50Hz)	13in
GNSB6×5C-10J				1750RPM(60Hz)	10in
GNSB6×5C-12J	150m ³ /h	30m	37kW	1450RPM(50Hz)	12in
GNSB6×5C-9.5J				1750RPM(60Hz)	9.5in
GNSB5×4C-13J	120m ³ /h	35m	30kW	1450RPM(50Hz)	13in
GNSB5×4C-11J				1750RPM(60Hz)	11in
GNSB5×4C-12J	90m ³ /h	30m	22kW	1450RPM(50Hz)	12in
GNSB5×4C-10J				1750RPM(60Hz)	10in
GNSB4×3C-13J	65m ³ /h	35m	18.5kW	1450RPM(50Hz)	13in
GNSB4×3C-12J				1750RPM(60Hz)	12in
GNSB4×3C-12J	55m ³ /h	28m	15kW	1450RPM(50Hz)	12in
GNSB4×3C-10J				1750RPM(60Hz)	10in
GNSB4×3C-11J	45m ³ /h	25m	11kW	1450RPM(50Hz)	11in
GNSB4×3C-9.5J				1750RPM(60Hz)	9.5in
GNSB3×2C-9J	35m ³ /h	35m	7.5kW	1450RPM(50Hz)	9in
GNSB3×2C-8J				1750RPM(60Hz)	8in

Remarks: Spare Parts interchangeable with Mission pump.

Features:

GN SB Series Centrifugal pump is used for transferring drilling mud. It can be used as feeding pump for desander, desilter, or used as mixing pump for Jet Mud Mixer. Also it can be used as trip pump, and supercharging pump for rig mud pump. All GN model centrifugal pump use tungsten carbide mechanical seal, with famous brand Bearing. And spare parts interchangeable with most of the international Brand pump which helps customer to source spare parts easily. Open impeller design that lowers axial thrust loads, and make it easier for installation, repair and maintenance.

6.2 Shear Pump

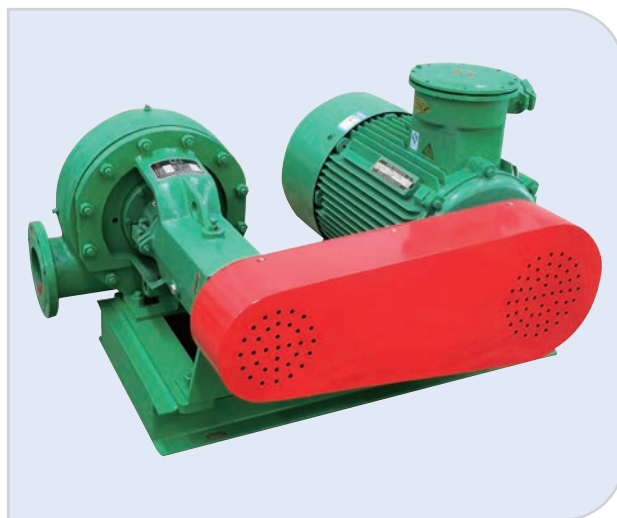

Model	Flow	Lift	Motor	Speed	EX Standard	Weight	Dimension(mm)
GNJQB6X5C-550	155m ³ /h	32m	55kW	1900RPM	EXdIIBt4/ IECEX/A-TEX	965kg	1333x1000x931mm



Features:

The GN shear pump reduces the cost of mixing polymers and clays while improving mud properties. Shearing the polymers eliminates fish eyes and prevents polymer chaining (long strings), which cannot pass through the shaker screens. The GN shear pump is available as a belt-driven or diesel-driven package including a hopper, mud gun, and transfer line orifice plate. A complete system with skid, tanks, and piping are also available.

GN Shear Pump impeller is specially designed to have a wider flow pass and smooth vanes, with larger flow area and smooth fluid pass, making the shear pump reach the internationally advanced level in shear pump efficiency and energy-saving, 10% higher than similar products. The shear pump has adopted a shell thicker than normal one, with rational pass and less turbulence.

GN Shear pump Impeller and shell are made of high wear resistant cast irons, with longer servicing life. The shear pump shaft has high strength that can bear certain load, reducing shafts deflection and extending seals service life; The shaft is lubricated with lubricants and lubricating grease and the oil seal is made of special structure and materials, suitable for high and low temperatures and complicated environment; Front opening structure is used for convenient installation, repair and maintenance.

6.3 Screw Pump

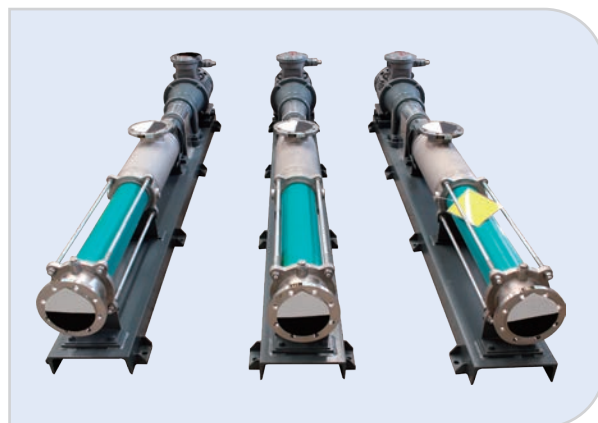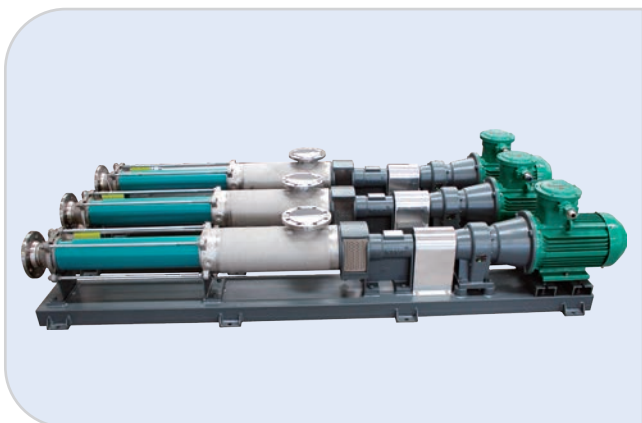

Model	Flow	Pressure	Motor	Max Speed	Inlet	Outlet	Ex Standard	Weight	Dimension (mm)
GNG10-040C	10m ³ /h	0.3MPa	4kW	244RPM	DN80	DN80	EXdIIBt4/ IECEX/ A-TEX	245kg	2245×320×550
GNG20-055C	20m ³ /h	0.3MPa	5.5kW	210RPM	DN80	DN80		323kg	2450×340×562
GNG30-075C	30m ³ /h	0.3MPa	7.5kW	258RPM	DN100	DN100		386kg	2761×370×600
GNG40-110C	40m ³ /h	0.3MPa	11kW	252RPM	DN100	DN100		454kg	3270×370×665
GNG50-110C	50m ³ /h	0.3MPa	11kW	273RPM	DN125	DN125		608kg	3790×400×782
GNG60-150C	60m ³ /h	0.3MPa	15kW	225RPM	DN125	DN125		649kg	3322×550×740
GNG70-220C	70m ³ /h	0.3MPa	22kW	230RPM	DN150	DN150		875kg	3740×420×785
GNG80-220C	80m ³ /h	0.3MPa	22kW	283RPM	DN150	DN150		875kg	3740×420×785
GNG90-220C	90m ³ /h	0.3MPa	22kW	205RPM	DN150	DN150		875kg	3740×420×785


Features:

The GNG Series Positive Displacement Pump is a single screw pump. The pump is an ideal pump for feeding to decanter centrifuge without shearing or agitating the drilling mud. The main parts are screw shaft (rotor) and screw shaft bushing (stator). Because of the special geometry shape of the two parts, they form pressurize capacity separately. The fluids flow along with the shaft, inner flow speed is slow, capacity remains, pressure is steady, so it will not generate vortex and agitating. The shaft of the pump is made from Stainless steel, GNG series pump is available for option with complete stainless steel body,

It can drive by coupler, or adjust the speed by using variable speed motor, Triangle V-belt, gear box, etc G series positive displacement pump is with less accessories, compact structure, small volume, easy maintenance, rotor and stator are wear parts of this pump, it is convenient to replace.

The stator is made of elastomeric material, so it has particular advantages than other pump to transfer the fluids of high viscosity and hard suspended particles included.

6.4 Submersible Slurry Pump

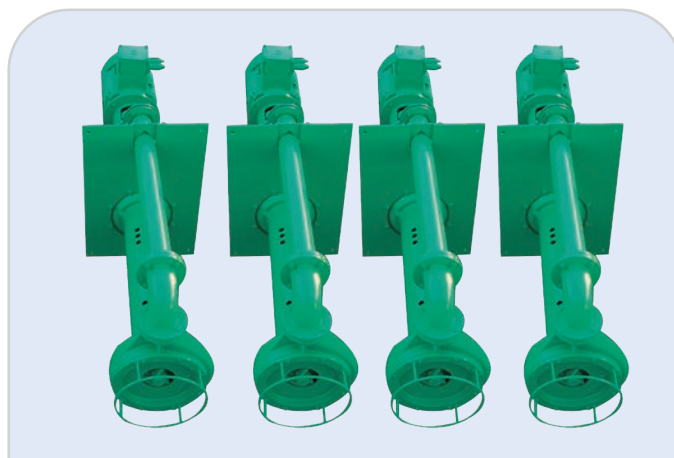

Model	Capacity (m ³ /h)	Height (m)	Motor Power (kw)	Motor Rotating Speed (r/min)	Outlet (Diameter)
GN50YZ20-18B	20m ³ /h	10m	3kW	1450RPM(50Hz)	DN50
				1750RPM(60Hz)	
GN50YZ40-10B	40m ³ /h	10m	5.5kW	1450RPM (50Hz)	DN50
				1750RPM (60Hz)	
GN80YZ50-20B	50m ³ /h	20m	7.5kW	1450RPM(50Hz)	DN80
				1750RPM (60Hz)	
GN80YZ80-20B	80m ³ /h	20m	11kW	1450RPM(50Hz)	DN80
				1750RPM (60Hz)	
GN100YZ100-30AB	90m ³ /h	20m	18.5kW	1450RPM(50Hz)	DN100
				1750RPM (60Hz)	
GN100YZ100-30B	100m ³ /h	30m	22kW	1450RPM(50Hz)	DN100
				1750RPM (60Hz)	
GN100YZ100-30ZB	120m ³ /h	31m	30kW	1450RPM(50Hz)	DN100
				1750RPM (60Hz)	
GN100YZ160-38AB	150m ³ /h	35m	37kW	1450RPM(50Hz)	DN100
				1750RPM (60Hz)	
GN100YZ160-38B	160m ³ /h	38m	45kW	1450RPM(50Hz)	DN100
				1750RPM (60Hz)	
GN150YZ250-40B	250m ³ /h	24m	55kW	1450RPM(50Hz)	DN150
				1750RPM (60Hz)	

Remarks: The Weight and dimension is for the standard submersible length pump: 1.3m

Features:

GN YZ Series Submersible slurry pump is with structure of vertical single stage and single suction system overhung centrifugal pump, it is made of abrasion-resistant alloy, it can transfer medium with high concentration particle. The normal submersible length is 1.3m, customized length is available. There is no bearing and Gland Seal between impeller and pump body, so the slurry pump is maintenance-free and high temperature resistance, the slurry pump is the ideal centrifugal pump for feeding to decanter centrifuge, and feeding from mud pit for to the shale shakers on the mud system, it can also be used as feeding pump for desander and desilter.

6.5 Vacuum Pump

Waste vacuum pump, also named as solids transfer pump. With special structure design, it can be used at tough environmental for solids transfer, high working performance and less maintenance. The pump can transfer material with high gravity and high density, solids content max. up to 80%.



GN Sludge Vacuum Pump Parameter

Model	GNSP-40B	GNSP-20B	GNSP-10B
Max Capacity(m³/h)	40m³/h	20m³/h	10m³/h
Inlet/Outlet Size(Inch)	4”(114mm)	4”(114mm)	3”(89mm)
Vacuum Degree	25”HG (Mercury Column)	85Kpa/25 inch HG(Mercury Column)	
Max Suction Distance(m)	50m		
Max Discharge Distance(m)	1000m	500m	
Max Solids Content	80%		
Max Solids Size(mm)	75mm	50mm	
Pressure Request	550Kpa-785Kpa (80-114PSI)	550Kpa-690Kpa (80-100PSI)	
Air Demand	17m³/min (600CFM)	8m³/min(280CFM)	4.3 m³/min(150CFM)
Weight(kg)	892kg	386kg	320kg
Dimension: L×W×H(mm)	1690×1468×1983mm	1421×900×1448mm	1283×800×1370mm


Material transfer applications

- 1) Waste mud and waste solids discharged from shale shaker, mud cleaner and centrifuge transfer
- 2) Drilling mud transfer
- 3) Waste pit cleaning
- 4) Hazardous waste recovery
- 5) Oil sludge, tank bottoms residual removal and transfer
- 6) Barge holdings and vessel bottom clean out
- 7) Bulk tank and silo transfer of material
- 8) Sand; Course, fine, conventional and frac sand
- 9) Diatomaceous earth
- 10) Animal waste etc.

Part 7: Industry Application

7.1 Oil & Gas Drilling Solids Control System


GN Solids Control manufactures all solids control equipment. Mud tanks are also designed and manufactured to compose whole mud systems to meet the demands of drilling rigs from 250HP to 3000HP. As a solids control manufacturer owns USA API and ISO certifications, GN Solids Control also certified by Europe CE for exporting to developed countries.

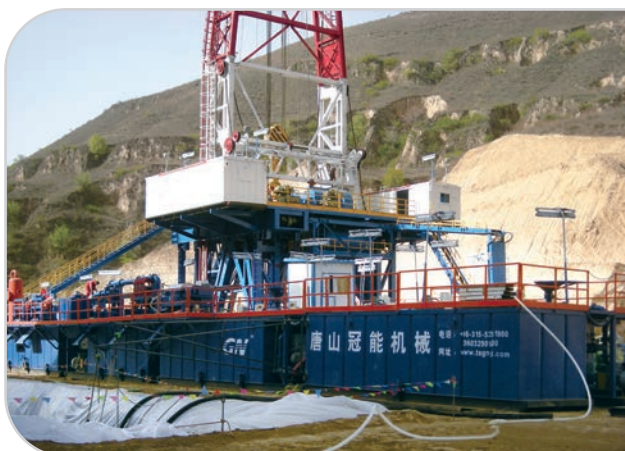


7.2 Drilling Waste Management System

GN Solids Control provides turnkey solutions for closed loop drilling mud and drilling waste management system. Key equipment includes Hi-G Shaker, Cuttings Dryer, Decanter Centrifuge, Flocculating Dosing Unit, Sludge Solidification Unit, and Thermal Desorption Unit. They can be used to treat WBM, OBM and SBM.

Typical WBM Treating System Layout

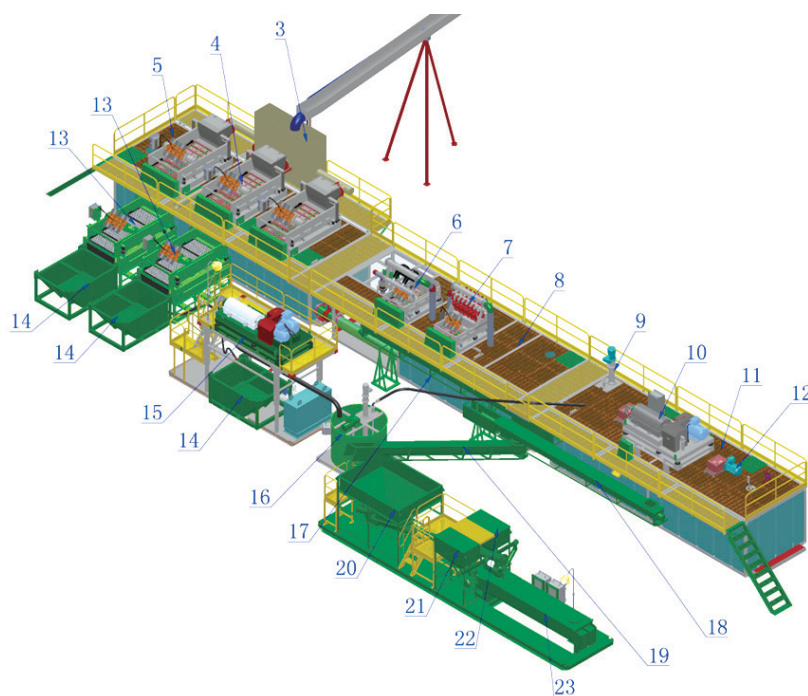

Typical OBM Treating System Layout

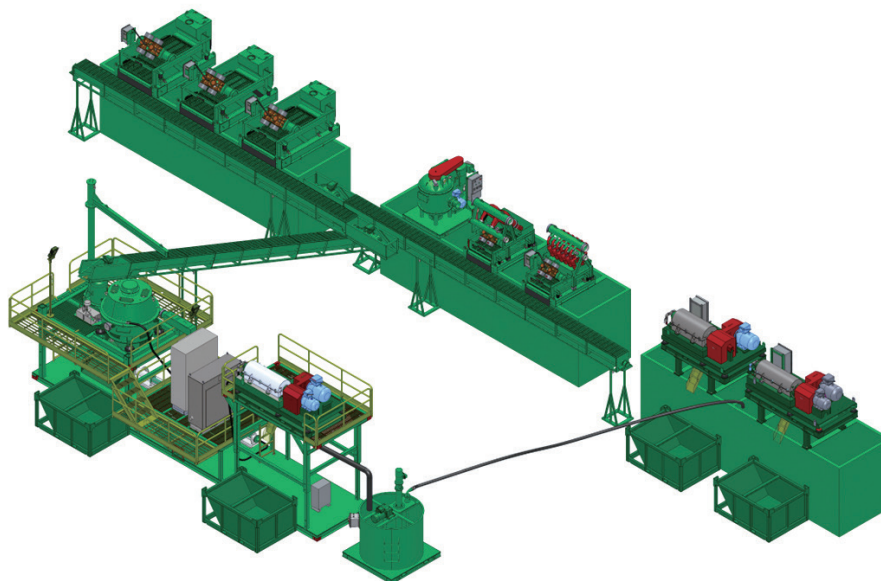

Drilling Waste Management Projects



European Treating Plant Project



Shell (Sichuan) Project



Siberia Russia Project



Africa OBM Treating Project



Inner Mongolia WBM Treating Project





Argentina WBM Treating Project

7.3 Oil Sludge Treatment

GN Oil Sludge Treatment System uses chemicals to wash the oil sludge when heat to 60-70 C degree. After washing, the slurry is pumped to GN equipment to separate into oil, water and solids. The recycled water can be reused in the washing process, and the oil is clean enough to sell to the refinery company, the discharged solids with oil can be sent to bio-degradation or thermal unit for final disposal.

Typical Oily Sludge source:

- Oil tank bottom sludge
- Oil sludge from refinery plant
- Drilling waste oil sludge

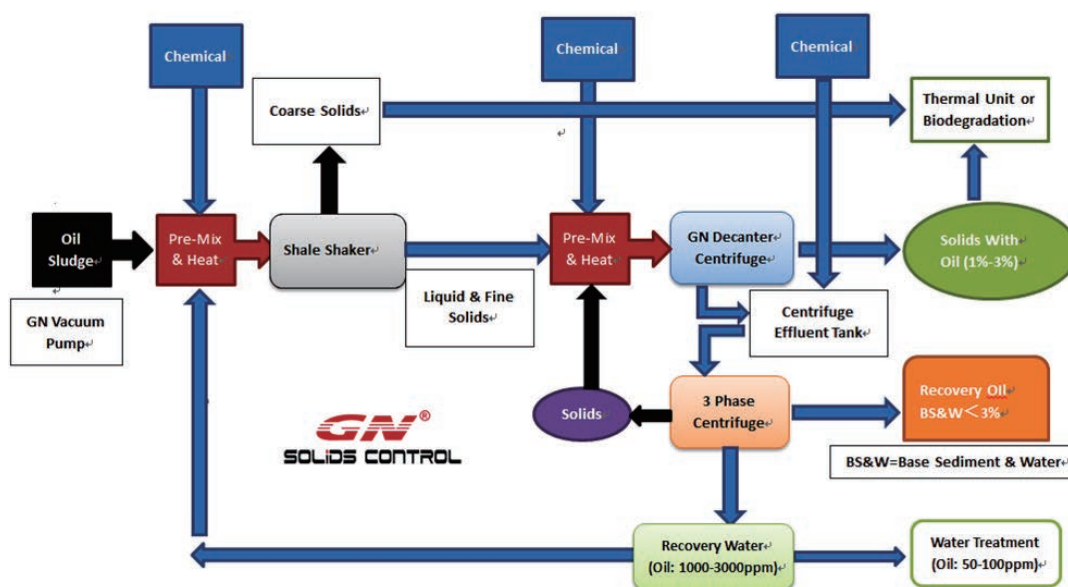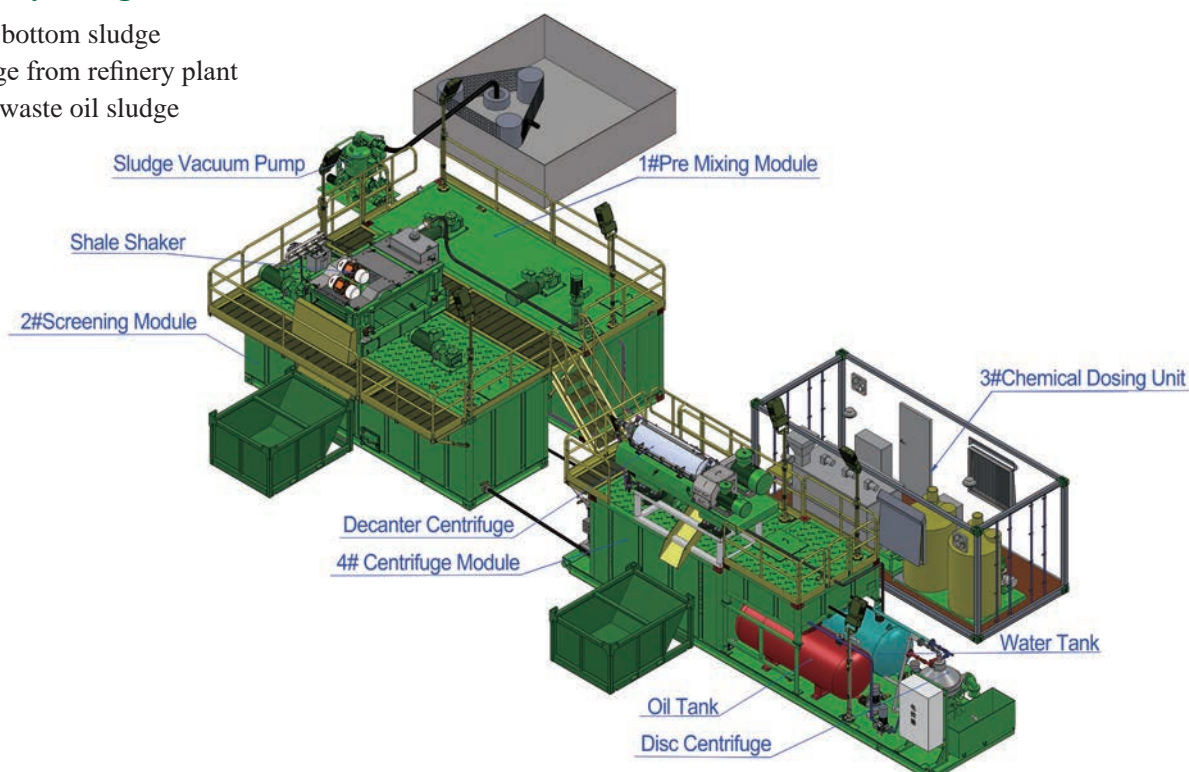

7.4 Trenchless/HDD Mud Recycling System

GN is committed to research and develop trenchless mud recycling system, mud mixing system, decanter centrifuge etc. As an international famous brand, GN products have been exported to over 70 countries and regions, and GN has set up branches & service stations in 8 countries. GN Solids America is GN USA branch.





Type	High Configuration			
System Function	Mud Recovery, Mud Mixing, Mud Storage			
Model No.	GNMS-200B	GNMS-400B	GNMS-600B	GNMS-800B
Capacity	50 m ³ /h	100m ³ /h	150m ³ /h	200m ³ /h
Separation Grades	2	2	2	3
Separation Size	20 micron	20 microns	20 micron	20 micron
System Volume	5 m ³	8.5 m ³	15 m ³	19.5 m ³

Advantages of GN Recycling Equipment

- Preferred supplier of well-known rig manufacturers and contractors.
- Leading capabilities on both hardware and software, welcome for facility site visiting.
- Certified with US API, Europe CE and Russia CU-TR standard.
- High level material selected: stainless steel shaker deck bottom frame, Italy OLI vibration motor and Siemens electric components.
- Independent research and manufacturing on 4-Stage cleaning equipment: Shale Shaker, Desander, Desilter and Decanter Centrifuge.

7.5 TBM & Bored Piling Mud Cleaning

GN Solids Control is providing the assembled-type mud cleaning system for piling and TBM projects. The production line includes models with capacity of 120m³/h, 240m³/h, 360m³/h, 500m³/h, 1000m³/h, 1500m³/h, 2000m³/h, 3000m³/h. In addition, GN also provides big bowl decanter centrifuge and chemical dosing system for treating the mud to discharge-able water.

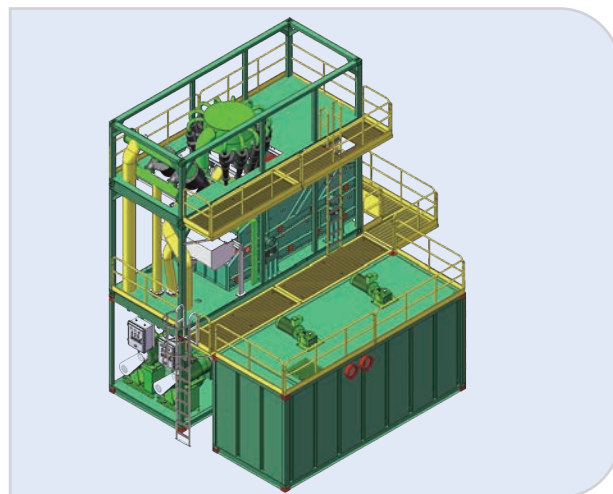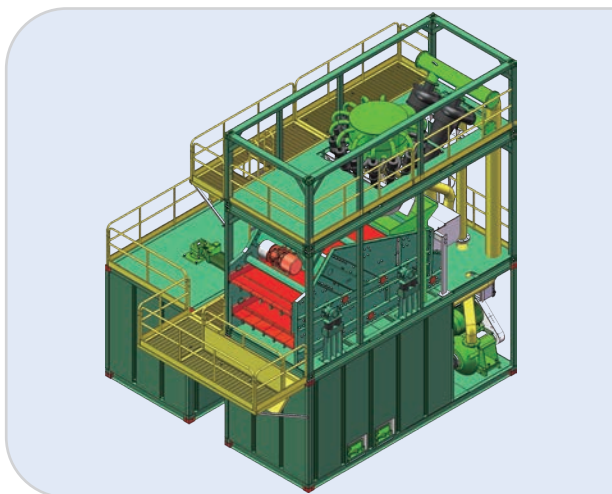

Bored Pile Desander



Configuration Type	Economic Configuration		
System Function	Mud Cleaning/Recycling		
Model	GNMS-200D	GNMS-500D	GNMS-1000D
Capacity	50m ³ /h	120m ³ /h	240m ³ /h
Cleaning Stage	2 Stages	2 Stages	2 Stages
Treating Precision	20μm	40μm	40μm
System Volume	1m ³	1~5m ³	1.5m ³

7.6 Industrial Solids & Liquid Separation System

As a professional manufacturer of solids and liquid separation equipment, GN Solids Control provides many kind of separation equipment includes vibration screen equipment, horizontal decanter centrifuge, hydro cyclone separation equipment, gravity settlement separation equipment, and 3-Phase separation equipment. According to different separation request, GN is able to provide customized solution to maximize the treating result and reduce the cost for customers' biggest profit.



Mining & Core Drilling Mud Solids and Liquid Separation



Water Well Drilling Mud Recycling



Geothermal Well Drilling Mud Cleaning



Mining Slurry Solids and Liquid Separation



Dredging Slurry Solids and Liquid Separation



Hydrovac Slurry Treatment System

Equipment Separation Cut Point

Particle Size (Microns)	0-2	2-5	5-20	20-40	40-60	60-1000	1000-2000	>2000
Solids Control Stages	4 th Stage			3 rd Stage	2 nd Stage	1 st Stage		
Shale Shaker	No				API 270/325	≤API 230	API 10/20	≤API 10
Desander	No				Yes			No
Desilter	No			Yes			No	
Decanter Centrifuge	Flocculant	High Speed	Middle Speed	Middle Speed	Low Speed			No
Inclined Plate Clarifier	Flocculant	Flocculant	Yes					
Vertical Cuttings Dryer	No					Solids Should be above 250 microns		
Centrifugal Pump	Yes						No	

Remarks: The above table is for reference only.



SOLIDS CONTROL

Company : Hebei GN Solids Control Co.,Ltd

Address:No.3 Industry Road,Dachang Chaobai River Development Area,Langfang, China 065300

Location: 40KM to Beijing International Airport

Tel: +86-316-5276989 / 5276988 / 5276990

Fax: +86-316-5276997 / 5276990

Email: sales@gnsolidscontrol.com

Web: www.gnsolidscontrol.com



SOLIDS AUSTRALIA

Company : GN Solids Australia Pty Ltd

Address:Unit 20.256-258 Musgrave Road,Coopers Plains QLD 4108

Tel: +61-467-718-611

Email: sales@gnsolidscontrol.com

Web: www.gnsolidsaustralia.com



SOLIDS AMERICA

Company: GN Solids America LLC

Add: 6710 Windfern Road, Houston, TX 77040, USA

TEL: +1-713 377 2984 / 1-832-288-5917

Email: usa@gnsolidscontrol.com

Web: www.gnsolidsamerica.com



SOLIDS RUSSIA

Add: Moscow, Russia

Tel: +7-917-526-9988 / +7-968-950-3149

Email: sales@gnsolidscontrol.com

Web: www.gnsolidscontrol.ru
